



**Experience easy. No set up. No adjustments. No waste.**

**BradyPrinter i5300 Industrial Label Printer**

# About BRADY



Once you have worked with BRADY, our name will stick with you, (just like our labels) because BRADY is one of the world's leading labelling and identification specialists.

## Innovative

At BRADY we continue to improve. We have many customers from all industries, and we strive to be ahead of their needs by continuing to invest in research for even more performant solutions. By developing more user-friendly and efficient concepts, we give our thousands of customers the best in the market.

## Strength

At BRADY, we believe our biggest strength is the wide range of identification and safety solutions we can offer our customers, whether it's labelling the smallest component or complete signage for an entire warehouse. We're also proud to offer many products and services - from printers, scanners and software to service contracts and on-site training - that compliment any identification job. And don't forget, our wide network of expert distributors can always offer you a tailor-made solution to meet your specific requirements.

## Trust

For over a hundred years, BRADY has been connected with quality, trust and stability. We demand the best for your products and services, because we know, better than anyone, the importance of good and reliable identification. Identification looks like a small detail, but every professional knows that this kind of detail is crucial to any business.

## Inform

We also have specialised dealers in your region, who can answer all your identification, safety and labelling questions, specific to your activity. They will be happy to provide you with all kinds of options and solutions with no obligation.

Microsoft is a trademark of Microsoft Corporation, Bluetooth is a trademark of Bluetooth Sig, Inc., Android is a trademark of Google Inc.



Brady products are sold on the condition that the purchaser will test them in actual use and determine for himself/herself their suitability to his/her intended purpose. Brady warrants to the purchaser that Brady products are free from defects in material and workmanship but limits its obligation under this warranty to the replacement of the product which has been shown to Brady's satisfaction to have been defective at the time of its purchase.

The warranty does not extend to any persons who have acquired the product from the purchaser. It is in lieu of any other warranty, including every warranty of sale-ability, marketability or suitability for the intended purpose, and is also in lieu of any other obligation or liability on the part of Brady.

Under no circumstances will Brady be liable for losses, damage, costs or subsequent damage of whatever nature which may arise in connection with the use of, or inability to use, Brady's products.

# Experience easy. No set up. No adjustments. No waste.

## BradyPrinter i5300 Industrial Label Printer

### The Brady Advantage

When it comes to identification, safety and compliance, there's a clear advantage to working with Brady. We put our customers first in everything we do.

Our goal is to give you an unrivalled customer experience. We are relentlessly committed to performance and excellence - in our products, services and people.

Our products and solutions perform in ways that others simply can't match. Our people perform in ways that regularly exceed your expectations. And our focus and discipline work toward solid, long-term performance for our customers.

In short, Brady is the company you trust when performance matters most.

Learn more about the Brady Advantage at:  
[www.bradyeurope.com](http://www.bradyeurope.com)

### Table of contents

4	Seriously easy. Really.
6	The right printer for the way you work
8	Printer options, kits and accessories
10	Key features
12	Easy. Inside and out.
14	Making it happen
19	Going the distance
20	Master material index
25	Product and general purpose identification
30	Electronics identification
33	Electrical / Datacom identification
36	Wire and cable identification - Datacom/Electrical
47	Facility & safety identification
57	Laboratory identification
64	Ribbons
66	Software
67	Printer specifications



BradyPrinter i5300  
Industrial Label Printer



Compatible labels  
& ribbons



Software for label creation  
and data integration




Printer technical  
specifications

# Seriously easy. Really.

When you're focused on efficiency, every process counts, including the steps it takes to print. So why not make it easier? Knowing everyone recognizes the value of a hassle-free experience, Brady created the BradyPrinter i5300 Industrial Label Printer. It's Intuitive. It's easy to operate. And, it's built for efficiency.

- **No waste:** prints on the very first label to maximize material use, and cut costs
- **Fast setup:** 20-second material changeovers and drop-lock-print technology
- **Time-saving features:** prints faster and pauses, resumes and stores jobs in an adjustable queue
- **Precision:** excellent small font rendering on smaller labels (5.08 mm)
- **Performance-plus construction:** ideal for printing both high-volume and high-mix jobs

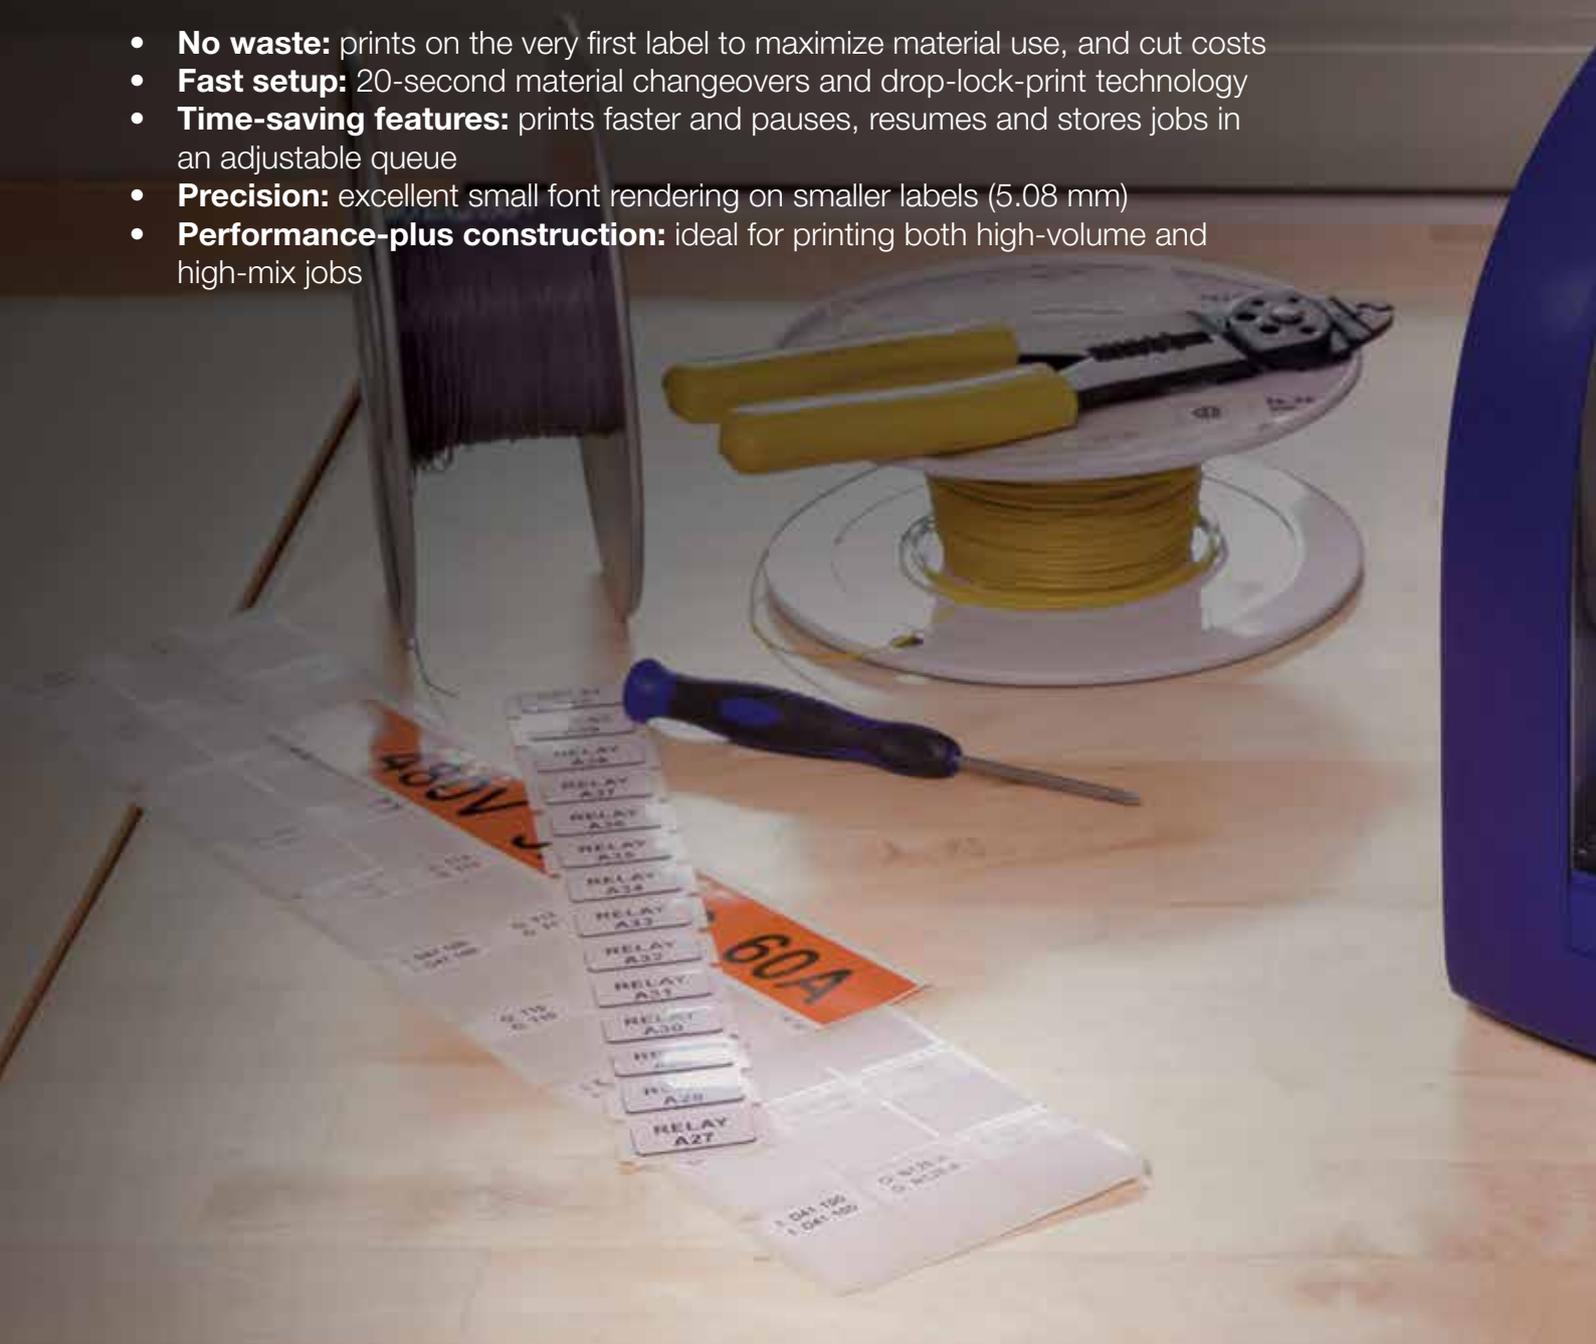



# The right printer for the way you work

## Automatically fine-tuned, simple and intuitive

Precision printing with 20-second material changeovers and zero waste

### BradyPrinter i3300 Industrial Label Printer



Zero calibration, zero wasted labels. A no-fuss, midvolume industrial printer using revolutionary B30 / B33 drop-in ribbons and label rolls that change out in 20 seconds with no manual adjustments for energy, speed or sensor placement. Ideal for high-mix printing, the i3300 includes a built-in auto cutter and prints on a wide range of materials, including labels as small as 6 mm. So simple and intuitive, you'll wonder how you ever printed efficiently without it.

(300 dpi)

### BradyPrinter i5300 Industrial Label Printer



Zero calibration, zero wasted labels, with higher-volume duty cycle and ultra-precise printing. Prints on a very wide range of B30 / B33 materials with exceptional accuracy on labels as small as 5 mm. For ultimate high-mix printing with 20-second no-adjustment material changeovers, built-in auto-cutting and optional save-to-printer job lists for a quick way to print commonly used labels, and overwrite-protected labels away from the PC. When you're focused on efficiency, every process counts — let simplicity drive your productivity.

(300 dpi or 600 dpi)

## Manually fine-tuned and technical

Customize printing one setting at a time and use specialty print modes

### BradyPrinter i5100 Industrial Label Printer



Mid-volume printer that detects installed Brady parts, advises how to set the sensor and provides auto-setup in Brady software. Its enhanced communication makes high-mix labeling faster and more intuitive. Prints on a wide range of materials including labels as small as 5 mm. An optional auto-cut model is available.

(300 dpi or 600 dpi)

### BradyPrinter i7100 Industrial Label Printer



Both heavy-duty and precise, here's a printer that can go the distance. It prints on a very wide range of materials, including labels as small as 3 mm. Printing and setup are manually fine-tuned and optional auto-peel, internal rewind and autotcut models are available.

(300 dpi or 600 dpi)

# Printer options



This i5300 Industrial Label Printer comes in a cardboard box. It ships with a Brady WorkStation Basic Design Suite, a Power Cable, a USB Cable, a Stylus, a cleaning kit, a QuickStart Guide, a Jump drive with How To Videos and 3rd Party Win Driver.

## Printers - 300 dpi

Article No.	Order Ref.	Description
151274	I5300-C-EU	BradyPrinter i5300 - EU
310339	I5300-C-EU-LAB	BradyPrinter i5300 - EU with Brady Workstation LAB Suite
310341	I5300-C-EU-PWID	BradyPrinter i5300 - EU with Brady Workstation PWID Suite
310343	I5300-C-EU-SFID	BradyPrinter i5300 - EU with Brady Workstation SFID Suite
151272	I5300-C-NA	BradyPrinter i5300 - NA
310351	I5300-C-NA-LAB	BradyPrinter i5300 - NA with Brady Workstation LAB Suite
310353	I5300-C-NA-PWID	BradyPrinter i5300 - NA with Brady Workstation PWID Suite
310355	I5300-C-NA-SFID	BradyPrinter i5300 - NA with Brady Workstation SFID Suite
151276	I5300-C-UK	BradyPrinter i5300 - UK
310345	I5300-C-UK-LAB	BradyPrinter i5300 - UK with Brady Workstation LAB Suite
310347	I5300-C-UK-PWID	BradyPrinter i5300 - UK with Brady Workstation PWID Suite
310349	I5300-C-UK-SFID	BradyPrinter i5300 - UK with Brady Workstation SFID Suite

## Printers - 600 dpi

Article No.	Order Ref.	Description
151283	I5300-600C-EU	BradyPrinter i5300 - EU
310852	I5300-600-EU-LAB	BradyPrinter i5300 - EU with Brady Workstation LAB Suite
310854	I5300-600-EU-PWID	BradyPrinter i5300 - EU with Brady Workstation PWID Suite
310856	I5300-600-EU-SFID	BradyPrinter i5300 - EU with Brady Workstation SFID Suite
151281	I5300-600C-NA	BradyPrinter i5300 - NA
310864	I5300-600-NA-LAB	BradyPrinter i5300 - NA with Brady Workstation LAB Suite
310866	I5300-600-NA-PWID	BradyPrinter i5300 - NA with Brady Workstation PWID Suite
310868	I5300-600-NA-SFID	BradyPrinter i5300 - NA with Brady Workstation SFID Suite
151285	I5300-600C-UK	BradyPrinter i5300 - UK
310858	I5300-600-UK-LAB	BradyPrinter i5300 - UK with Brady Workstation LAB Suite
310860	I5300-600-UK-PWID	BradyPrinter i5300 - UK with Brady Workstation PWID Suite
310862	I5300-600-UK-SFID	BradyPrinter i5300 - UK with Brady Workstation SFID Suite

## Accessories


Article No.	Order Ref.	Description
148703	148703	Media Wiper
153661	I5300-PH-300D	i5300 Print Head 300 dpi
153662	I5300-PH-600D	i5300 Print Head 600 dpi
153663	I5300-PR-115MM	i5300 Print Roller
133251	PCK-6	Printer Cleaning Kit, Thermal Transfer Printers
142115	142115	Replacement Stylus 3 Pack

## WiFi printers - 300 dpi

Article No.	Order Ref.	Description
151275	I5300-C-EU-WF	BradyPrinter i5300 with Wifi - EU
310340	I5300-C-EU-WF-LAB	BradyPrinter i5300 with Wifi - EU with Brady Workstation LAB Suite
310342	I5300-C-EU-WF-PWID	BradyPrinter i5300 with Wifi - EU with Brady Workstation PWID Suite
310344	I5300-C-EU-WF-SFID	BradyPrinter i5300 with Wifi - EU with Brady Workstation SFID Suite
151273	I5300-C-NA-WF	BradyPrinter i5300 with Wifi - NA
310352	I5300-C-NA-WF-LAB	BradyPrinter i5300 with Wifi - NA with Brady Workstation LAB Suite
310354	I5300-C-NA-WF-PWID	BradyPrinter i5300 with Wifi - NA with Brady Workstation PWID Suite
310356	I5300-C-NA-WF-SFID	BradyPrinter i5300 with Wifi - NA with Brady Workstation SFID Suite
151277	I5300-C-UK-WF	BradyPrinter i5300 with Wifi - UK
310346	I5300-C-UK-WF-LAB	BradyPrinter i5300 with Wifi - UK with Brady Workstation LAB Suite
310348	I5300-C-UK-WF-PWID	BradyPrinter i5300 with Wifi - UK with Brady Workstation PWID Suite
310350	I5300-C-UK-WF-SFID	BradyPrinter i5300 with Wifi - UK with Brady Workstation SFID Suite

## WiFi printers - 600 dpi

Article No.	Order Ref.	Description
151284	I5300-600C-EU-WF	BradyPrinter i5300 with Wifi - EU
310853	I5300-600WF-EU-LAB	BradyPrinter i5300 with Wifi - EU with Brady Workstation LAB Suite
310855	I5300-600WF-EUPWID	BradyPrinter i5300 with Wifi - EU with Brady Workstation PWID Suite
310857	I5300-600WF-EUSFID	BradyPrinter i5300 with Wifi - EU with Brady Workstation SFID Suite
151282	I5300-600C-NA-WF	BradyPrinter i5300 with Wifi - NA
310865	I5300-600WF-NA-LAB	BradyPrinter i5300 with Wifi - NA with Brady Workstation LAB Suite
310867	I5300-600WF-NAPWID	BradyPrinter i5300 with Wifi - NA with Brady Workstation PWID Suite
310869	I5300-600WF-NASFID	BradyPrinter i5300 with Wifi - NA with Brady Workstation SFID Suite
151286	I5300-600C-UK-WF	BradyPrinter i5300 with Wifi - UK
310859	I5300-600WF-UK-LAB	BradyPrinter i5300 with Wifi - UK with Brady Workstation LAB Suite
310861	I5300-600WF-UKPWID	BradyPrinter i5300 with Wifi - UK with Brady Workstation PWID Suite
310863	I5300-600WF-UKSFID	BradyPrinter i5300 with Wifi - UK with Brady Workstation SFID Suite

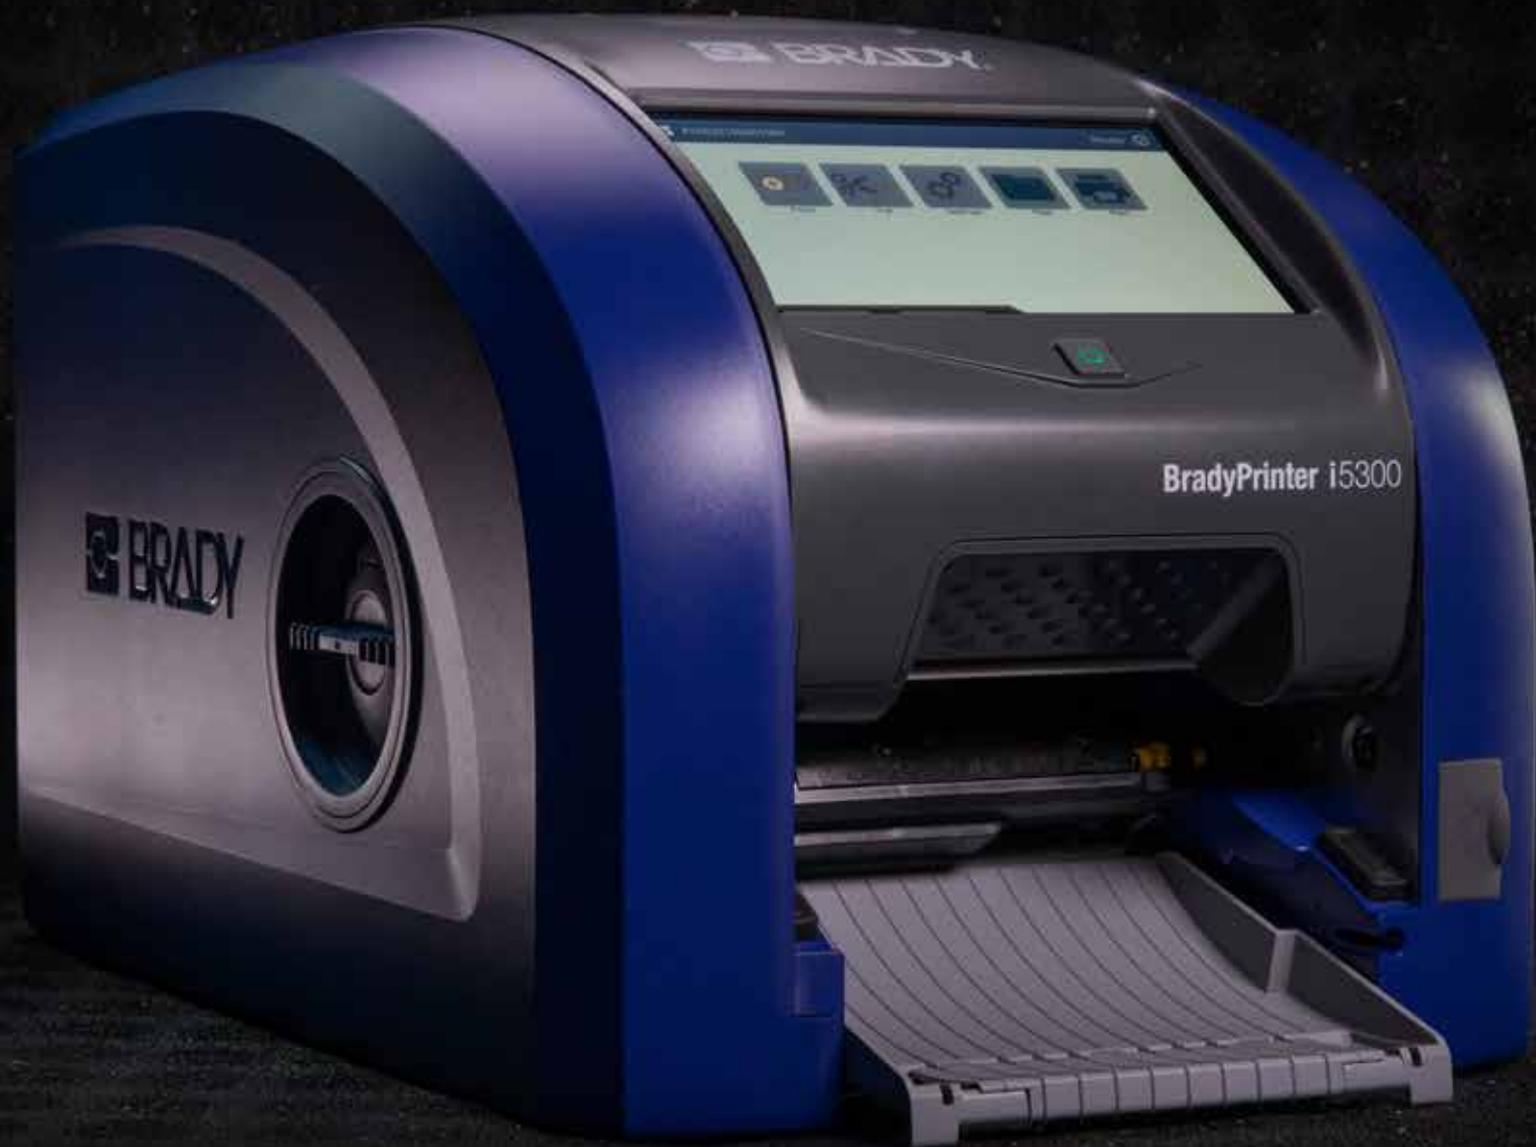

# Key features



## **No wasted labels – prints on the first one**

No calibration is required, so there are no wasted labels and no trial and error during setup.



## **i5300 - 20-second supply changeovers**

There are no sensor, heat or speed adjustments. Just drop, lock and print to reduce setup time.



## **300- and 600-dpi print-resolution models**

Prints small fonts with excellent precision and accuracy for electronics, product and laboratory identification.



### **1-click label part recognition and setup**

Software, printer and materials communicate to allow 1-click auto setup of labels.



### **Faster print speeds for all job sizes**

Get efficient, large-job printing with better performance and higher throughput.



### **Rugged construction for mid to high volumes**

Metal-frame construction and internal print engine are designed for high performance.

# **BradyPrinter i5300**

## **Industrial Label Printer**

# Easy. Inside and out.

When it comes to the BradyPrinter i5300 Industrial Label Printer, everything's easy. Taking just seconds to set up and load, it offers a faster, easier start-to-print process. That's because it's designed for efficiency — no setup, no adjustments and no waste. Zero. Enjoy time-saving features like a print queue and interrupt function. Plus, get precision printing on 1,300 parts. All this so you can reach your high-mix, high-volume printing goals. Ready? We told you it was going to be easy.

## Rugged design

Solid construction with metal framing and gearing for higher throughput and workhorse durability

## Built-in, programmable auto-cutter

Cuts off material after a job, after a label or not at all

## Big 7" color touchscreen

Large icons are user-friendly and allow for faster navigation

## Intuitive interface


Communicates installed part numbers, remaining supply, status, in-job navigation and label preview


## Smart media rolls

PrintSmart Technology pre-optimizes speed, heat, size and ribbon / material-pairing settings, eliminating trial and error and wasted materials

## Media guides and integrated sensors

Sensors automatically align when guides squeeze together — no adjustments, and no alignment trial and error

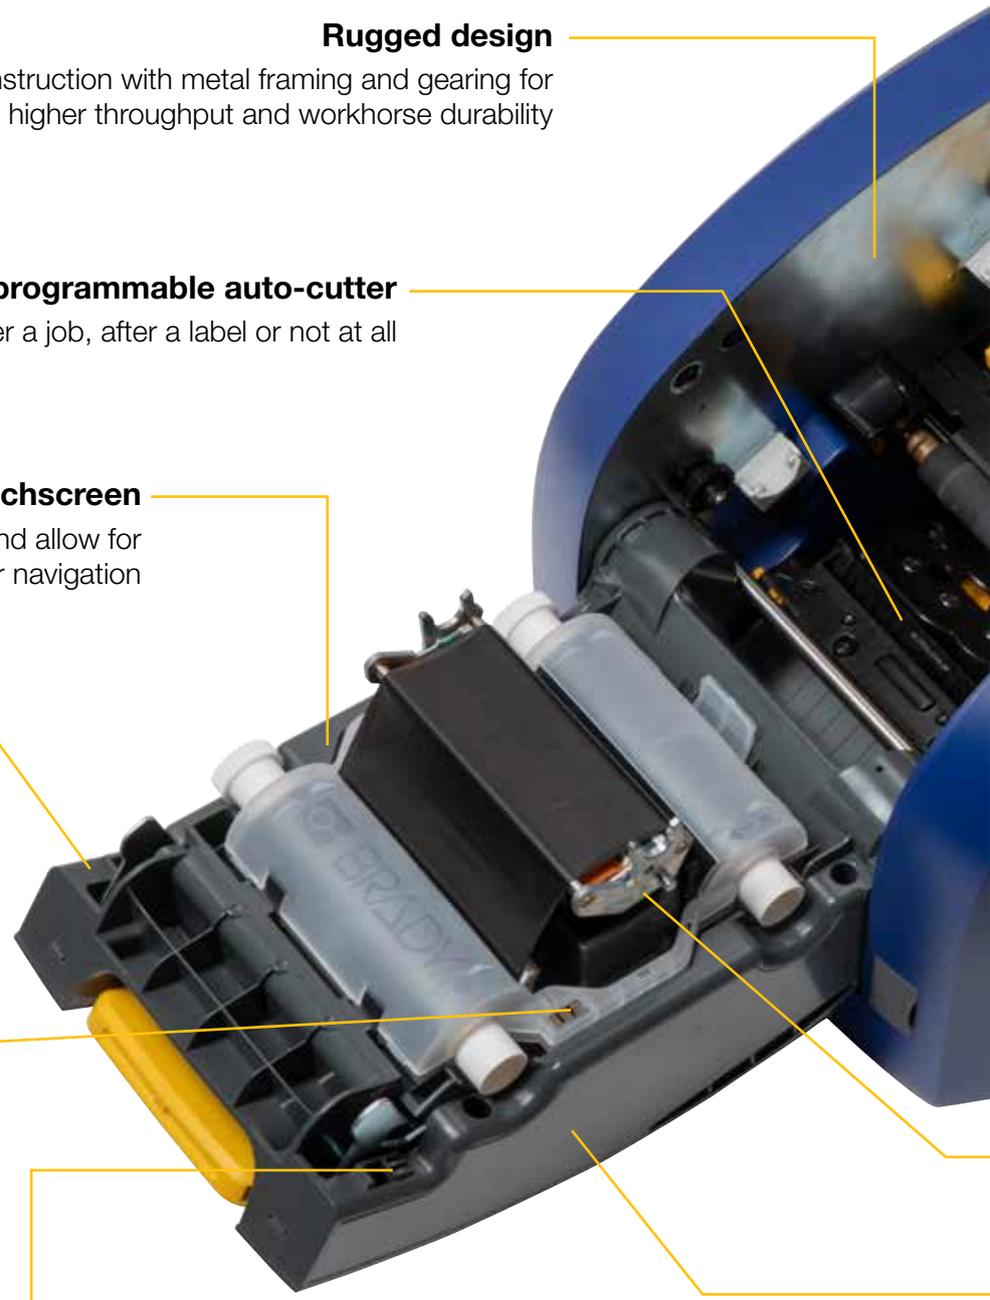

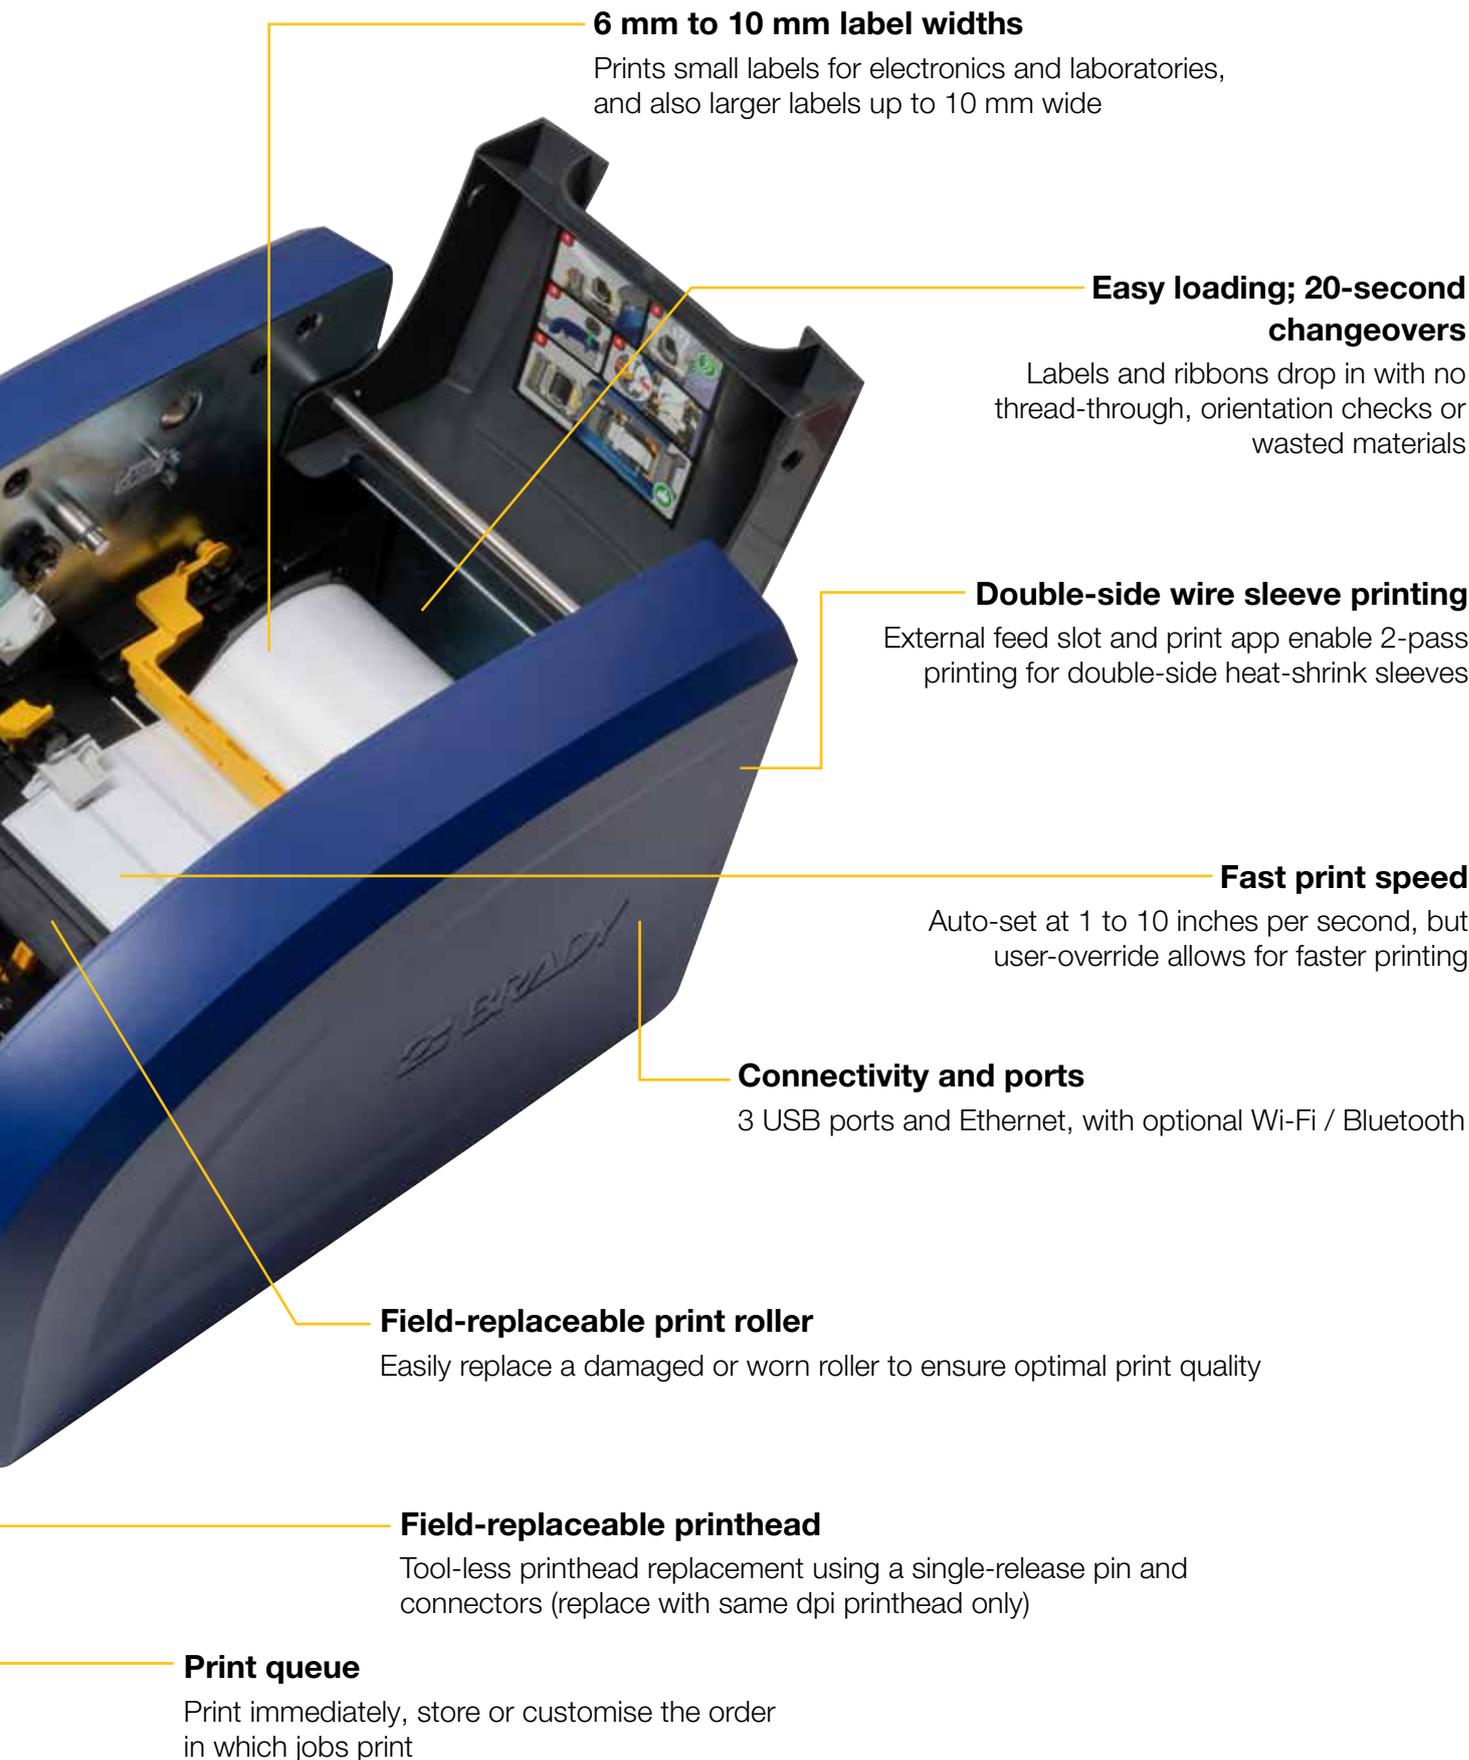

**6 mm to 10 mm label widths**

Prints small labels for electronics and laboratories, and also larger labels up to 10 mm wide

**Easy loading; 20-second changeovers**

Labels and ribbons drop in with no thread-through, orientation checks or wasted materials

**Double-side wire sleeve printing**

External feed slot and print app enable 2-pass printing for double-side heat-shrink sleeves

**Fast print speed**

Auto-set at 1 to 10 inches per second, but user-override allows for faster printing

**Connectivity and ports**

3 USB ports and Ethernet, with optional Wi-Fi / Bluetooth

**Field-replaceable print roller**

Easily replace a damaged or worn roller to ensure optimal print quality

**Field-replaceable printhead**

Tool-less printhead replacement using a single-release pin and connectors (replace with same dpi printhead only)


**Print queue**

Print immediately, store or customise the order in which jobs print

# Making it happen

If you need innovation, we're here. With easier and more efficient solutions, your business can move ahead, going from better to its very best. Whether this means working with printers, software, materials or automation, our eyes are on your performance.

At Brady, we have a deep commitment to making places safer and more secure. And, after more than a century of experience, we believe we have succeeded. Our solutions are flexible and easily customizable. They're also built with durability in mind to help you accomplish even more than you thought was possible. Looking to the future, as you strive for a better work experience, just know we're with you every step of the way.

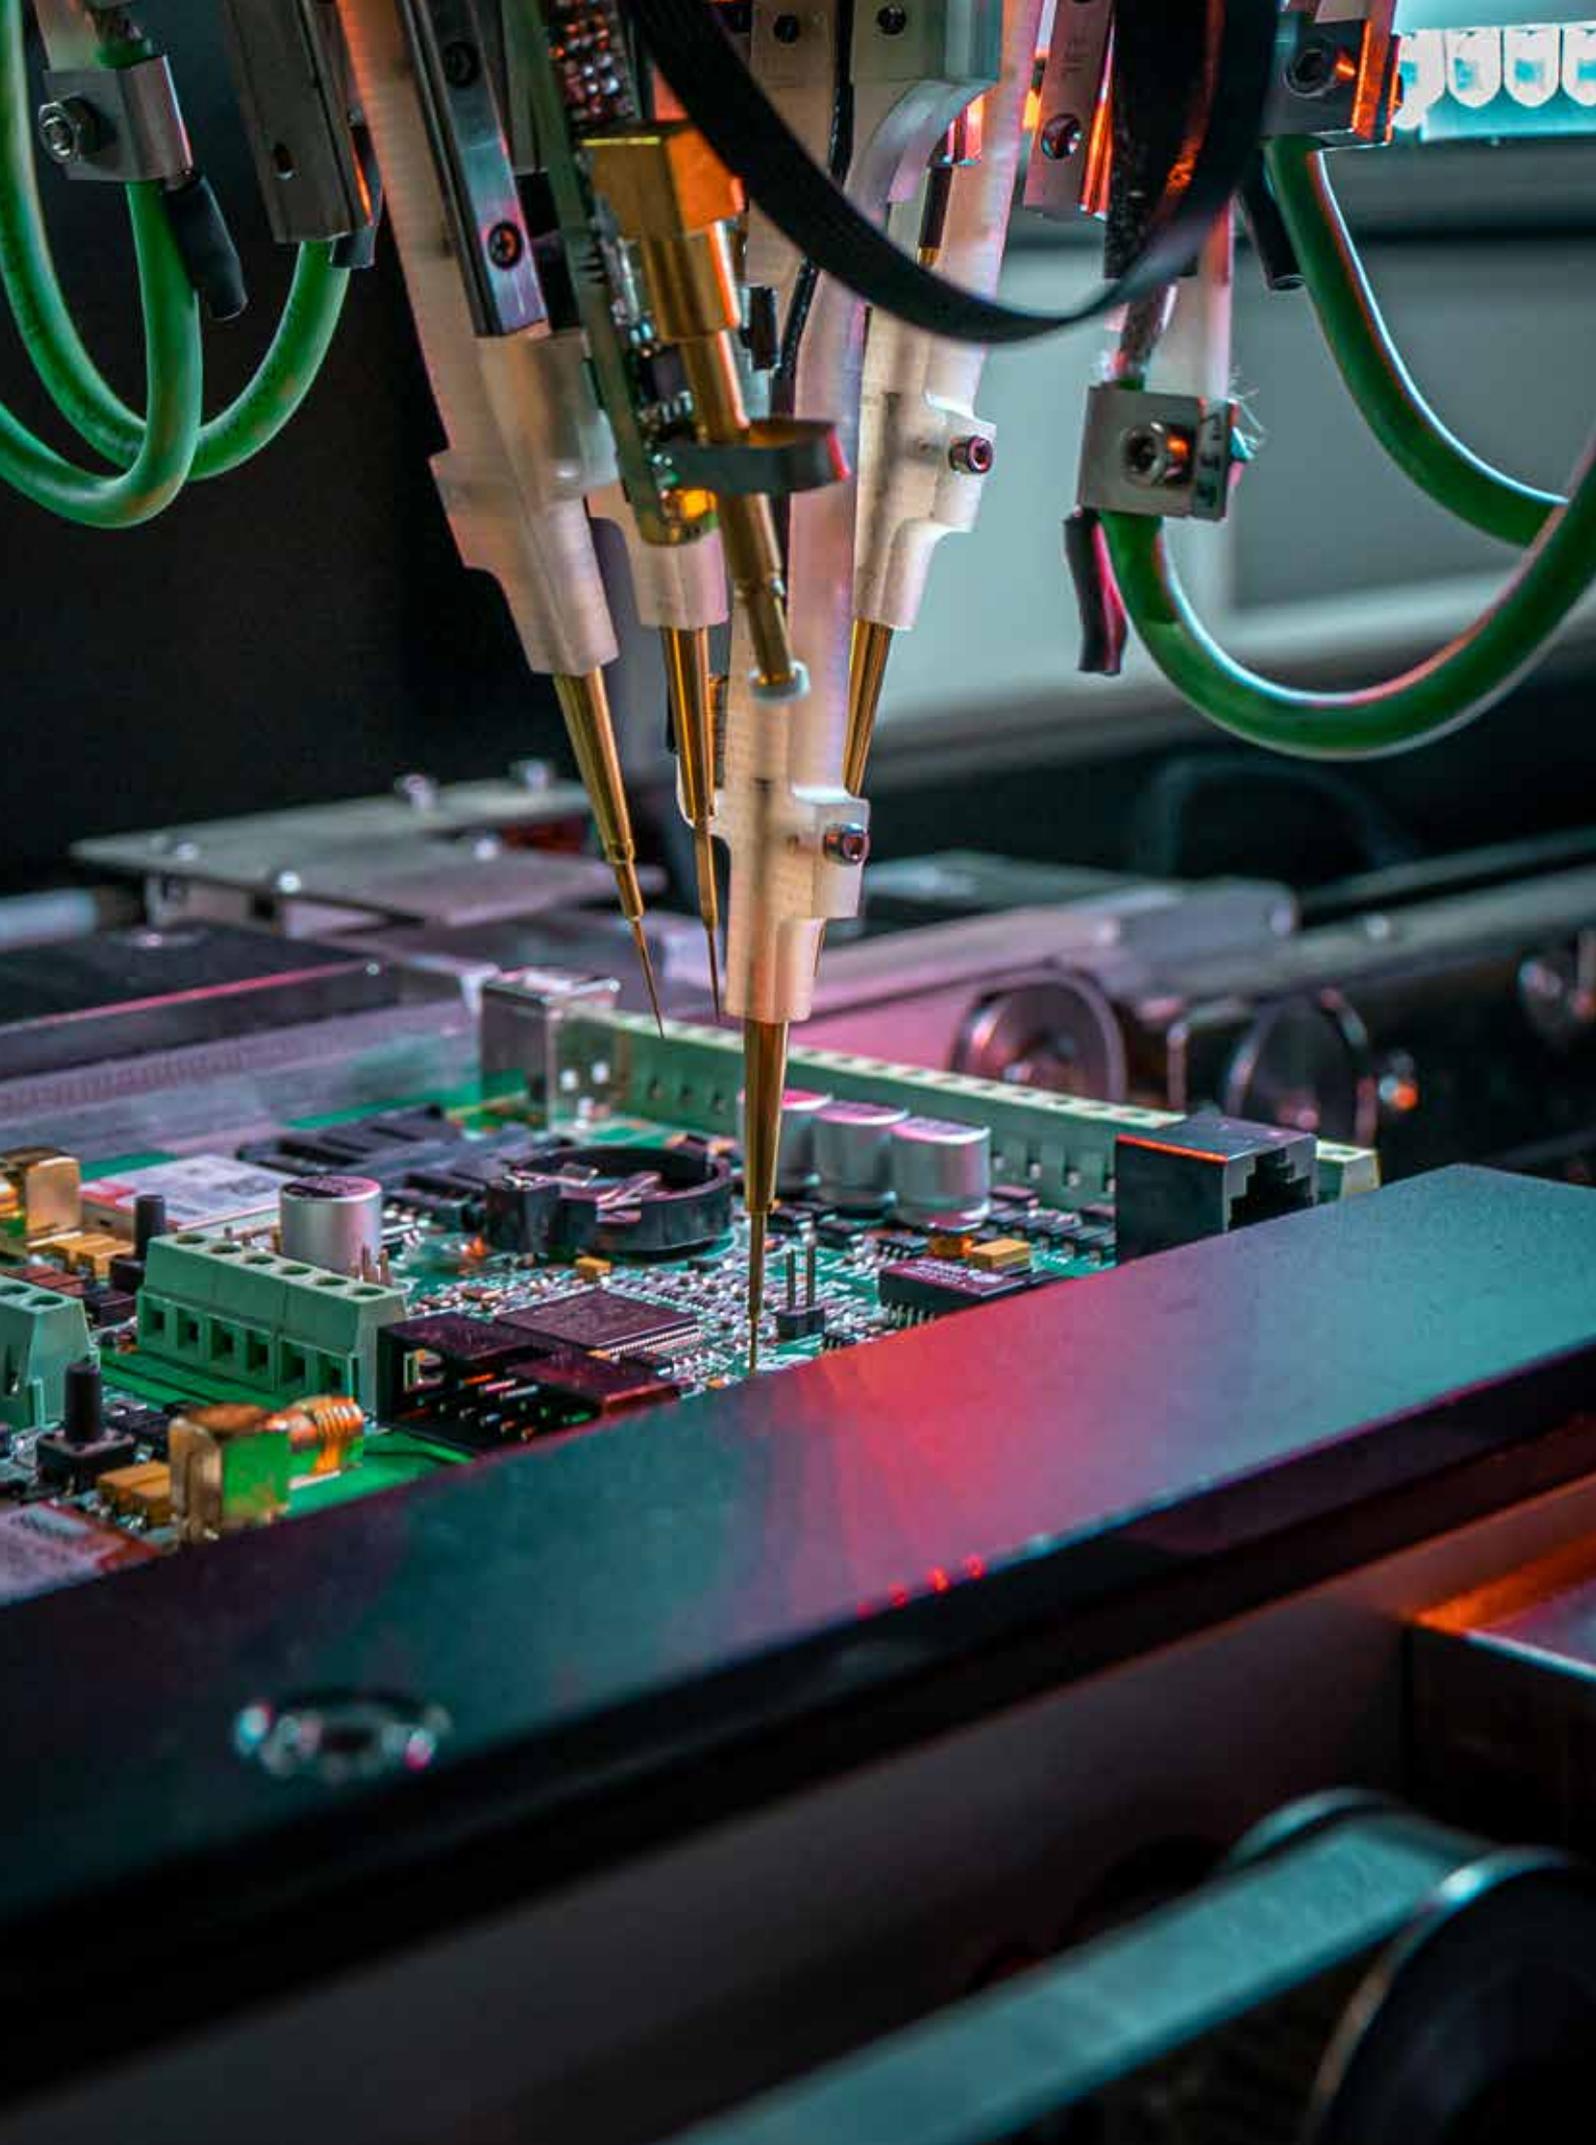



BradyPrinter i5300

Part Y33401  
Part Y33401



PERMASLEEVE 187




# Going the distance

At Brady, we go the distance to make sure you get what you need. Whether it's field work or lab work, we've got materials for every application.

Barcodes, images, small text — your most important information needs to stay put in any type of environment. From freezing temperatures to blistering heat, when used with solvents or in outer space, simply put, Brady materials are all about high performance. Our scientists make sure of it. Brady's R&D program focuses on solutions that bring durability, flexibility and efficiency to every workday.

We offer hundreds of labels, so be sure to browse through the entire collection. And, as always, let us know if you need more.

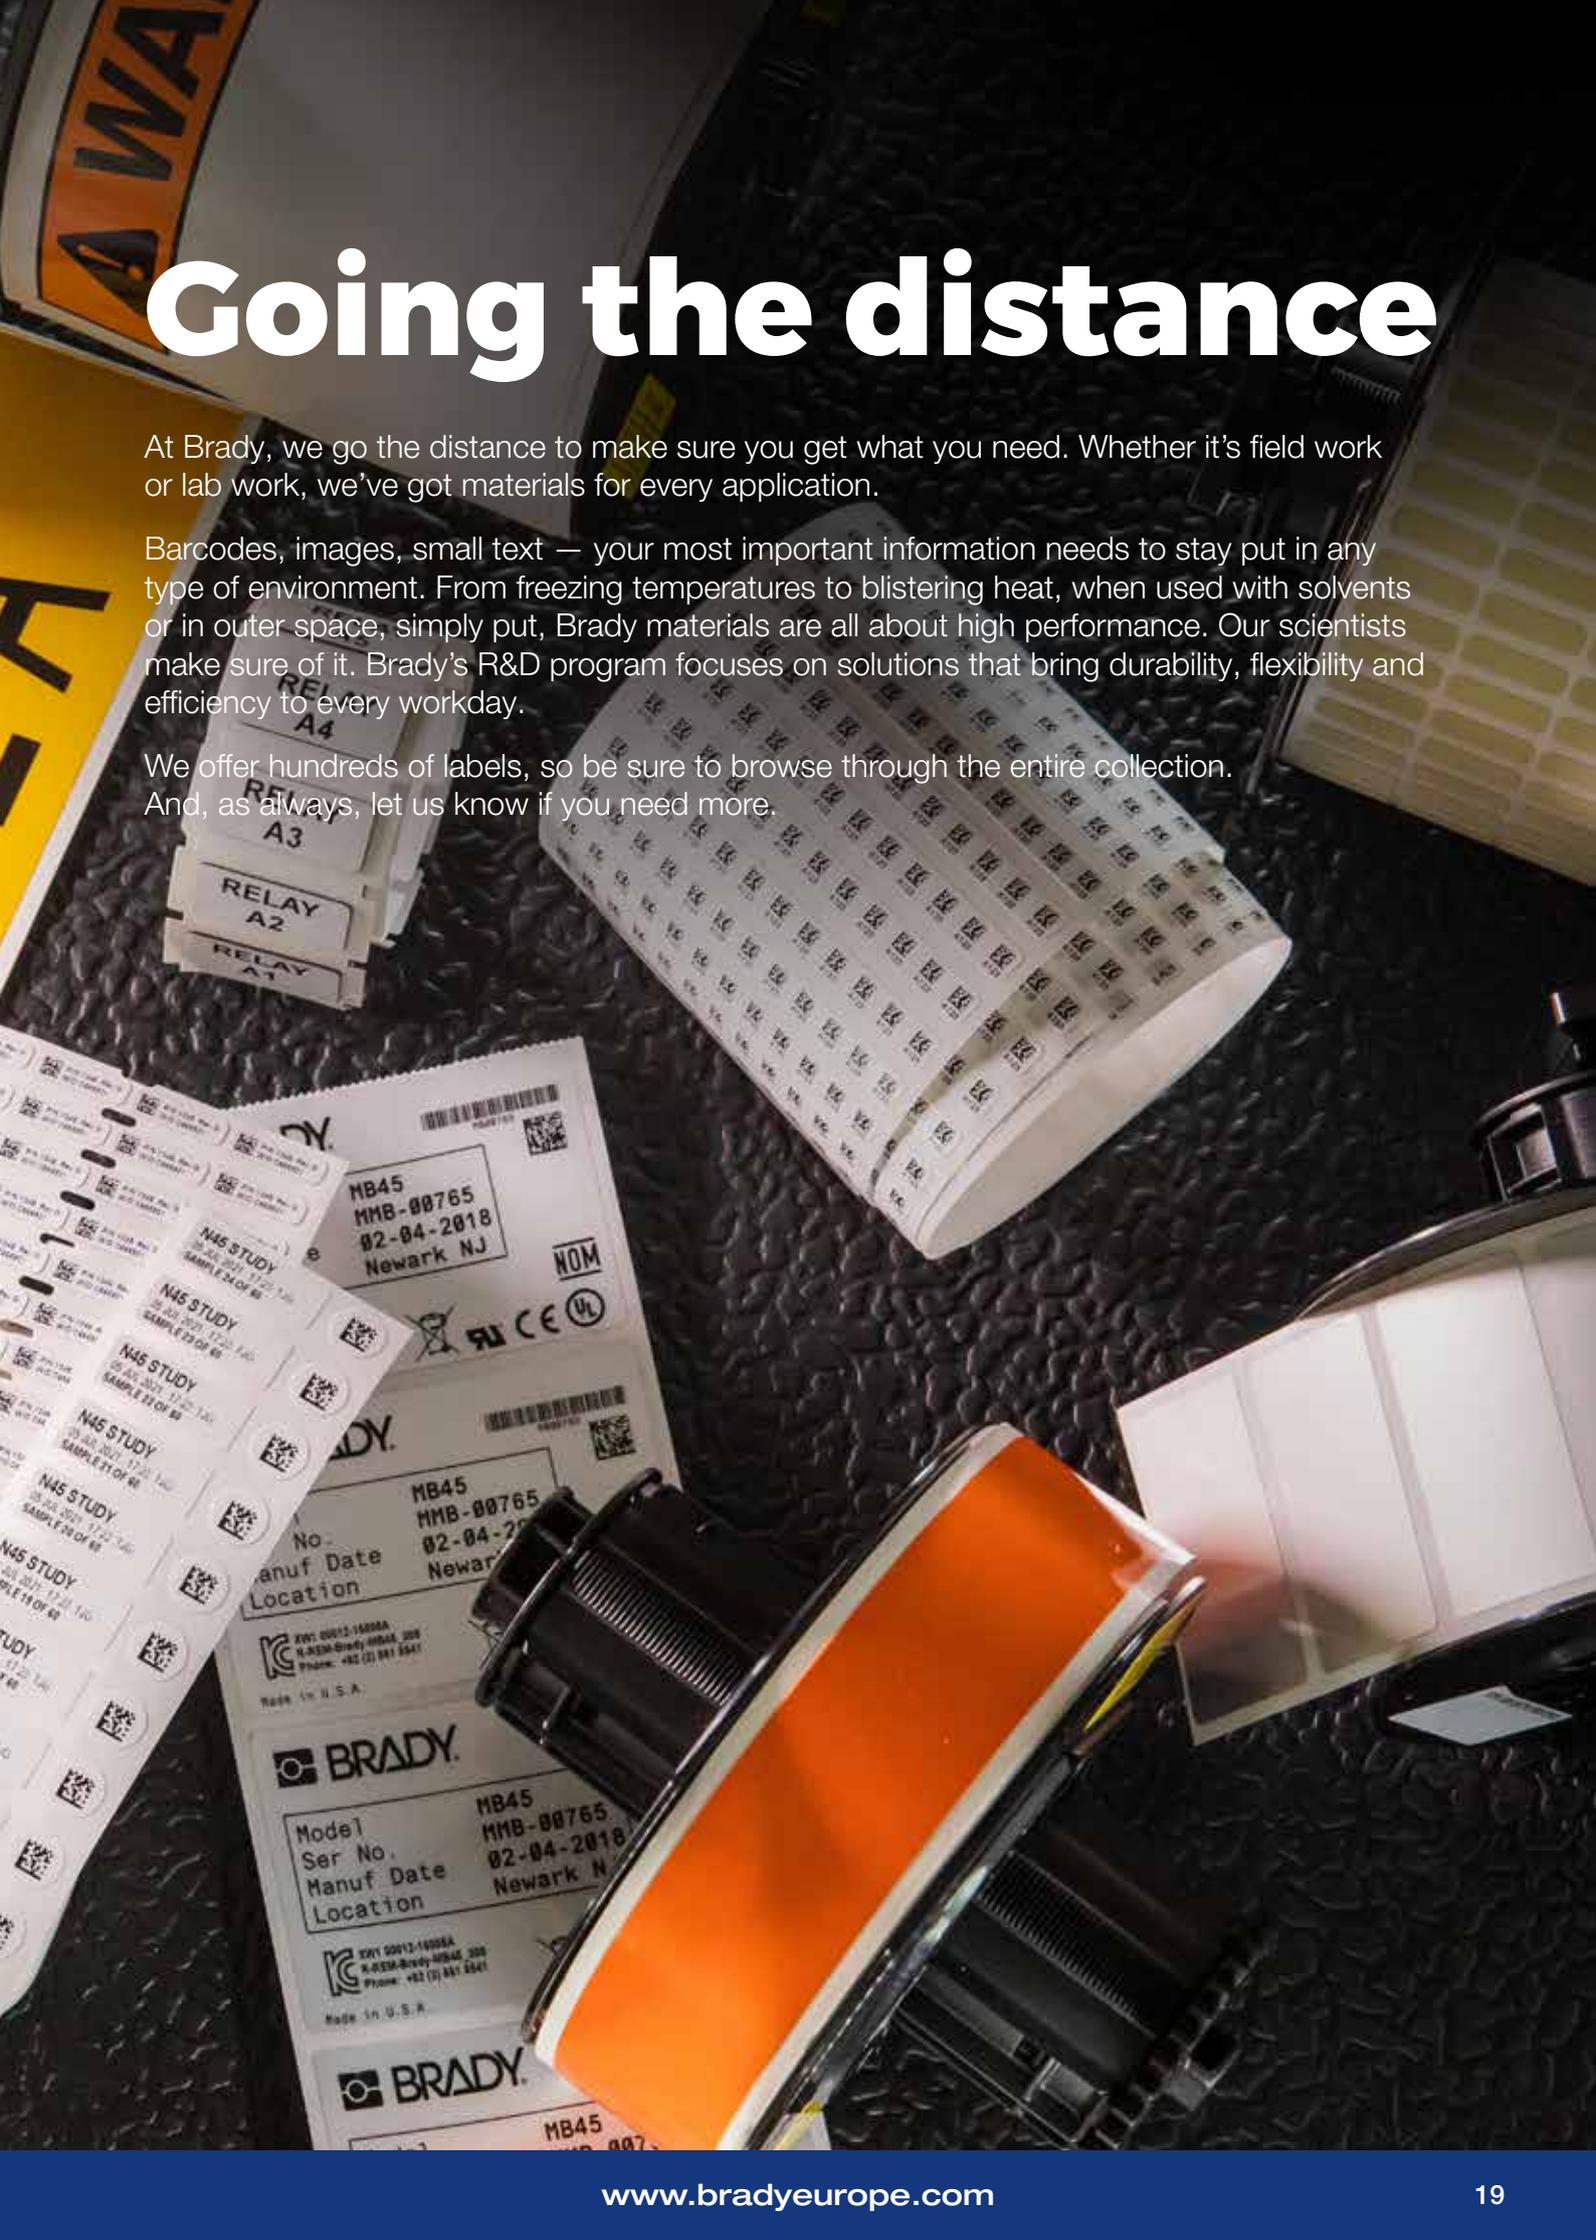

# Master material index

Need more information? View the technical data sheets Brady offers online access to technical data sheets for all Brady materials. View by a specific B-Number or search by relevant keywords. Visit [www.bradyeurope.com/tds](http://www.bradyeurope.com/tds) or click the QR code.

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-342	Heat-shrink Polyolefin Sleeve	Matt	White	-55 °C	130.6 °C	3:1 ratio heat shrinkable wire marking sleeve that fits snugly around wires for identification and protection. Fade-resistant and flame retardant. Also available in yellow and black.	UL Recognised to UL224; SAE-AMS-DTL-23053/5 C (Class 1); SAE-AS-81531
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve	Matt	White	-70 °C	130.6 °C	2:1 ratio heat shrinkable wire marking sleeve specifically designed for high temperature and low vacuum outgassing applications. These heat shrinkable wire marking sleeves are made from irradiated high temperature PVDF. Also available in black.	NASA SP-R-0022A Outgassing Performance; SAE-AMS-DTL-23053/18 (Class 2); SAE-AS-81531; MIL-STD-202G Method 215K
B-348	Polyolefin	Matt	White	-55 °C	135 °C	Mass Transit Tag complies with minimal smoke and halogen emission requirements of the most strict underground norms for mass transit vehicles. The tag is a practical solution for mass transit manufacturers to identify thick cables and cable bundles.	—
B-403	Paper	Matt	Black on White	-70 °C	100 °C	White dissolvable paper. Dissolves completely in water leaving no adhesive residue, ideal for temporary labelling applications	—
B-413	Metallic, Non-metal Polyester	Satin	Light Grey	-70 °C	110 °C	Thermal transfer printable polyester material with metallic-looking finish (non-metallised). Ideal for barcoded asset tracking and rating plate applications.	UL Recognised; cUL Recognised
B-417	Self-laminating Vinyl	Matt	White, Transparent	-40 °C	70 °C	Keep your wire identification secure with this self-laminating marker with extra-strong adhesive. The extra-strong adhesive makes these markers ideal for small-diameter wires. Features a white printable area and a clear tail that wraps around the marker.	UL Recognised to UL969 Labelling and Marking Standard when printed with the Brady Series R4300 and R7950 ribbons. See UL files MH62024 for specific details. Brady customers should specify at purchase if they require UL Recognised B-417 labels. Brady sells both UL Recognised B-417 labels and non-approved labels depending on customer requirements
B-422	Polyester	Gloss	White	-40 °C	100 °C	White material stock with glossy finish and 2 mils of adhesive for rough surface applications, including low surface energy plastics. Designed to withstand solvent exposure. UL rated for surfaces commonly used in solar panel manufacturing. Also used for component identification, barcoding, asset and inventory tracking.	UL Recognised; CSA Accepted
B-423	Polyester	Gloss	White	-70 °C	110 °C	White polyester thermal transfer printable material with a glossy finish. Widely used for component identification, barcoding, asset and inventory tracking. UL rated for surfaces commonly used in solar panel manufacturing.	UL Recognised; CSA Accepted; AGA Approved; Halogen Free (DIN VDE 0472/part 815)
B-424	Paper	Matt	White	-40 °C	50 °C	White paper material with matt finish and smooth top coat finish for thermal transfer printing. Good contrast and smear resistance for thermal barcode printing. Used for general purpose labeling applications	—
B-425A	Polypropylene	Matt	White	-70 °C	80 °C	White polypropylene material stock with matt finish for thermal transfer printing or write-on applications. Excellent solvent resistance and print performance; not recommended for long-term outdoor use.	UL Recognised; CSA Accepted; Halogen Free (DIN VDE 0472/part 815)
B-427	Self-laminating Vinyl	Matt	White, Transparent	-40 °C	60 °C	Thermal transfer printable, self-laminating material. These labels have a printable area with a clear "tail" that wraps around the marker. The "tail" serves as overlamine to protect the print. Superior resistance to abrasion, solvents, water, oil and dirt. Also available in grey, brown, green, yellow, blue, red, purple, orange.	UL Recognised to UL969 Labelling and Marking Standard when printed with the Brady Series R4300 and R6200 ribbons. See UL files MH17154 for specific details. Brady customers should specify at purchase if they require UL Recognised B-427 labels. Brady sells both UL Recognised B-427 labels and non-approved labels depending on customer requirements.

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-428	Metallised Polyester	Matt	Light Grey	-70 °C	120 °C	Thermal transfer printable metallised polyester with matt finish. Withstands solvents and variable temperatures. Excellent for serial and rating plate applications with name-plate quality and a metal-looking finish.	UL Recognised; CSA Accepted; Halogen Free (DIN VDE 0472/part 815)
B-428/ B-966B	Metallised Polyester with Polyester Overlamine	Gloss	Silver	-70 °C	120 °C	A Metallised polyester label that comes with a separate overlamine to be applied over the label once printed. This way the label remains clear and easy-to-read, even in harsh environments. Overlamine is a clear polyester (B-966B) that extends outside of label on each side when applied.	–
B-430	Polyester	Gloss	Transparent	-70 °C	100 °C	Translucent, high performance polyester material with a glossy finish. Thermal transfer printable.	UL Recognised; CSA Accepted
B-432	Polyester	Gloss	Transparent	-40 °C	100 °C	Translucent, high performance polyester material with a glossy finish. Thermal transfer printable. Very similar to B-430, but has a thicker layer of acrylic adhesive for better adherence to rough surface applications.	UL Recognised; CSA Accepted
B-434A	Metallised Polyester	Gloss	Silver	-40 °C	90 °C	Metallised polyester with a glossy finish and a thicker layer of adhesive for better adherence to rough surface applications. Withstands numerous solvents while maintaining excellent image quality.	UL Recognised; CSA Accepted
B-435A	Metallised Polyester	Gloss	Silver	-40 °C	90 °C	Printable metallised polyester withstands numerous solvents and variable temperatures. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish.	UL Recognised; CSA Accepted
B-437	Polyvinylfluoride	Matt	White	-70 °C	135 °C	Polyvinylfluoride label material with matt finish. Used in wire and cable identification applications where self-extinguishing features are required. This label material utilises an adhesive for heavy-duty applications and is available in continuous or die-cut formats. Excellent resistance to water, oil and other common fluids. Also available in yellow.	MIL-M-87958 Pressure Sensitive Adhesive Wire or Cable Marker and Identification specification
B-438	Tamper-evident Metallised Polyester	Matt	Silver	-40 °C	40 °C	Metallised polyester material with matt finish. Leaves a checkerboard footprint on the surface when removed; the pattern also appears on the top of the label to prevent it from being reused.	UL Recognised
B-461	Self-laminating Polyester	Matt	White, Transparent	-196 °C	110 °C	Permanent adhesive; suitable for liquid nitrogen application if material is wrapped around itself, as in self-lamination; write-on capabilities. Temperature range increases to 121°C when used in autoclave process	–
B-472	Polyimide	Matt	White	-70 °C	100 °C	Cable and wire bundle applications and label applications where self-extinguishing properties are required	–
B-480A	Metallic, Non-metal Polyester	Satin	Silver	-70 °C	110 °C		UL Recognised; cUL Recognised
B-481	StainerBondz™ Polyester	Matt	White	-80 °C	130 °C	White polyester will remain resistant when exposed to xylene and other chemicals that are commonly used in the slide staining process	–
B-483A	Polyester	Gloss	White	-40 °C	120 °C	White polyester thermal transfer printable material with glossy finish and aggressive adhesive specifically designed for powder coated surfaces.	UL Recognised; CSA Accepted
B-484A	Polyester	Gloss	White	-40 °C	120 °C	White polyester thermal transfer printable material, similar to B-483, but with thinner construction for curved or angled surfaces. Offers aggressive adhesive for adhesion to textured metals and low surface energy plastics.	UL Recognised
B-486B	Metallised Polyester	Matt	Light Grey	-40 °C	120 °C	Thermal transfer printable metallised polyester material. Designed for high adhesion to textured metals, powder coated surfaces and low surface energy plastics.	UL Recognised; CSA Accepted
B-488	Polyester	Matt	White	-40 °C	145 °C	White polyester thermal transfer printable material, similar to B-423, but with matt finish. Widely used for component identification, barcoding, asset and inventory tracking.	UL Recognised; CSA Accepted

# Master material index

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-489A	Polyester	Matt	White	-40 °C	120 °C	White polyester thermal transfer printable material, similar to B-483, but with matt finish. Aggressive adhesive specifically designed for powder coated surfaces.	UL Recognised; CSA Accepted
B-490	FreezerBondz™ Polyester	Matt	White	-196 °C	130 °C	Can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen, except for Vial Tops. Material must slightly overlap itself.	–
B-492	FreezerBondz™ Polyester	Matt	White	-196 °C	110 °C	Ultra thin; can label frosted/frozen (with overlap) or room temperature labels and lasts in liquid nitrogen and hot water baths	–
B-498	Vinyl Cloth	Semi-gloss	White	-40 °C	80 °C	White vinyl cloth label material with glossy finish. The adhesive and cloth backing give excellent holding power, while being repositionable and removing cleanly.	UL Recognised
B-499	Nylon Cloth	Matt	Black on White	-40 °C	90 °C	Nylon cloth material with matt finish. The adhesive allows labelling in environments with heat, cold, oil and dirt. Also available in yellow.	UL Recognised; CSA Accepted; Halogen Free (DIN VDE 0472/part 815) Approvals are for White material only
B-509	Magnetic Polyester	Matt	White	-18 °C	70 °C	Magnetic Back Polyester is used for temporary, reusable and movable signs	–
B-526	Phosphorescent Polyester	Gloss	Photolum. Green	-40 °C	60 °C	BradyGlo™ High Intensity laminate is designed to provide high adhesion and luminance for egress marking in low light areas in and along stairwells of public buildings, exit and directional signs, identification of fire alarms and extinguishers, low location egress pathway markings, and directional systems for escape or evacuation routes.	New York Local Law 26 RS 6-1 & 6-1A; City of New York, Department of Buildings MEA No. 467-06-M UV: 46-9-7
B-549	Polyester	Gloss	White	-40 °C	100 °C	Flexible, dimensionally stable, low temperature, pressure sensitive adhesive tape for permanent application. Adhesive can be applied at temperatures down to -10°F (-23°C).	–
B-551	Polyester Tag	Matt	White	-40 °C	89 °C	Tag material used for marking on-the-spot warning of dangerous conditions	Complies to OSHA 1910.145(f) when printed with required signal word and major message.
B-565	Metallised Polyester	Matt	Silver	-40 °C	110 °C	Designed for applications like identification labels or rating and serial plates that utilise barcodes, alphanumerics, graphic symbols and logos and require nameplate-like quality	–
B-569	Polyester	Gloss	Green	-40 °C	100 °C	Designed for use on stainless steel pipes in harsh environments such as the Pulp and Paper Industry	–
B-581	Vinyl	Gloss	White	-40 °C	82 °C	Only indoor use, where frequent repositioning is required	–
B-584	Reflective Tape	Gloss	Orange	-40 °C	70 °C	Suitable for outdoor use. Also available in silver and yellow.	–
B-593	Polyester	Gloss	White	-20 °C	100 °C	EPREP (Engraved Panel REPLacement labels) are designed for patch panel identification in identifying external push-buttons, switches and internal connection points. Also available in black, green, red, silver and yellow.	UL Recognised; cUL Recognised
B-595	Vinyl	Gloss	White	-40 °C	82 °C	Durable, low-shrink vinyl with our most aggressive adhesive. Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces). Adheres to "difficult" low-surface energy items (PVC piping, blow-moulded equipment cases, ABS plastics, recycled plastics). Available in a wide range of colours.	BS5609:1986 Section 2 and section 3
B-717	Polyimide	Gloss	White	-70 °C	300 °C	White polyimide material with glossy finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals. Surface resistivity values in the recommended range for dissipative ESD packing materials.	UL Recognised; Meets the requirements of ANSI/ESD S541-2008 (between 10 <sup>4</sup> and 10 <sup>11</sup> ohms) for dissipative ESD packaging materials; Meets the performance requirements of MIL-STD-202G, Method 215K

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-718	Polyimide	Gloss	White	-70 °C	300 °C	White polyimide material, low profile (1 mil thickness), with glossy finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals. Surface resistivity values in the recommended range for dissipative ESD packing materials.	UL Recognised; Meets the requirements of ANSI/ESD S541-2008 (between 10 <sup>4</sup> and 10 <sup>11</sup> ohms) for dissipative ESD packaging materials; Meets the performance requirements of MIL-STD-202G, Method 215K
B-719	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals. Surface resistivity values in the recommended range for dissipative ESD packing materials.	UL Recognised; Meets the requirements of ANSI/ESD S541-2008 (between 10 <sup>4</sup> and 10 <sup>11</sup> ohms) for dissipative ESD packaging materials; Meets the performance requirements of MIL-STD-202G, Method 215K
B-724	Polyimide	Matt	Amber	-70 °C	300 °C	Amber polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	Meets the performance requirements of MIL -STD-202G, Notice 12, Method 215K; Meets the requirements of SAE AS81531 Marking of Electrical Insulating Material
B-727	Polyimide	Gloss	White	-70 °C	300 °C	White polyimide material with glossy finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised; Meets the performance requirements of MIL -STD-202G, Notice 12, Method 215K; Dibutyltin and Dioctyltin free.
B-728	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised; Meets the performance requirements of MIL -STD-202G, Notice 12, Method 215K
B-729	Polyimide	Matt	White	-70 °C	300 °C	White polyimide material, low profile (1 mil thickness), with matt finish and ultra-durable adhesive. Used in printed circuit board and electronic component pre-process labelling. Designed for use with extreme wash protocol and cleaning chemicals.	UL Recognised; Meets the performance requirements of MIL -STD-202G, Notice 12, Method 215K
B-7425	Polypropylene	Matt	Black on White	-80 °C	70 °C	White Polypropylene material. Ideal for laboratory identification such as vials, centrifuge tubes and test tubes. For freezer or liquid nitrogen applications, B-7425 must be applied prior to being frozen.	–
B-7563	Metallised Polyester	Satin	Silver	-40 °C	135 °C	Thermal transfer printable metallised polyester withstands numerous solvents and variable temperatures. Ideal for serial and rating plate applications with name-plate quality and a metal looking finish.	UL Recognised
B-7569	Vinyl	Gloss	White	-20 °C	75 °C	Used for Pipe Markers, Arrow Tape, Warehouse Marking, Floor Marking, Warning Panels, Safety Signs and Hazardous Substance Identification. Available in a wide range of colours.	BS5609:1986 Section 2 and section 3
B-7597	Polyethylene Tag	Matt	White	-40 °C	100 °C	Polyethylene tag material. Resists tearing and the topcoat resists smudging and abrasion. Halogen free material.	Halogen Free (DIN VDE 0472/part 815)
B-7598	Polyester Tag	Gloss	White, Yellow, Red, Green, Silver, Black, Blue	-40 °C	100 °C	A general identification polyester tag for cables exposed to extreme conditions. Up to 10 years outdoor durability. Also available in black, blue, green, red, silver and yellow.	Parts supplied in White, Black or Silver are Halogen Free as per IEC 61249-2-21 (2003-11)
B-7599	Polyethylene Tag	Matt	Yellow	-40 °C	50 °C	White polyethylene tag material. Rapido™ Wiremarking Sleeves are fast and easy to apply. Simply squeeze the edges of the material together, thread your wire through the holes and pull away the wire to release the marker.	–
B-7641	Heat-shrink Polyolefin Sleeve	Matt	White	-55 °C	105 °C	2:1 ratio heat shrinkable, zero halogen wire marking sleeves. The wire marking sleeves offer outstanding fire safety properties and minimal smoke emission. Also available in yellow.	BS-6853 (1999) Vehicle Category 1A; EN-45545-2, requirement 24, Vehicle Category HL3; Zero Halogen

# Master material index

Brady Material No.	Material	Finish	Colour	Temp (°C) (Tested for 30 days)		Properties & Applications	Approval/Compliance
				Min.	Max.		
B-7642	Heat-shrink Polyolefin Sleeve	Matt	White	-40 °C	120 °C	2:1 ratio heat shrinkable wire marking sleeves. The sleeves are high-temperature rated, highly flame retardant, and very flexible.	UL 224; SAE-AMS-DTL-23053/5 (Class 1 and 3); SAE-AS-81531; MIL-STD-202 method 215K; Tested per ASTM E162; ASTM E662
B-7643	Thermoplastic Polyether Polyurethane	Matt	White, Yellow	-40 °C	90 °C	Thermal transfer and dot matrix printable wire and cable bundle tag for harsh environments. Low halogen material. Also available in black, orange, red and yellow.	Halogen free per IEC 61249-2-21 (2003-11), Adherence: SAE-AS81531-1998, Flame retardant: MIL-STD-202G
B-7696	Vinyl Tag	Gloss	White, Yellow	-40 °C	70 °C	Brady DuraSleeve® printable inserts create a durable legend. The rigid construction of the DuraSleeve wire marking system provides inserts that can easily be inserted into a clean carrier. The legend can be changed before or after termination. Also available in yellow.	UL94 V0
B-777	Polyimide	Gloss	White	-70 °C	300 °C	The B-777 Ultratemp label for harsh washing processes works seamlessly with the BSP™61 Print and Apply System, the ALF Label Feeder and other auto-apply systems. Together they provide a reliable and flexible on-site traceability solution for high heat applications in manufacturing.	UL Recognised to UL969 Labelling and Marking Standard when printed with Brady Series R6300 ribbon. See UL file MH25991 for specific details.
B-8423	Polyester	Satin	White	-70 °C	110 °C	Polyester material with satin finish, economical alternative to B-423. Used for component identification, barcoding, asset and inventory tracking. Also available in yellow.	UL Recognised; CSA Accepted
B-854	Metal Detectable Polyester	Matt	White	-40 °C	110 °C	Tough against harsh washdown environments; metal detectable. Also available in yellow.	—
B-855	Polyester	Matt	White	-40 °C	110 °C	Tough against harsh washdown environments. Also available in yellow.	—
B-8591	Polymer	Gloss	White	-70 °C	110 °C	B-8591 toughest outdoor label is suited for smooth, textured/rough or Highly Textured/Low energy surfaces.	—

▶ Need more information? View the technical data sheets Brady offers online access to technical data sheets for all Brady materials. View by a specific B-Number or search by relevant keywords. Visit [www.bradyeurope.com/tds](http://www.bradyeurope.com/tds) or click the QR code.






## Polyester labels

For general purpose industrial identification applications

- Widely used for PC board component identification, bin and shelf labels, barcoding and asset tracking
- 3 levels of adhesive strength



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-422: Polyester</b>								
●	B33-149-422	White	12.70	12.70	-	15.24	5000	B30 Monocolour Series
●	B33-5-422	White	25.40	12.70	-	15.24	5000	B30 Monocolour Series
▲	B33-102-422	White	38.10	9.53	-	12.70	2500	B30 Monocolour Series
●	B33-147-422	White	38.10	9.53	-	12.70	2500	B30 Monocolour Series
▲	B33-136-422	White	38.10	19.05	-	22.23	1500	B30 Monocolour Series
▲	B33-17-422	White	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-18-422	White	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-19-422	White	76.20	50.80	-	53.98	500	B30 Monocolour Series
▲	B33-76-422	White	101.60	76.20	-	79.38	500	B30 Monocolour Series
◎	B33C-312-422	White	7.92	-	25.91	-	1	B30-R6000HF
◎	B33C-375-422	White	9.53	-	25.91	-	1	B30-R6000HF
<b>B-423: Polyester</b>								
●	B33-11-423	White	6.35	6.35	-	9.53	15000	B30 Monocolour Series
●	B33-38-423	White	9.53	9.53	-	12.07	5000	B30 Monocolour Series
●	B33-340-423	White	9.53	9.53	-	12.07	10000	B30 Monocolour Series
●	B33-149-423	White	12.70	12.70	-	15.24	5000	B30 Monocolour Series
●	B33-1-423	White	19.05	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-46-423	White	19.05	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-49-423	White	22.86	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-103-423	White	25.40	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-3-423	White	25.40	9.53	-	12.07	5000	B30 Monocolour Series
●	B33-5-423	White	25.40	12.70	-	15.24	5000	B30 Monocolour Series
●	B33-29-423	White	31.75	9.53	-	12.07	5000	B30 Monocolour Series
▲	B33-43-423	White	31.75	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-45-423	White	38.10	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-72-423	White	44.45	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-53-423	White	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-17-423	White	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-19-423	White	76.20	50.80	-	53.98	500	B30 Monocolour Series
▲	B33-18-423	White	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-20-423	White	76.20	127.00	-	130.18	350	B30 Monocolour Series
▲	B33-55-423	White	101.60	50.80	-	53.98	750	B30 Monocolour Series
▲	B33-76-423	White	101.60	76.20	-	79.38	500	B30 Monocolour Series
▲	B33-161-423	White	101.60	101.60	-	104.78	450	B30 Monocolour Series
▲	B33-25-423	White	101.60	152.40	-	155.58	300	B30 Monocolour Series
◎	B30C-4000-423	White	101.00	-	45.70	-	1	B30-R6000HF
<b>B-430: Polyester</b>								
●	B33-5-430	Transparent	25.40	12.70	-	15.24	5000	B30 Monocolour Series
▲	B33-17-430	Transparent	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-18-430	Transparent	76.20	25.40	-	28.58	1500	B30 Monocolour Series
<b>B-432: Polyester</b>								
●	B33-149-432	Transparent	12.70	12.70	-	15.24	5000	B30 Monocolour Series
▲	B33-17-432	Transparent	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-18-432	Transparent	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-19-432	Transparent	76.20	50.80	-	53.98	500	B30 Monocolour Series
◎	B30C-4000-432	Transparent	101.00	-	36.60	-	1	B30-R6000HF



>>

## Polyester labels (Continued)

For general purpose industrial identification applications






Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-483A: Polyester</b>								
◆	B33-149-483	White	12.70	12.70	-	15.24	5000	B30 Monocolour Series
◆	B33-5-483	White	25.40	12.70	-	15.24	5000	B30 Monocolour Series
▲	B33-17-483	White	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-7-483	White	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-19-483	White	76.20	50.80	-	53.98	500	B30 Monocolour Series
▲	B33-18-483	White	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-55-483	White	101.60	50.80	-	53.98	750	B30 Monocolour Series
▲	B33-76-483	White	101.60	76.20	-	79.38	500	B30 Monocolour Series
◎	B30C-4000-483	White	101.00	-	39.60	-	1	B30-R6000HF
<b>B-484A: Polyester</b>								
▲	B33-125-484	White	22.86	12.70	-	15.24	1500	B30 Monocolour Series
◆	B33-5-484	White	25.40	12.70	-	15.24	5000	B30 Monocolour Series
▲	B33-136-484	White	38.10	19.05	-	22.23	1500	B30 Monocolour Series
▲	B33-17-484	White	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-18-484	White	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-19-484	White	76.20	50.80	-	53.98	500	B30 Monocolour Series
◎	B30C-4000-484	White	101.00	-	45.70	-	1	B30-R6000HF
<b>B-488: Polyester</b>								
◎	B30C-4000-488	White	101.00	-	39.60	-	1	B30-R4300
<b>B-489A: Polyester</b>								
◆	B33-5-489	White	25.40	12.70	-	15.24	5000	B30 Monocolour Series
▲	B33-17-489	White	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-19-489	White	76.20	50.80	-	53.98	500	B30 Monocolour Series
▲	B33-18-489	White	76.20	25.40	-	28.58	1500	B30 Monocolour Series
◎	B30C-4000-489	White	101.00	-	39.60	-	1	B30-R4300
<b>B-8423: Polyester</b>								
◆	B33-12-8423	White	12.70	11.10	-	14.13	2500	B30-R6000HF
◆	B33-101-8423	White	19.05	6.35	-	9.40	2500	B30-R6000HF
◆	B33-G2-8423YL	Yellow	20.00	7.95	-	15.00	5000	B30-R6000HF
◆	B33-13-8423	White	31.75	6.35	-	9.35	2500	B30-R6000HF
◆	B33-104-8423	White	38.10	6.35	-	9.33	2500	B30-R6000HF
◆	B33-600-8423	White	38.10	19.05	-	22.05	2500	B30-R6000HF
<b>B-8591: Polyester</b>								
▲	B33-53-8591-BK	Black	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-53-8591-SL	Silver	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-53-8591-WT	White	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-53-8591-YL	Yellow	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-7-8591-BK	Black	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-7-8591-SL	Silver	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-7-8591-WT	White	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-7-8591-YL	Yellow	69.85	31.75	-	34.93	1000	B30 Monocolour Series

## Metallised polyester labels

For product labelling, asset tracking and general industrial identification

- Silver metallic label withstands solvents and variable temperatures
- Ideal for serial number plates and rating plates with nameplate quality and metal looking finish






Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-413: Metallic, Non-metal Polyester</b>								
●	B33-5-413	Silver	25.40	12.70	-	15.24	7000	B30 Monocolour Series
●	B33-37-413	Silver	38.10	12.70	-	15.24	5000	B30 Monocolour Series
●	B33-6-413	Silver	38.10	19.05	-	22.23	3300	B30 Monocolour Series
▲	B33-17-413	Silver	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-53-413	Silver	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-7-413	Silver	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-18-413	Silver	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-19-413	Silver	76.20	50.80	-	53.98	700	B30 Monocolour Series
▲	B33-55-413	Silver	101.60	50.80	-	53.98	750	B30 Monocolour Series
<b>B-428: Metallised Polyester</b>								
●	B33-616-428	Light Grey	22.86	19.05	-	22.05	3000	B30-R4300
●	B33-5-428	Light Grey	25.40	12.70	-	15.24	5000	B30 Monocolour Series
●	B33-37-428	Light Grey	38.10	12.70	-	15.24	4000	B30 Monocolour Series
●	B33-6-428	Light Grey	38.10	19.05	-	22.23	3000	B30 Monocolour Series
▲	B33-53-428	Light Grey	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-17-428	Light Grey	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-7-428	Light Grey	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-19-428	Light Grey	76.20	50.80	-	53.98	500	B30 Monocolour Series
▲	B33-18-428	Light Grey	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-55-428	Light Grey	101.60	50.80	-	53.98	500	B30 Monocolour Series
◎	B30C-4000-428	Light Grey	101.60	-	39.62	-	1	B30-R4300
<b>B-428/B-966B: Metallised Polyester with Polyester Overlaminat</b>								
●	B33-22-428	Light Grey	31.75	19.05	-	28.58	1700	B30 Monocolour Series
▲	B33-23-428	Light Grey	50.80	25.40	-	34.93	700	B30 Monocolour Series
▲	B33-24-428	Light Grey	69.85	44.45	-	53.98	450	B30 Monocolour Series
<b>B-434A: Metallised Polyester</b>								
●	B33-5-434	Silver	25.40	12.70	-	15.24	5000	B30 Monocolour Series
▲	B33-136-434	Silver	38.10	19.05	-	22.23	1500	B30 Monocolour Series
●	B33-37-434	Silver	38.10	12.70	-	15.24	5000	B30 Monocolour Series
●	B33-6-434	Silver	38.10	19.05	-	22.23	3300	B30 Monocolour Series
▲	B33-17-434	Silver	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-53-434	Silver	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-7-434	Silver	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-18-434	Silver	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-19-434	Silver	76.20	50.80	-	53.98	500	B30 Monocolour Series
▲	B33-55-434	Silver	101.60	50.80	-	53.98	750	B30 Monocolour Series
▲	B33-161-434	Silver	101.60	101.60	-	104.78	350	B30 Monocolour Series
◎	B30C-4000-434	Silver	101.60	-	39.62	-	1	B30-R6000HF
<b>B-435A: Metallised Polyester</b>								
●	B33-5-435	Silver	25.40	12.70	-	15.24	7000	B30 Monocolour Series
●	B33-6-435	Silver	38.10	19.05	-	22.23	3300	B30 Monocolour Series
▲	B33-53-435	Silver	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-7-435	Silver	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-18-435	Silver	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-19-435	Silver	76.20	50.80	-	53.98	500	B30 Monocolour Series
▲	B33-55-435	Silver	101.60	50.80	-	53.98	750	B30 Monocolour Series

>>

## Metallised polyester labels (Continued)

For product labelling, asset tracking and general industrial identification







Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-438: Tamper-evident Metallised Polyester</b>								
◆	B33-5-438	Silver	25.40	12.70	-	15.24	7000	B30 Monocolour Series
▲	B30-17-438	Silver	50.80	25.40	-	28.58	1225	B30 Monocolour Series
▲	B30-18-438	Silver	76.20	25.40	-	31.75	1225	B30 Monocolour Series
▲	B30-222-438	Silver	76.20	50.80	-	57.15	650	B30 Monocolour Series
▲	B33-55-438	Silver	101.60	50.80	-	53.98	750	B30 Monocolour Series
▲	B33-76-438	Silver	101.60	76.20	-	79.38	500	B30 Monocolour Series
∞	B30C-3000-438	Silver	76.20	-	30.48	-	1	B30-R4300
<b>B-480A: Metallic, Non-metal Polyester</b>								
⊙	B30C-4000-480	Light Grey	101.60	-	35.05	-	1	B30-R6000HF
<b>B-486B: Metallised Polyester</b>								
▲	B33-59-486	Light Grey	25.40	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-53-486	Light Grey	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-17-486	Light Grey	50.80	25.40	-	28.58	1300	B30 Monocolour Series
▲	B33-7-486	Light Grey	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-19-486	Light Grey	76.20	50.80	-	53.98	500	B30 Monocolour Series
▲	B33-18-486	Light Grey	76.20	25.40	-	28.58	1300	B30 Monocolour Series
▲	B33-161-486	Light Grey	101.60	101.60	-	104.78	250	B30 Monocolour Series
⊙	B30C-4000-486	Light Grey	101.60	-	35.05	-	1	B30-R4300
<b>B-565: Metallised Polyester</b>								
∞	B30C-1125-565-SL	Silver	28.58	-	30.48	-	1	B30-R10000
∞	B30C-2250-565-SL	Silver	57.15	-	30.48	-	1	B30-R10000
∞	B30C-4000-565-SL	Silver	101.60	-	30.48	-	1	B30-R10000
<b>B-7563: Metallised Polyester</b>								
◆	B33-600-7563	Silver	38.10	19.05	-	22.05	2500	B30-R6000HF
◆	B30-135-7563	Silver	38.10	19.05	-	22.22	3154	B30-R6000HF
▲	B30-17-7563	Silver	50.80	25.40	-	28.58	1226	B30-R6000HF
▲	B30-7-7563	Silver	69.85	31.75	-	34.93	1003	B30-R6000HF
▲	B30-222-7563	Silver	76.20	50.80	-	57.15	649	B30-R6000HF

## B-424 Paper labels

Economical choice for light duty general identification

- White finish and matt topcoat
- Excellent contrast and smear resistance for barcode printing





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-424: Paper</b>								
▲	B33-53-424	White	50.80	12.70	-	15.24	2500	B30 Monocolour Series
▲	B33-17-424	White	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-7-424	White	69.85	31.75	-	34.93	1000	B30 Monocolour Series
▲	B33-20-424	White	76.20	127.00	-	130.18	250	B30 Monocolour Series
▲	B33-19-424	White	76.20	50.80	-	53.98	500	B30 Monocolour Series
▲	B33-18-424	White	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-55-424	White	101.60	50.80	-	53.98	750	B30 Monocolour Series
▲	B33-25-424	White	152.40	101.60	-	155.58	350	B30 Monocolour Series
⊙	B30C-4000-424	White	101.60	-	45.72	-	1	B30-R4300



## B-425 Polypropylene labels

### General labelling material for indoor use

- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use (use B-595 indoor/outdoor vinyl for 8-10 year outdoor use)



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-425A: Polypropylene								
●	B33-5-425	White	25.40	12.70	-	15.24	5000	B30 Monocolour Series
▲	B33-17-425	White	50.80	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-18-425	White	76.20	25.40	-	28.58	1500	B30 Monocolour Series
▲	B33-19-425	White	76.20	50.80	-	53.98	500	B30 Monocolour Series




## B-595 Outdoor grade vinyl labels

### For 8-10 year outdoor use

- Semi-gloss finish
- Good chemical, moisture, UV and weather resistance
- Highly pliable material conforms to rough and curved surfaces and equipment
- Average outdoor durability of the label is 8-10 years depending on the placement



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl								
▲	B30-242-595-BLNKWT	White	28.58	72.39	-	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT	White	76.20	57.15	-	82.55	300	B30-R10000
▲	B30-241-595-BLNKYL	Yellow	76.20	57.15	-	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT	White	97.79	57.15	-	107.95	250	B30-R10000
▲	B30-25-595-BLNKWT	White	152.40	101.60	-	158.75	175	B30-R10000
▲	B30-25-595-BLNKYL	Yellow	152.40	101.60	-	158.75	175	B30-R10000



▶ Average expected **outdoor life of product** will depend on user definition of failure, climatic conditions, mounting techniques and material colour. The up to 8 to 10 year outdoor durability applies to the vinyl label stock only; ribbon durability will vary. A polyester overlamine is recommended for harsh environments - long term exposure to wind and rain.



## B-8423 Polyester labels

For circuit board and component identification

- SMT - Top/Bottom; Through Hole - Bottom; Through Hole - Top




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-8423: Polyester								
●	B33-12-8423	White	12.70	11.10	-	14.13	2500	B30-R6000HF
●	B33-101-8423	White	19.05	6.35	-	9.40	2500	B30-R6000HF
●	B33-G2-8423YL	Yellow	20.00	7.95	-	15.00	5000	B30-R6000HF
●	B33-13-8423	White	31.75	6.35	-	9.35	2500	B30-R6000HF
●	B33-104-8423	White	38.10	6.35	-	9.33	2500	B30-R6000HF



## B-717, B-718 and B-719 Static dissipative polyimide labels

For printed circuit board and electronic component identification

- Static dissipative adhesive and release liner with surface resistivity values
- Complies with EIA-541 Packaging Material Standards for ESD sensitive items
- Withstands the various processes, fluxes and cleaning solvents encountered in the manufacture of PC Boards
- For use on top or bottom-sided component identification or board identification






Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-717: Polyimide								
▲	B33-46-717	White	6.35	19.05	-	8.89	5000	B30 Monocolour Series
●	B33-70-717	White	6.35	6.35	-	8.89	20000	B30 Monocolour Series
●	B33-340-717	White	9.53	9.53	-	12.07	10000	B30 Monocolour Series
●	B33-12-717	White	12.70	11.10	-	13.64	10000	B30 Monocolour Series
▲	B33-341-717	White	16.51	5.08	-	8.26	10000	B30 Monocolour Series
●	B33-1-717	White	19.05	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-2-717	White	22.86	6.35	-	8.89	10000	B30 Monocolour Series
▲	B33-103-717	White	25.40	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-51-717	White	25.40	6.35	-	8.89	10000	B30 Monocolour Series
▲	B33-43-717	White	31.75	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-13-717	White	31.75	6.35	-	9.53	7000	B30 Monocolour Series
▲	B33-45-717	White	38.10	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-4-717	White	38.10	6.35	-	8.89	8000	B30 Monocolour Series
B-718: Polyimide								
●	B33-11-718	White	6.35	6.35	-	9.53	15000	B30 Monocolour Series
▲	B33-46-718	White	6.35	19.05	-	8.89	5000	B30 Monocolour Series
●	B33-38-718	White	9.53	9.53	-	12.07	5000	B30 Monocolour Series
●	B33-340-718	White	9.53	9.53	-	12.07	10000	B30 Monocolour Series
●	B33-12-718	White	12.70	11.10	-	13.64	10000	B30 Monocolour Series
●	B33-341-718	White	16.51	5.08	-	8.26	10000	B30 Monocolour Series
●	B33-1-718	White	19.05	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-49-718	White	22.86	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-2-718	White	22.86	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-51-718	White	25.40	6.35	-	8.89	10000	B30 Monocolour Series
▲	B33-103-718	White	25.40	6.35	-	8.89	4000	B30 Monocolour Series
●	B33-3-718	White	25.40	9.53	-	12.07	10000	B30 Monocolour Series
●	B33-5-718	White	25.40	12.70	-	15.24	10000	B30 Monocolour Series
●	B33-13-718	White	31.75	6.35	-	9.53	7000	B30 Monocolour Series

>>

## B-717, B-718 and B-719 Static dissipative polyimide labels (Continued)

For printed circuit board and electronic component identification

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B33-45-718	White	38.10	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-4-718	White	38.10	6.35	-	8.89	8000	B30 Monocolour Series
▲	B33-72-718	White	44.45	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-15-718	White	50.80	6.35	-	9.53	3200	B30 Monocolour Series
<b>B-719: Polyimide</b>								
▲	B33-46-719	White	6.35	19.05	-	8.89	5000	B30 Monocolour Series
●	B33-70-719	White	6.35	6.35	-	8.89	20000	B30 Monocolour Series
●	B33-38-719	White	9.53	9.53	-	12.07	5000	B30 Monocolour Series
●	B33-340-719	White	9.53	9.53	-	12.07	10000	B30 Monocolour Series
●	B33-12-719	White	12.70	11.10	-	13.64	10000	B30 Monocolour Series
●	B33-341-719	White	16.51	5.08	-	8.26	10000	B30 Monocolour Series
●	B33-1-719	White	19.05	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-2-719	White	22.86	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-51-719	White	25.40	6.35	-	8.89	10000	B30 Monocolour Series
▲	B33-103-719	White	25.40	6.35	-	8.89	4000	B30 Monocolour Series
●	B33-5-719	White	25.40	12.70	-	15.24	7000	B30 Monocolour Series
▲	B33-43-719	White	31.75	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-13-719	White	31.75	6.35	-	9.53	7000	B30 Monocolour Series
●	B33-4-719	White	38.10	6.35	-	8.89	8000	B30 Monocolour Series




## B-724 and B-727 Standard polyimide labels

For circuit board labels and high-temperature general identification applications




- Withstands the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards
- For use on top bottom-side component identification or board identification
- 2 temperature levels to meet your needs



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-724: Polyimide</b>								
▲	B33-46-724	Amber	6.35	19.05	-	8.89	5000	B30 Monocolour Series
●	B33-340-724	Amber	9.53	9.53	-	12.07	10000	B30 Monocolour Series
▲	B33-344-724	Amber	12.70	5.08	-	8.26	3700	B30 Monocolour Series
●	B33-12-724	Amber	12.70	11.10	-	13.64	10000	B30 Monocolour Series
●	B33-341-724	Amber	16.51	5.08	-	8.26	10000	B30 Monocolour Series
▲	B33-342-724	Amber	16.51	5.08	-	8.26	3700	B30 Monocolour Series
●	B33-1-724	Amber	19.05	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-2-724	Amber	22.86	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-51-724	Amber	25.40	6.35	-	8.89	10000	B30 Monocolour Series
▲	B33-103-724	Amber	25.40	6.35	-	8.89	4000	B30 Monocolour Series
●	B33-5-724	Amber	25.40	12.70	-	15.24	7000	B30 Monocolour Series
●	B33-13-724	Amber	31.75	6.35	-	9.53	7000	B30 Monocolour Series
●	B33-4-724	Amber	38.10	6.35	-	8.89	5000	B30 Monocolour Series
○	B30C-4000-724	Amber	101.00	-	39.60	-	1	B30-R4300
<b>B-727: Polyimide</b>								
●	B33-11-727	White	6.35	6.35	-	9.53	5000	B30 Monocolour Series
●	B33-70-727	White	6.35	6.35	-	8.89	20000	B30 Monocolour Series
●	B33-71-727	White	8.00	8.00	-	11.43	20000	B30 Monocolour Series
●	B33-38-727	White	9.53	9.53	-	12.07	5000	B30 Monocolour Series
●	B33-340-727	White	9.53	9.53	-	12.07	10000	B30 Monocolour Series



>>



## B-724 and B-727 Standard polyimide labels (Continued)

For circuit board labels and high-temperature general identification applications

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
●	B33-12-727	White	12.70	11.10	-	13.64	10000	B30 Monocolour Series
●	B33-341-727	White	16.51	5.08	-	8.26	10000	B30 Monocolour Series
▲	B33-342-727	White	16.51	5.08	-	8.26	3700	B30 Monocolour Series
●	B33-1-727	White	19.05	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-2-727	White	22.86	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-49-727	White	22.86	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-103-727	White	25.40	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-58-727	White	25.40	9.53	-	12.07	4000	B30 Monocolour Series
▲	B33-59-727	White	25.40	12.70	-	15.24	2500	B30 Monocolour Series
●	B33-51-727	White	25.40	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-3-727	White	25.40	9.53	-	12.07	10000	B30 Monocolour Series
●	B33-5-727	White	25.40	12.70	-	15.24	7000	B30 Monocolour Series
▲	B33-43-727	White	31.75	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-13-727	White	31.75	6.35	-	9.53	5000	B30 Monocolour Series
▲	B33-44-727	White	34.93	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-45-727	White	38.10	6.35	-	8.89	5000	B30 Monocolour Series
●	B33-4-727	White	38.10	6.35	-	8.89	10000	B30 Monocolour Series
▲	B33-72-727	White	44.45	6.35	-	8.89	5000	B30 Monocolour Series
▲	B33-15-727	White	50.80	6.35	-	9.53	3200	B30 Monocolour Series
◎	B30C-4000-727	White	101.00	-	39.60	-	1	B30-R6000HF
<b>B-728: Polyimide</b>								
●	B33-70-728	White	6.35	6.35	-	8.89	20000	B30 Monocolour Series
●	B33-340-728	White	9.53	9.53	-	12.07	10000	B30 Monocolour Series
●	B33-12-728	White	12.70	11.10	-	13.64	10000	B30 Monocolour Series
●	B33-341-728	White	16.51	5.08	-	8.26	10000	B30 Monocolour Series
●	B33-1-728	White	19.05	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-2-728	White	22.86	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-5-728	White	25.40	12.70	-	15.24	7000	B30 Monocolour Series
●	B33-51-728	White	25.40	6.35	-	8.89	10000	B30 Monocolour Series
▲	B33-103-728	White	25.40	6.35	-	8.89	4000	B30 Monocolour Series
●	B33-13-728	White	31.75	6.35	-	9.53	7000	B30 Monocolour Series
▲	B33-43-728	White	31.75	6.35	-	8.89	4000	B30 Monocolour Series
●	B33-4-728	White	38.10	6.35	-	8.89	8000	B30 Monocolour Series
<b>B-729: Polyimide</b>								
●	B33-70-729	White	6.35	6.35	-	8.89	20000	B30 Monocolour Series
●	B33-340-729	White	9.53	9.53	-	12.07	10000	B30 Monocolour Series
●	B33-12-729	White	12.70	11.10	-	13.64	10000	B30 Monocolour Series
●	B33-341-729	White	16.51	5.08	-	8.26	10000	B30 Monocolour Series
●	B33-1-729	White	19.05	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-2-729	White	22.86	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-5-729	White	25.40	12.70	-	15.24	7000	B30 Monocolour Series
●	B33-51-729	White	25.40	6.35	-	8.89	10000	B30 Monocolour Series
▲	B33-103-729	White	25.40	6.35	-	8.89	4000	B30 Monocolour Series
●	B33-13-729	White	31.75	6.35	-	9.53	7000	B30 Monocolour Series
▲	B33-43-729	White	31.75	6.35	-	8.89	4000	B30 Monocolour Series
●	B33-4-729	White	38.10	6.35	-	8.89	8000	B30 Monocolour Series
<b>B-777: Polyimide</b>								
●	B33-340-777	White	9.53	9.53	-	12.07		B30 Monocolour Series
●	B33-341-777	White	16.51	5.08	-	8.26		B30 Monocolour Series
●	B33-2-777	White	22.86	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-51-777	White	25.40	6.35	-	8.89	10000	B30 Monocolour Series
●	B33-13-777	White	31.75	6.35	-	9.53	7000	B30 Monocolour Series
●	B33-4-777	White	38.10	6.35	-	8.89	8000	B30 Monocolour Series



## B-593 Raised profile labels - Push button style

Lower cost than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (total thickness = 0.65 mm)
- High performance, low cost substitute to engraved plates
- 10 year outdoor durability rating
- On-demand labelling: labels print out in less than 4 seconds
- 5 push button sizes (including keyed with 22.50 and 30.50 mm hole diam and non-keyed with 22.50 mm hole diam)



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-593: Polyester							
	B30EP-167-593-BK	Black	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-167-593-GN	Green	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-167-593-RD	Red	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-167-593-WT	White	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-167-593-YL	Yellow	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-167U-593-BK	Black	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-167U-593-GN	Green	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-167U-593-RD	Red	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-167U-593-WT	White	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-167U-593-YL	Yellow	30.48	38.10	44.45	200	B30 Monocolour Series
	B30EP-168-593-BK	Black	30.48	48.26	53.98	180	B30 Monocolour Series
	B30EP-168-593-GN	Green	30.48	48.26	53.98	180	B30 Monocolour Series
	B30EP-168-593-RD	Red	30.48	48.26	53.98	180	B30 Monocolour Series
	B30EP-168-593-WT	White	30.48	48.26	53.98	180	B30 Monocolour Series
	B30EP-168-593-YL	Yellow	30.48	48.26	53.98	180	B30 Monocolour Series
	B30EP-169-593-BK	Black	45.72	45.72	50.80	190	B30 Monocolour Series
	B30EP-169-593-GN	Green	45.72	45.72	50.80	190	B30 Monocolour Series
	B30EP-169-593-RD	Red	45.72	45.72	50.80	190	B30 Monocolour Series
	B30EP-169-593-WT	White	45.72	45.72	50.80	190	B30 Monocolour Series
	B30EP-169-593-YL	Yellow	45.72	45.72	50.80	190	B30 Monocolour Series
	B30EP-170-593-BK	Black	60.96	60.96	66.68	145	B30 Monocolour Series
	B30EP-170-593-GN	Green	60.96	60.96	66.68	145	B30 Monocolour Series
	B30EP-170-593-RD	Red	60.96	60.96	66.68	145	B30 Monocolour Series
	B30EP-170-593-WT	White	60.96	60.96	66.68	145	B30 Monocolour Series
	B30EP-170-593-YL	Yellow	60.96	60.96	66.68	145	B30 Monocolour Series



## B-593 Raised profile labels

Lower cost than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.65 mm)
- Ideal for inside-panel backer board labels and front-of-enclosure labelling
- On-demand labelling: labels print out in less than 4 seconds
- No need to abbreviate your text to avoid per character engraving charges
- 10-year outdoor durability rating
- 6 colours, 7 rectangular sizes




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-593: Polyester							
	B30EP-171-593-BK	Black	26.92	12.45	19.05	500	B30 Monocolour Series
	B30EP-171-593-GN	Green	26.92	12.45	19.05	500	B30 Monocolour Series



>>

## B-593 Raised profile labels (Continued)

Lower cost than engraved legend plates




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B30EP-171-593-RD	Red	26.92	12.45	19.05	500	B30 Monocolour Series
▲	B30EP-171-593-SL	Silver	26.92	12.45	19.05	500	B30 Monocolour Series
▲	B30EP-171-593-WT	White	27.00	12.45	19.05	500	B30 Monocolour Series
▲	B30EP-171-593-YL	Yellow	26.92	12.45	19.05	500	B30 Monocolour Series
▲	B30EP-172-593-BK	Black	44.96	15.00	21.59	450	B30 Monocolour Series
▲	B30EP-172-593-GN	Green	44.96	15.00	21.59	450	B30 Monocolour Series
▲	B30EP-172-593-RD	Red	44.96	15.00	21.59	450	B30 Monocolour Series
▲	B30EP-172-593-SL	Silver	44.96	15.00	21.59	450	B30 Monocolour Series
▲	B30EP-172-593-WT	White	44.96	15.00	21.59	450	B30 Monocolour Series
▲	B30EP-172-593-YL	Yellow	44.96	15.00	21.59	450	B30 Monocolour Series
▲	B30EP-173-593-BK	Black	50.80	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-173-593-GN	Green	50.80	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-173-593-RD	Red	50.80	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-173-593-SL	Silver	50.80	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-173-593-WT	White	50.80	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-173-593-YL	Yellow	50.80	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-174-593-BK	Black	101.60	25.40	28.58	300	B30 Monocolour Series
▲	B30EP-174-593-GN	Green	101.60	25.40	28.58	300	B30 Monocolour Series
▲	B30EP-174-593-RD	Red	101.60	25.40	28.58	300	B30 Monocolour Series
▲	B30EP-174-593-SL	Silver	101.60	25.40	28.58	300	B30 Monocolour Series
▲	B30EP-174-593-WT	White	101.60	25.40	28.58	300	B30 Monocolour Series
▲	B30EP-174-593-YL	Yellow	101.60	25.40	28.58	300	B30 Monocolour Series
▲	B30EP-175-593-BK	Black	76.20	19.05	25.40	375	B30 Monocolour Series
▲	B30EP-175-593-GN	Green	76.20	19.05	25.40	375	B30 Monocolour Series
▲	B30EP-175-593-WT	White	76.20	19.05	25.40	375	B30 Monocolour Series
▲	B30EP-175-593-YL	Yellow	76.20	19.05	25.40	375	B30 Monocolour Series
▲	B30EP-176-593-BK	Black	76.20	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-176-593-GN	Green	76.20	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-176-593-WT	White	76.20	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-176-593-YL	Yellow	76.20	25.40	31.75	300	B30 Monocolour Series
▲	B30EP-177-593-BK	Black	76.20	63.50	69.85	125	B30 Monocolour Series
▲	B30EP-177-593-GN	Green	76.20	63.50	69.85	125	B30 Monocolour Series
▲	B30EP-177-593-WT	White	76.20	63.50	69.85	125	B30 Monocolour Series
▲	B30EP-177-593-YL	Yellow	76.20	63.50	69.85	125	B30 Monocolour Series



## Inside-panel component labels

For automation & electrical panels and enclosures

- Various sizes in several durable material types
- Ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components








Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-422: Polyester								
⊙	B33C-375-422	White	9.53	–	25.91 m	–	1	B30-R6000HF
B-483A: Polyester								
◆	B33-149-483	White	12.70	12.70	–	15.24	5000	B30 Monocolour Series
◆	B33-5-483	White	25.40	12.70	–	15.24	5000	B30 Monocolour Series
▲	B33-17-483	White	50.80	25.40	–	28.58	1500	B30 Monocolour Series
▲	B33-7-483	White	69.85	31.75	–	34.93	1000	B30 Monocolour Series
▲	B33-19-483	White	76.20	50.80	–	53.98	500	B30 Monocolour Series

>>

## Inside-panel component labels (Continued)

For automation & electrical panels and enclosures

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
▲	B33-18-483	White	76.20	25.40		28.58	1500	B30 Monocolour Series
▲	B33-55-483	White	101.60	50.80		53.98	750	B30 Monocolour Series
<b>B-484A: Polyester</b>								
▲	B33-125-484	White	22.86	12.70		15.24	1500	B30 Monocolour Series
●	B33-5-484	White	25.40	12.70		15.24	5000	B30 Monocolour Series
▲	B33-136-484	White	38.10	19.05		22.23	1500	B30 Monocolour Series
▲	B33-17-484	White	50.80	25.40		28.58	1500	B30 Monocolour Series
▲	B33-18-484	White	76.20	25.40		28.58	1500	B30 Monocolour Series
▲	B33-19-484	White	76.20	50.80		53.98	500	B30 Monocolour Series
▲	B33-55-484	White	101.60	50.80		53.98	750	B30 Monocolour Series
▲	B33-161-484	White	101.60	101.60		104.78	350	B30 Monocolour Series
<b>B-498: Vinyl Cloth</b>								
●	B33-90-498	White	6.35	36.50		39.70	2500	B30 Monocolour Series
●	B33-87-498	White	12.70	36.50		39.70	2500	B30 Monocolour Series
●	B33-68-498	White	12.70	19.05		21.59	5000	B30 Monocolour Series
●	B33-1-498	White	19.05	6.35		8.89	5000	B30 Monocolour Series
▲	B33-254-498	White	19.05	19.05		21.59	1000	B30 Monocolour Series
●	B33-95-498	White	20.32	36.50		39.70	2300	B30 Monocolour Series
●	B33-88-498	White	25.40	19.05		22.23	2500	B30 Monocolour Series
●	B33-5-498	White	25.40	12.70		15.24	5000	B30 Monocolour Series
●	B33-89-498	White	25.40	36.50		39.70	2300	B30 Monocolour Series
●	B33-325-498	White	25.40	63.50		66.68	700	B30 Monocolour Series
●	B33-326-498	White	25.40	101.60		104.78	450	B30 Monocolour Series
●	B33-327-498	White	38.10	101.60		104.78	450	B30 Monocolour Series
●	B33-328-498	White	38.10	152.40		155.58	300	B30 Monocolour Series
<b>B-499: Nylon Cloth</b>								
●	B33-68-499	White	12.70	19.05		21.59	1500	B30 Monocolour Series
●	B33-165-499	White	20.32	36.50		39.70	2500	B30 Monocolour Series
▲	B33-125-499	White	22.86	12.70		15.24	1500	B30 Monocolour Series
●	B33-152-499	White	25.40	9.53		12.07	1500	B30 Monocolour Series
▲	B33-136-499	White	38.10	19.05		22.23	1500	B30 Monocolour Series
▲	B33-151-499	White	50.80	6.35		8.89	1500	B30 Monocolour Series
/	B33-143-499	White	-	-		12.70	1500	B30 Monocolour Series
/	B33-144-499	White	-	-		15.88	1500	B30 Monocolour Series
/	B33-602-499	White	-	-		16.50	3000	B30-R6000HF
/	B33-603-499	White	-	-		15.70	3000	B30-R6000HF
/	B33-602-499YL	Yellow	-	-		16.50	3000	B30-R6000HF
/	B33-603-499YL	Yellow	-	-		15.70	3000	B30-R6000HF
<b>B-593: Polyester</b>								
▲	B30EP-171-593-BK	Black	26.92	12.45		19.05	500	B30 Monocolour Series
▲	B30EP-171-593-SL	Silver	26.92	12.45		19.05	500	B30 Monocolour Series
▲	B30EP-171-593-WT	White	27.00	12.45		19.05	500	B30 Monocolour Series
<b>B-595: Vinyl</b>								
∞	B30C-500-595-WT	White	12.70	-	30.48 m	-	1	B30-R10000
∞	B30C-500-595-YL	Yellow	12.70	-	30.48 m	-	1	B30-R10000



## B-498 Adhesive terminal block markers

Holds strong but can be removed cleanly and re-applied

- Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- Highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and re-application





Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-498: Vinyl Cloth</b>							
⊙	B33C-312-498	White	7.92	25.91 m	-	1	B30-R6200
⊙	B33C-375-498	White	9.53	25.91 m	-	1	B30-R6200

## Self-laminating wire & cable markers

### Brady's most popular wire marker

- Features white printable area with clear "tail" that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- B-427 uses a permanent acrylic adhesive designed specifically for tightly curved surfaces
- B-417 offers an extra-strong permanent adhesive acrylic adhesive ideal for small-gauge wires


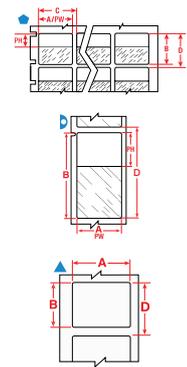


Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-417: Self-laminating Vinyl</b>								
◆	B33-80-417	White, Transparent	12.70	19.05	9.50	24.13	2500	B30 Monocolour Series
◆	B33-8-417	White, Transparent	12.70	36.50	12.70	41.28	5000	B30 Monocolour Series
◆	B33-56-417	White, Transparent	19.05	23.80	9.50	28.58	5000	B30 Monocolour Series
◆	B33-73-417	White, Transparent	19.05	44.45	12.70	47.63	3500	B30 Monocolour Series
◆	B33-116-417	White, Transparent	25.40	25.40	9.50	28.58	2500	B30 Monocolour Series
◆	B33-9-417	White, Transparent	25.40	36.50	12.70	41.28	2500	B30 Monocolour Series
◆	B33-75-417	White, Transparent	25.40	57.15	19.00	60.33	1400	B30 Monocolour Series
◆	B33-10-417	White, Transparent	25.40	95.25	25.40	101.60	1200	B30 Monocolour Series
◆	B33-81-417	White, Transparent	25.40	152.40	38.10	157.15	500	B30 Monocolour Series
▷	B33-119-417	White, Transparent	38.10	38.10	12.70	41.28	1000	B30 Monocolour Series
▷	B33-27-417	White, Transparent	50.80	95.25	25.40	101.60	400	B30 Monocolour Series
▷	B33-26-417	White, Transparent	63.50	57.15	19.00	61.93	500	B30 Monocolour Series
<b>B-427: Self-laminating Vinyl</b>								
▷	B33-8-427	White, Transparent	12.70	36.50	12.70	41.30	5000	B30 Monocolour Series
▷	B33-80-427	White, Transparent	12.70	19.05	9.53	24.13	2500	B30 Monocolour Series
▷	B33-113-427	White, Transparent	12.70	25.40	9.53	28.58	2500	B30 Monocolour Series
▷	B33-73-427	White, Transparent	19.05	44.45	12.70	47.60	3500	B30 Monocolour Series
▷	B33-56-427	White, Transparent	19.05	23.80	9.53	28.58	5000	B30 Monocolour Series
▷	B33-74-427	White, Transparent	20.32	36.50	12.70	41.30	4000	B30 Monocolour Series
▷	B33-115-427	White, Transparent	25.40	19.05	9.53	21.59	2500	B30 Monocolour Series
▷	B33-131-427	White, Transparent	25.40	66.68	25.40	28.58	1500	B30 Monocolour Series
▷	B33-9-427	White, Transparent	25.40	36.50	12.70	41.30	2500	B30 Monocolour Series
▷	B33-81-427	White, Transparent	25.40	152.40	38.10	157.10	500	B30 Monocolour Series
▷	B33-75-427	White, Transparent	25.40	57.15	19.05	60.30	1400	B30 Monocolour Series
▷	B33-10-427	White, Transparent	25.40	95.25	25.40	101.60	1200	B30 Monocolour Series
▷	B33-116-427	White, Transparent	25.40	25.40	9.53	28.58	2500	B30 Monocolour Series
▷	B33-117-427	White, Transparent	25.40	31.75	-	34.93	2000	B30 Monocolour Series
▷	B33-211-427	White, Transparent	25.40	25.40	9.53	32.13	3000	B30-R4300
▷	B33-311-427	White, Transparent	25.40	31.75	12.70	37.72	3000	B30-R4300
▷	B33-511-427	White, Transparent	25.40	63.50	19.05	70.64	1500	B30-R4300
▲	B33-135-427AW	White	38.10	19.05	19.05	22.23	1500	B30 Monocolour Series
▷	B33-272-427	White, Transparent	38.10	57.15	19.05	63.50	700	B30 Monocolour Series
▷	B33-119-427	White, Transparent	38.10	38.10	12.70	41.30	1000	B30 Monocolour Series
▷	B33-118-427	White, Transparent	38.10	25.40	9.53	28.58	1250	B30 Monocolour Series
▷	B33-517-427	White, Transparent	38.10	63.50	19.05	69.85	1000	B30-R4300
▷	B33-273-427	White, Transparent	44.45	57.15	19.05	63.50	500	B30 Monocolour Series
▷	B33-121-427	White, Transparent	44.45	38.10	12.70	41.30	1000	B30 Monocolour Series
▷	B33-120-427	White, Transparent	44.45	25.40	9.53	28.58	1250	B30 Monocolour Series
▲	B33-137-427AW	White	50.80	25.40	25.40	28.58	1500	B30 Monocolour Series
▷	B33-82-427	White, Transparent	50.80	152.40	38.10	157.15	200	B30 Monocolour Series
▷	B33-27-427	White, Transparent	50.80	95.25	25.40	101.60	400	B30 Monocolour Series
▲	B33-640-427AW	White	55.88	38.10	38.10	45.08	1500	B30-R4300
▷	B33-26-427	White, Transparent	63.50	57.15	19.05	61.90	500	B30 Monocolour Series
▲	B33-648-427AW	White	66.68	25.40	25.40	32.38	1500	B30-R4300




## B-427 rotating self-laminating labels

Legible from any angle: identify cables faster

- The B-427 self-laminating Rotating Label version can increase the speed of cable identification because its print can be read from any angle.
- The label can be rotated around a cable thanks to a non-adhesive printable zone and a translucent, self-adhesive laminate that is wrapped around a cable.



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Printable Area Height PH (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-427: Self-laminating Vinyl								
	B33RO-292-427	White, Transparent	12.70	44.45	17.78	65.41	1500	R4300
	B33RO-293-427	White, Transparent	12.70	69.85	27.94	100.97	900	R4300
	B33RO-294-427	White, Transparent	25.40	44.45	17.78	65.41	1000	R4300
	B33RO-295-427	White, Transparent	25.40	69.85	27.94	100.97	700	R4300
	B33RO-296-427	White, Transparent	25.40	79.38	31.75	114.30	600	R4300
	B33RO-297-427	White, Transparent	25.40	30.48	12.70	46.36	600	R4300
	B33RO-299-427	White, Transparent	50.80	79.38	31.75	114.30	250	R4300




## B-425 Fibre optic labels

Ideal for marking fibre optic cables

- Allows you to handle and view labels without touching the wires



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-425A: Polypropylene							
	B33FP-01-425	White	30.00	10.00	26.03	1000	B30-R4300
	B33FT-01-425	White	30.00	10.00	46.03	1000	B30-R4300




## B-498 Repositionable vinyl cloth wire & cable markers


Holds strong but can be removed cleanly and re-applied

- A vinyl cloth label for marking wires, cables and inside-panel components
- Highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and re-application
- Ideal choice for marking both ends of a wire that you may need to cut shorted before final termination



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-498: Vinyl Cloth							
	B33-1-498	White	19.05	6.35	8.89	5000	B30 Monocolour Series
	B33-254-498	White	19.05	19.05	21.59	1000	B30 Monocolour Series
	B33-325-498	White	25.40	63.50	66.68	700	B30 Monocolour Series
	B33-326-498	White	25.40	101.60	104.78	450	B30 Monocolour Series
	B33-327-498	White	38.10	101.60	104.78	450	B30 Monocolour Series
	B33-5-498	White	25.40	12.70	15.24	5000	B30 Monocolour Series
	B33-68-498	White	12.70	19.05	21.59	5000	B30 Monocolour Series
	B33-87-498	White	12.70	36.50	39.70	2500	B30 Monocolour Series
	B33-88-498	White	25.40	19.05	22.23	2500	B30 Monocolour Series
	B33-89-498	White	25.40	36.50	39.70	2300	B30 Monocolour Series
	B33-90-498	White	6.35	36.50	39.70	2500	B30 Monocolour Series
	B33-91-498	White	19.05	23.80	27.00	2500	B30 Monocolour Series
	B33-95-498	White	20.32	36.50	39.70	2300	B30 Monocolour Series





## B-499 Wire & cable markers

This nylon cloth material has superb adhesive power, making it a flexible all surfaces solution




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-499: Nylon Cloth							
▲	B33-125-499	White	22.86	12.70	15.24	1500	B30 Monocolour Series
●	B33-1-499	White	19.05	6.35	8.89	10000	B30 Monocolour Series
▲	B33-151-499	White	50.80	6.35	8.89	1500	B30 Monocolour Series
●	B33-152-499	White	25.40	9.53	12.07	1500	B30 Monocolour Series
▲	B33-254-499	White	19.05	19.05	21.59	1000	B30 Monocolour Series
●	B33-325-499	White	25.40	63.50	66.68	700	B30 Monocolour Series
●	B33-326-499	White	25.40	101.60	104.78	450	B30 Monocolour Series
●	B33-327-499	White	38.10	101.60	104.78	450	B30 Monocolour Series
●	B33-328-499	White	38.10	152.40	155.58	300	B30 Monocolour Series
●	B33-5-499	White	25.40	12.70	15.24	5000	B30 Monocolour Series
●	B33-611-499	White	12.70	25.40	28.40	3000	B30-R6000HF
▲	B33-620-499	White	12.70	25.40	28.40	1000	B30-R6000HF
●	B33-621-499	White	25.40	36.50	39.50	3000	B30-R6000HF
●	B33-625-499	White	25.40	66.68	69.68	1500	B30-R6000HF
▲	B33-659-499	White	25.40	12.45	15.40	1000	B30-R6000HF
●	B33-87-499	White	12.70	36.50	39.67	2500	B30 Monocolour Series
●	B33-88-499	White	25.40	19.05	22.23	2500	B30 Monocolour Series
●	B33-89-499	White	25.40	36.58	39.67	2300	B30 Monocolour Series
●	B33-90-499	White	6.35	36.50	39.67	2500	B30 Monocolour Series
●	B33-91-499	White	19.05	23.80	26.97	2500	B30 Monocolour Series



## B-472 Polyimide high temp adhesive wire & cable labels

Topcoated Polyimide label for wire & cable marking where high temperature and self-extinguishing features are required

- Heavy duty performance with excellent resistance to water, oil and other fluids




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-472: Polyimide							
●	B33-11-472	White	6.35	6.35	9.53	15000	B30 Monocolour Series
●	B33-1-472	White	19.05	6.35	8.89	5000	B30 Monocolour Series
●	B33-2-472	White	22.86	6.35	8.89	5000	B30 Monocolour Series
●	B33-29-472	White	31.75	9.53	12.07	5000	B30 Monocolour Series
●	B33-5-472	White	25.40	12.70	15.24	5000	B30 Monocolour Series
●	B33-5-472YL	Yellow	25.40	12.70	15.24	5000	B30 Monocolour Series
⊙	B33C-1000-472	White	25.40	–	–	1	B30-R4300
⊙	B33C-1000-472YL	Yellow	25.40	–	–	1	B30-R4300
⊙	B33C-1500-472	White	38.10	–	–	1	B30-R4300
⊙	B33C-1500-472YL	Yellow	38.10	–	–	1	B30-R4300
⊙	B33C-2000-472	White	50.80	–	–	1	B30-R4300
⊙	B33C-2000-472YL	Yellow	50.80	–	–	1	B30-R4300
⊙	B33C-3000-472	White	76.20	–	–	1	B30-R4300
⊙	B33C-3000-472YL	Yellow	76.20	–	–	1	B30-R4300


## B-437 Tedlar adhesive wire & cable labels

Topcoated Polyvinylfluoride label for wire & cable marking where high temperature and self-extinguishing features are required

- Heavy duty performance with excellent resistance to water, oil and other fluids
- Meets MIL-M-87958 Standard



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-437: Polyvinylfluoride							
⊙	B30C-4000-437	White	101.60	–	–	1	B30-R4300
⊙	B33-11-437	White	6.35	6.35	9.53	15000	B30 Monocolour Series
⊙	B33-1-437	White	19.05	6.35	8.89	5000	B30 Monocolour Series
⊙	B33-29-437	White	31.75	9.53	12.07	5000	B30 Monocolour Series
⊙	B33-29-437YL	Yellow	31.75	9.53	12.07	5000	B30 Monocolour Series
⊙	B33-5-437	White	25.40	12.70	15.19	5000	B30 Monocolour Series
⊙	B33-5-437YL	Yellow	25.40	12.70	15.19	5000	B30 Monocolour Series
⊙	B33C-1000-437	White	25.40	–	–	1	B30-R4300
⊙	B33C-1000-437YL	Yellow	25.40	–	–	1	B30-R4300
⊙	B33C-1500-437	White	38.10	–	–	1	B30-R4300
⊙	B33C-2000-437	White	50.80	–	–	1	B30-R4300
⊙	B33C-2000-437YL	Yellow	50.80	–	–	1	B30-R4300
⊙	B33C-3000-437	White	76.20	–	–	1	B30-R4300



## B-7599 Polyethylene tag

Rapido wire marking sleeves





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7599: Polyethylene							
⊙	B33R-01-7599-YL	Yellow	23.00	5.20	8.39	2500	B30-R4300, B30-R6200
⊙	B33R-02-7599-YL	Yellow	23.00	5.20	8.39	2500	B30-R4300, B30-R6200
⊙	B33R-03-7599-YL	Yellow	25.00	5.70	8.89	2500	B30-R4300, B30-R6200




## B-7597 Tear resistant tags

This tag can be used for a variety of applications including identification of multi-conductor cables, inventory and equipment

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7597: Polyethylene							
▲	B33-7597W-2050	White	50.80	12.70	16.72	2000	B30-R4300





## B-7598 Polyester cable tag

Durable outdoor cable identification

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7598: Polyester							
	B33-60x10-7598-BK	Black	60.00	10.00	15.08	1000	B30-R4400-WT
	B33-60x10-7598-BL	Blue	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-GN	Green	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-RD	Red	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-SV	Silver	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-WT	White	60.00	10.00	15.08	1000	B30-R6000HF
	B33-60x10-7598-YL	Yellow	60.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-BK	Black	75.00	10.00	15.08	1000	B30-R4400-WT
	B33-75x10-7598-BL	Blue	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-GN	Green	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-RD	Red	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-SV	Silver	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-WT	White	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x10-7598-YL	Yellow	75.00	10.00	15.08	1000	B30-R6000HF
	B33-75x15-7598-BK	Black	75.00	15.00	20.02	1000	B30-R4400-WT
	B33-75x15-7598-BL	Blue	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-GN	Green	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-RD	Red	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-SV	Silver	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-WT	White	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x15-7598-YL	Yellow	75.00	15.00	20.02	1000	B30-R6000HF
	B33-75x25-7598-BK	Black	75.00	25.00	30.16	500	B30-R4400-WT
	B33-75x25-7598-BL	Blue	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-GN	Green	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-RD	Red	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-SV	Silver	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-WT	White	75.00	25.00	30.16	500	B30-R6000HF
	B33-75x25-7598-YL	Yellow	75.00	25.00	30.16	500	B30-R6000HF



## B-7643 Halogen-free cable tag

Easily print cable tags wherever you are




Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7643: Thermoplastic Polyether Polyurethane							
	B33-60x10-7643-BK	Black	60.00	10.00	15.08	750	B30-R4400-WT
	B33-60x10-7643-BL	Blue	60.00	10.00	15.08	750	B30-R6000HF
	B33-60x10-7643-GN	Green	60.00	10.00	15.08	750	B30-R6000HF
	B33-60x10-7643-OR	Orange	60.00	10.00	15.08	750	B30-R6000HF
	B33-60x10-7643-RD	Red	60.00	10.00	15.08	750	B30-R6000HF
	B33-60x10-7643-YL	Yellow	60.00	10.00	15.08	750	B30-R6000HF
	B33-75x10-7643-BK	Black	75.00	10.00	15.08	750	B30-R4400-WT
	B33-75x10-7643-BL	Blue	75.00	10.00	15.08	750	B30-R6000HF
	B33-75x10-7643-GN	Green	75.00	10.00	15.08	750	B30-R6000HF
	B33-75x10-7643-OR	Orange	75.00	10.00	15.08	750	B30-R6000HF
	B33-75x10-7643-RD	Red	75.00	10.00	15.08	750	B30-R6000HF
	B33-75x10-7643-WT	White	75.00	10.00	15.08	750	B30-R6000HF
	B33-75x10-7643-YL	Yellow	75.00	10.00	15.08	750	B30-R6000HF

>>

## B-7643 Halogen-free cable tag (Continued)

Easily print cable tags wherever you are


Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
	B33-75x15-7643-BK	Black	75.00	15.00	20.02	500	B30-R4400-WT
	B33-75x15-7643-BL	Blue	75.00	15.00	20.02	500	B30-R6000HF
	B33-75x15-7643-GN	Green	75.00	15.00	20.02	500	B30-R6000HF
	B33-75x15-7643-OR	Orange	75.00	15.00	20.02	500	B30-R6000HF
	B33-75x15-7643-RD	Red	75.00	15.00	20.02	500	B30-R6000HF
	B33-75x15-7643-WT	White	75.00	15.00	20.02	500	B30-R6000HF
	B33-75x15-7643-YL	Yellow	75.00	15.00	20.02	500	B30-R6000HF
	B33-75x25-7643-BK	Black	75.00	25.00	30.16	250	B30-R4400-WT
	B33-75x25-7643-BL	Blue	75.00	25.00	30.16	250	B30-R6000HF
	B33-75x25-7643-GN	Green	75.00	25.00	30.16	250	B30-R6000HF
	B33-75x25-7643-OR	Orange	75.00	25.00	30.16	250	B30-R6000HF
	B33-75x25-7643-RD	Red	75.00	25.00	30.16	250	B30-R6000HF
	B33-75x25-7643-WT	White	75.00	25.00	30.16	250	B30-R6000HF
	B33-75x25-7643-YL	Yellow	75.00	25.00	30.16	250	B30-R6000HF



## B-348 Mass transit cable tag

Fully compliant mass transit tag

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-348: Polyolefin							
	B33-6010-348-WT	White	60.00	10.00	15.08	750	B30-R6000HF
	B33-6010-348-YL	Yellow	60.00	10.00	15.08	750	B30-R6000HF
	B33-7510-348-WT	White	75.00	10.00	15.08	750	B30-R6000HF
	B33-7510-348-YL	Yellow	75.00	10.00	15.08	750	B30-R6000HF
	B33-7515-348-WT	White	75.00	15.00	20.02	500	B30-R6000HF
	B33-7515-348-YL	Yellow	75.00	15.00	20.02	500	B30-R6000HF
	B33-7525-348-WT	White	75.00	25.00	30.16	250	B30-R6000HF
	B33-7525-348-YL	Yellow	75.00	25.00	30.16	250	B30-R6000HF



## How to select a wire marker

There are four main questions to ask yourself when you're starting the process of marking wires. These questions will help you select a wire marker that best suits your needs.

### 1. Are you marking the wire after termination?

Sleeve markers can only be used before termination because they must be slipped over the open end of the wire. These non-adhesive markers provide flexibility as they can be moved prior to being heat-shrunk. Once shrunk, these markers fit snugly around wires for permanent identification which will stand up to harsh environments.

### 2. What size of wire are you marking?


The diameter of the wire determines the size of the sleeve or the height of the label to be used.

### 3. Will you print your own markers or purchase preprinted ones?

Pre-printed markers are available in a large variety of stock legends, and custom legends are available for any large jobs. These markers come in a variety of packaging and formats for ease of use and ease of transport. They are ideal for any application. Printable markers are meant to be printed with variable legends as needed. Various methods for this include: portable wire marking printers or computer software linked to thermal transfer, dot matrix or laser-printers. An extensive array of sizes are available for every application. These printable markers offer the flexibility of printing legends on demand. They are also ideal for applications that require long legends.

### 4. In what type of environment will these wire markers be placed?

It is extremely important to select a wire marker material that will last for your application. Too many companies go to the trouble of marking only to have to do it all again because they did not select the correct material. Be sure to ask yourself these questions before you select your wire marker.

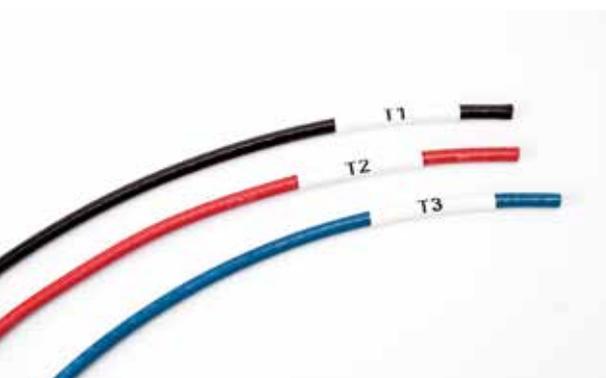

## How to select a marker size

Brady offers a variety of marker sizes for your wire marking needs. Please view the chart listed below to assist you in choosing the minimum recommended flattened sleeve height for the wire or cable that you are identifying.

Order Reference	Label Height B (mm)	Max. Wire Diameter (mm)	Min. Wire Diameter (mm)
<b>B-342 Heat-shrink Polyolefin Sleeve</b>			
094	4.62	2.03	0.58
125	5.97	2.79	1.17
187	8.51	3.81	1.57
250	11.15	5.46	2.39
375	16.38	8.13	3.18
500	21.62	11.43	4.75
750	31.75	17.78	6.35
1000	42.16	24.13	9.53
1500	61.80	36.83	12.70
<b>B-345 High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve</b>			
094	4.62	2.03	0.80
125	5.97	2.79	1.57
187	8.51	3.81	2.39
250	11.15	5.46	3.18
375	16.38	8.13	4.75
500	21.62	11.43	6.35
750	31.75	17.78	9.53
1000	42.16	24.13	11.40
1500	61.80	36.83	19.05
<b>B-7641 Heat-shrink Polyolefin Sleeve</b>			
094	4.62	2.03	1.19
125	5.97	2.79	1.57
187	8.51	3.81	2.39
250	11.15	5.46	3.18
375	16.38	8.13	4.78
500	21.62	11.43	6.35
750	31.75	17.78	9.53
1000	42.16	24.13	12.70
1500	61.80	36.83	19.05
2000	80.39	49.53	25.40
<b>B-7642 Heat-shrink Polyolefin Sleeve</b>			
094	4.62	2.03	1.19
125	5.97	2.79	1.57
187	8.51	3.81	2.39
250	11.15	5.46	3.18
375	16.38	8.13	4.78
500	21.62	11.43	6.35
750	31.75	17.78	9.53
1000	42.16	24.13	12.70
1500	61.80	36.83	19.05
2000	80.39	49.53	25.40


## B-345 PermaSleeve HT high temperature PVDF wire marking sleeves

High temperature, low outgassing. 2:1 Shrink Ratio

- A 2:1 shrink ratio wire marker sleeve specifically designed for high temperature and low vacuum outgassing applications
- Made from irradiated high-temp Polyvinylidene Fluoride (PVDF) heat shrink tubing
- Fade-resistant and flame-retardant



Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-345: High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve							
V	B33D-125-2-345	White	50.80	5.97	12.70	1000	B30-R6000HF
V	B33D-187-2-345	White	50.80	8.51	15.88	750	B30-R6000HF
V	B33D-250-2-345	White	50.80	11.15	19.05	500	B30-R6000HF
V	B33D-375-2-345	White	50.80	16.38	25.40	500	B30-R6000HF
V	B33D-500-2-345	White	50.80	21.62	31.75	350	B30-R6000HF
V	B33D-750-2-345	White	50.80	31.75	41.28	250	B30-R6000HF
V	B33D-94-2-345	White	50.80	4.62	12.70	1000	B30-R6000HF



### How to read your PermaSleeve order reference

Example order reference:

**B33D - 187 - 2 - BK - 4**  
 Product      Diameter      Width      Colour      Pieces  
 Optional

Product type
B33 = Single-sided Printing
B33D = Double-sided Printing

Sleeve width
2 = 50.80mm

Sleeve diameter
094 = 3/32" size fits wire diameter 0.58mm - 2.03mm
125 = 1/8" size fits wire diameter 1.17mm - 2.79mm
187 = 3/16" size fits wire diameter 1.57mm - 3.81mm
250 = 1/4" size fits wire diameter 2.39mm - 5.46mm
375 = 3/8" size fits wire diameter 3.18mm - 8.13mm
500 = 1/2" size fits wire diameter 4.75mm - 11.43mm
750 = 3/4" size fits wire diameter 6.35mm - 17.78mm
1000 = 1" size fits wire diameter 9.53mm - 24.13mm
1500 = 1 1/2" size fits wire diameter 12.7mm - 36.83mm

Sleeve Colour
BK = Black      WT = White      YL = Yellow

**Optional: Pieces per sleeve**  
 While 1 marker per sleeve is standard, the sleeve can be split into multiple pieces.  
 Example: B33-1500-2-342-2 This "2" means that this 50.80mm sleeve is slit into two 25.40mm pieces



## B-342 PermaSleeve PS polyolefin wire marking sleeves

Standard military/industrial grade. 3:1 Shrink ratio

- A 3:1 heat shrinkable wire marker sleeve that fits snugly around wires
- Can be used for identification or wire protection
- Fade-resistant and flame-retardant





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-342: Heat-shrink Polyolefin							
V	B33-1000-2-342	White	50.80	42.16	50.80	250	B30-R4300
V	B33-1000-2-342YL	Yellow	50.80	42.16	50.80	250	B30-R4300
V	B33-125-2-342	White	50.80	5.97	12.70	1000	B30-R4300
V	B33-125-2-342-2	White	25.40	5.97	12.70	2000	B30-R4300
V	B33-125-2-342YL	Yellow	50.80	5.97	12.70	1000	B30-R4300
V	B33-125-2-342YL-2	Yellow	25.40	5.97	12.70	2000	B30-R4300
V	B33-1500-2-342	White	50.80	61.80	76.20	150	B30-R4300
V	B33-1500-2-342BK	Black	50.80	61.80	76.20	150	B30-R4500-SV
V	B33-1500-2-342YL	Yellow	50.80	61.80	76.20	150	B30-R4300
V	B33-1500-2-342YL-2	Yellow	25.40	61.80	76.20	300	B30-R4300
V	B33-187-2-342	White	50.80	8.51	15.88	750	B30-R4300
V	B33-187-2-342-2	White	25.40	8.51	15.88	1500	B30-R4300
V	B33-187-2-342YL	Yellow	50.80	8.51	15.88	750	B30-R4300
V	B33-250-2-342	White	50.80	11.15	19.05	500	B30-R4300
V	B33-250-2-342-2	White	25.40	11.15	19.05	1000	B30-R4300
V	B33-250-2-342YL	Yellow	50.80	11.15	19.05	500	B30-R4300
V	B33-375-2-342	White	50.80	16.38	25.40	500	B30-R4300
V	B33-375-2-342-2	White	25.40	16.38	25.40	1000	B30-R4300
V	B33-375-2-342YL	Yellow	50.80	16.38	25.40	500	B30-R4300
V	B33-500-2-342	White	50.80	21.62	31.75	350	B30-R4300
V	B33-500-2-342-2	White	25.40	21.62	31.75	700	B30-R4300
V	B33-500-2-342YL	Yellow	50.80	21.62	31.75	350	B30-R4300
V	B33-500-2-342YL-2	Yellow	25.40	21.62	31.75	700	B30-R4300
V	B33-750-2-342	White	50.80	31.75	41.28	250	B30-R4300
V	B33-750-2-342YL	Yellow	50.80	31.75	41.28	250	B30-R4300
V	B33-94-2-342	White	50.80	4.62	12.70	1000	B30-R4300
V	B33-94-2-342-2	White	25.40	4.62	12.70	2000	B30-R4300
V	B33-94-2-342YL	Yellow	50.80	4.62	12.70	1000	B30-R4300
V	B33-94-2-342YL-2	Yellow	25.40	4.62	12.70	2000	B30-R4300
V	B33D-1000-2-342BK	Black	50.80	42.16	50.80	250	B30-R4500-SV
V	B33D-1000-2-342YL	Yellow	50.80	42.16	50.80	250	B30-R4300
V	B33D-125-2-342	White	50.80	5.97	12.70	1000	B30-R4300
V	B33D-125-2-342BK	Black	50.80	5.97	12.70	1000	B30-R4500-SV
V	B33D-125-2-342YL	Yellow	50.80	5.97	12.70	1000	B30-R4300
V	B33D-1500-2-342	White	50.80	61.80	76.20	150	B30-R4300
V	B33D-1500-2-342BK	Black	50.80	61.80	76.20	150	B30-R4500-SV
V	B33D-1500-2-342YL	Yellow	50.80	61.80	76.20	150	B30-R4300
V	B33D-187-2-342	White	50.80	8.51	15.88	750	B30-R4300
V	B33D-187-2-342BK	Black	50.80	8.51	15.88	750	B30-R4500-SV
V	B33D-187-2-342YL	Yellow	50.80	8.51	15.88	750	B30-R4300
V	B33D-250-2-342	White	50.80	11.15	19.05	500	B30-R4300
V	B33D-250-2-342YL	Yellow	50.80	11.15	19.05	500	B30-R4300
V	B33D-375-2-342	White	50.80	16.38	25.40	500	B30-R4300
V	B33D-375-2-342YL	Yellow	50.80	16.38	25.40	500	B30-R4300
V	B33D-500-2-342	White	50.80	21.62	31.75	350	B30-R4300
V	B33D-500-2-342YL	Yellow	50.80	21.62	31.75	350	B30-R4300
V	B33D-750-2-342	White	50.80	31.75	41.28	250	B30-R4300

>>

## B-342 PermaSleeve PS polyolefin wire marking sleeves (Continued)

Standard military/industrial grade. 3:1 Shrink ratio

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
V	B33D-750-2-342BK	Black	50.80	31.75	41.28	250	B30-R4500-SV
V	B33D-750-2-342YL	Yellow	50.80	31.75	41.28	250	B30-R4300
V	B33D-94-2-342	White	50.80	4.62	12.70	1000	B30-R4300
V	B33D-94-2-342BK	Black	50.80	4.62	12.70	1000	B30-R4500-SV
V	B33D-94-2-342YL	Yellow	50.80	4.62	12.70	1000	B30-R4300




## B-7641 PermaSleeve low smoke zero halogen wire marking sleeves

Permanent heat shrink wire identification

- A 2:1 double-sided printable heat-shrink Polyolefin wire marker sleeve designed for wire identification and insulation purposes
- Contains no added halogens, offers excellent flame retardant characteristics combined with minimal smoke emission

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7641: Heat-shrink Polyolefin							
V	B33D-1000-2-7641Y	Yellow	50.80	42.16	50.80	150	B30-R6600
V	B33D-125-2-7641	White	50.80	5.97	12.70	500	B30-R6600
V	B33D-125-2-7641Y	Yellow	50.80	5.97	12.70	500	B30-R6600
V	B33D-1500-2-7641	White	50.80	61.80	76.20	50	B30-R6600
V	B33D-1500-2-7641Y	Yellow	50.80	61.80	76.20	50	B30-R6600
V	B33D-187-2-7641	White	50.80	8.51	15.88	450	B30-R6600
V	B33D-187-2-7641Y	Yellow	50.80	8.51	15.88	450	B30-R6600
V	B33D-250-2-7641	White	50.80	11.15	19.05	400	B30-R6600
V	B33D-250-2-7641Y	Yellow	50.80	11.15	19.05	400	B30-R6600
V	B33D-375-2-7641	White	50.80	16.38	25.40	250	B30-R6600
V	B33D-375-2-7641Y	Yellow	50.80	16.38	25.40	250	B30-R6600
V	B33D-500-2-7641	White	50.80	21.62	31.75	225	B30-R6600
V	B33D-500-2-7641Y	Yellow	50.80	21.62	31.75	225	B30-R6600
V	B33D-750-2-7641Y	Yellow	50.80	31.75	41.28	150	B30-R6600
V	B33D-94-2-7641	White	50.80	4.62	12.70	500	B30-R6600



### 2-pass double-side sleeve printing with no wasted sleeves using i5300 printer and Brady Workstation

- Use double-sided sleeve module in Brady workstation
- Change text content, size and even rotation for each side!
- See a demo at [Bradyeurope.com](http://Bradyeurope.com)





## B-7642 PermaSleeve HX polyolefin wire marking sleeves

Military/Industrial grade. 2:1 Shrink ratio

- A 2:1 heat shrinkable wire marker sleeve that fits snugly around wires
- Flame-retardant and high-temp rated but not as high temp as B-345 "HT" Sleeves





Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7642: Heat-shrink Polyolefin							
V	B33-1000-2-7642	White	50.80	42.16	50.80	150	B30-R4300
V	B33-125-2-7642	White	50.80	5.97	12.70	500	B30-R4300
V	B33-1500-2-7642	White	50.80	61.80	76.20	50	B30-R4300
V	B33-187-2-7642	White	50.80	8.51	15.88	450	B30-R4300
V	B33-250-2-7642	White	50.80	11.15	19.05	400	B30-R4300
V	B33-94-2-7642	White	50.80	4.62	12.70	500	B30-R4300
V	B33D-1000-2-7642	White	50.80	42.16	50.80	150	B30-R4300
V	B33D-125-2-7642	White	50.80	5.97	12.70	500	B30-R4300
V	B33D-1500-2-7642	White	50.80	61.80	76.20	50	B30-R4300
V	B33D-250-2-7642	White	50.80	11.15	19.05	400	B30-R4300
V	B33D-375-2-7642	White	50.80	16.38	25.40	250	B30-R4300
V	B33D-500-2-7642	White	50.80	21.62	31.75	225	B30-R4300
V	B33D-750-2-7642	White	50.80	31.75	41.28	150	B30-R4300
V	B33D-94-2-7642	White	50.80	4.62	12.70	500	B30-R4300

## QuickSleeve Handheld Sleeve Applicator

The QuickSleeve Handheld Sleeve Applicator is an intuitive multi-tool designed to help you quickly apply sleeves on to wires in three simple steps, just pick, slip and apply. This tool includes:

- Four specially designed slanted tubes sized for sleeve sizes 0.094, 0.125, 0.187 and 0.250 inches
- Built-in LED flashlight for use in low-lit conditions
- Terminal block sized screwdriver"

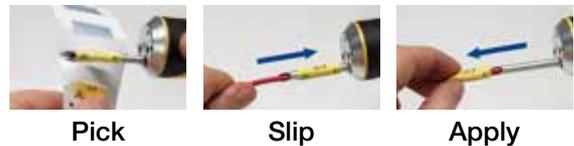

Pick

Slip

Apply



## B-7697 Rigid DuraSleeve wire marking inserts

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-7697: Polyester							
≡	B33-10x4.4-7697-WT	White	10.00	4.40	11.46	2500	R4300 R6200
≡	B33-12x4.4-7697-WT	White	12.00	4.40	11.46	2500	R4300 R6200
≡	B33-16x4.4-7697-WT	White	16.00	4.40	11.46	2500	R4300 R6200
≡	B33-23x4.4-7697-WT	White	23.00	4.40	11.46	2500	R4300 R6200
≡	B33-30x4.4-7697-WT	White	30.63	4.40	11.46	2500	R4300 R6200



DuraSleeve tag carriers are produced in transparent PVC. The special shape of the carrier allows it to adapt to cables of various diameters. There are several sizes of carriers which cater for cables with external diameters from 1.30 mm up to 15 mm.

- Temperature range: -40 °C to 60 °C
- Material: PVC

Please contact your local Brady representative to identify and select the most appropriate carrier for your individual application.



## Pre-printed Pre-cut blank sign headers

For creating Arc Flash and safety warning labels in seconds

- Allows the printer to create multi-colour signs fast - in a single print pass
- B-595 Indoor/Outdoor grade material conforms to rough, irregular and “difficult to adhere to” surfaces
- B-483 uses an aggressive adhesive specifically designed for powder coated surfaces



Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-483A: Polyester</b>							
⊗	B33-184-483-ANSIWA	<b>WARNING</b>	76.20	76.20	82.55	500	B30 Monocolour Series
⊗	B33-184-483-ANSIDA	<b>DANGER</b>	76.20	76.20	82.55	500	B30 Monocolour Series
⊗	B33-161-483-ANSIDA	<b>DANGER</b>	101.60	101.60	107.95	370	B30 Monocolour Series
⊗	B33-161-483-ANSIWA	<b>WARNING</b>	101.60	101.60	107.95	370	B30 Monocolour Series
<b>B-595: Vinyl</b>							
▲	B30-242-595-BLNKWT		28.58	72.39	82.55	300	B30-R10000
⊗	B30-241-595-ANSIDA	<b>DANGER</b>	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSICA	<b>CAUTION</b>	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSIWA	<b>WARNING</b>	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-ANSINO	<b>NOTICE</b>	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-OSHADA	<b>DANGER</b>	76.20	57.15	82.55	300	B30-R10000
⊗	B30-241-595-OSHACA*	<b>CAUTION</b>	76.20	57.15	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT		76.20	57.15	82.55	300	B30-R10000
▲	B30-241-595-BLNKYL		76.20	57.15	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT		97.79	57.15	107.95	250	B30-R10000
⊗	B30-25-595-ANSIDA	<b>DANGER</b>	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSICA	<b>CAUTION</b>	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSIWA	<b>WARNING</b>	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-ANSINO	<b>NOTICE</b>	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-OSHADA	<b>DANGER</b>	152.40	101.60	158.75	175	B30-R10000
⊗	B30-25-595-OSHACA*	<b>CAUTION</b>	152.40	101.60	158.75	175	B30-R10000
▲	B30-25-595-BLNKWT		152.40	101.60	158.75	175	B30-R10000
▲	B30-25-595-BLNKYL		152.40	101.60	158.75	175	B30-R10000





## B-551 Non-adhesive pre-printed & pre-cut safety tags

Pre-printed and pre-cut to save you time

- Non-adhesive semi-rigid polyester card stock
  - Tags are pre-cut with hole and chamfered corners
  - Perforated between tags
  - Snap-in plastic grommets available for extra strength around mounting hole.
- Order reference: 020596




Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-551: Polyester							
☒	B30-255-551-ANSIDA	<b>⚠ DANGER</b>	82.55	146.05	158.75	100	B30-R10000
☒	B30-255-551-OSHADA	<b>⚠ DANGER</b>	82.55	146.05	158.75	100	B30-R10000
☒	B30-255-551-ANSICA	<b>⚠ CAUTION</b>	82.55	146.05	158.75	100	B30-R10000



## B-595 High performance indoor/outdoor vinyl

For general facility and safety identification: our best industrial vinyl yet

- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- Adheres to “difficult low-surface energy items (PVC piping, blow-moulded equipment cases, ABS plastics, recycled plastics)




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl						
∞	B30C-500-595-BK	Black	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-BL	Blue	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-BR	Brown	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-GD	Gold	12.70	30.48	1	B30-R10000
∞	B30C-500-595-GN	Green	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-GY	Grey	12.70	30.48	1	B30-R10000
∞	B30C-500-595-OR	Orange	12.70	30.48	1	B30-R10000
∞	B30C-500-595-PL	Purple	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-RD	Red	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-595-CL	Transparent	12.70	30.48	1	B30-R10000
∞	B30C-500-595-WT	White	12.70	30.48	1	B30-R10000
∞	B30C-500-595-YL	Yellow	12.70	30.48	1	B30-R10000
∞	B30C-1125-595-BK	Black	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-BL	Blue	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-BR	Brown	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-GD	Gold	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-GN	Green	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-GY	Grey	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-OC	Ochre	28.58	30.48	1	B30-R60000C
∞	B30C-1125-595-OR	Orange	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-PL	Purple	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-RD	Red	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-595-CL	Transparent	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-WT	White	28.58	30.48	1	B30-R10000
∞	B30C-1125-595-YL	Yellow	28.58	30.48	1	B30-R10000
∞	B30C-2250-595-BK	Black	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-BL	Blue	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-BR	Brown	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-GD	Gold	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-GN	Green	57.15	30.48	1	B30-R10000-WT

>>

## B-595 High performance indoor/outdoor vinyl (Continued)

For general facility and safety identification: our best industrial vinyl yet




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
∞	B30C-2250-595-GY	Grey	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-OC	Ochre	57.15	30.48	1	B30-R60000C
∞	B30C-2250-595-OR	Orange	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-PL	Purple	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-RD	Red	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-595-CL	Transparent	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-595-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-3000-595-WT	White	76.20	30.48	1	B30-R10000
∞	B30C-3000-595-YL	Yellow	76.20	30.48	1	B30-R10000
∞	B30C-4000-595-BK	Black	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-BL	Blue	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-BR	Brown	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-GD	Gold	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-GN	Green	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-GY	Grey	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-OC	Ochre	101.60	30.48	1	B30-R60000C
∞	B30C-4000-595-OR	Orange	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-PL	Purple	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-RD	Red	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-595-CL	Transparent	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-595-YL	Yellow	101.60	30.48	1	B30-R10000

## B-569 High performance polyester

For labelling stainless steel and smooth surfaces

- Low-halide content for labelling stainless steel pipes and surfaces
- Applies best to very smooth surfaces and ideal for mounting to rigid panels




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-569: Polyester						
∞	B30C-500-569-BK	Black	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-BL	Blue	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-BR	Brown	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-GN	Green	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-GY	Grey	12.70	30.48	1	B30-R10000
∞	B30C-500-569-LB	Light Blue	12.70	30.48	1	B30-R10000
∞	B30C-500-569-OC	Ochre	12.70	30.48	1	B30-R10000
∞	B30C-500-569-OR	Orange	12.70	30.48	1	B30-R10000
∞	B30C-500-569-PK	Pink	12.70	30.48	1	B30-R10000
∞	B30C-500-569-PL	Purple	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-RD	Red	12.70	30.48	1	B30-R10000-WT
∞	B30C-500-569-SB	Sky Blue	12.70	30.48	1	B30-R10000
∞	B30C-500-569-TN	Tan	12.70	30.48	1	B30-R10000
∞	B30C-500-569-CL	Transparent	12.70	30.48	1	B30-R10000
∞	B30C-500-569-WT	White	12.70	30.48	1	B30-R10000
∞	B30C-500-569-YL	Yellow	12.70	30.48	1	B30-R10000
∞	B30C-1125-569-BK	Black	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-BL	Blue	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-BR	Brown	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-GN	Green	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-GY	Grey	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-LB	Light Blue	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-OC	Ochre	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-OR	Orange	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-PK	Pink	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-PL	Purple	28.58	30.48	1	B30-R10000-WT
∞	B30C-1125-569-RD	Red	28.58	30.48	1	B30-R10000-WT

>>

## B-569 High performance polyester (Continued)

For labelling stainless steel and smooth surfaces




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
∞	B30C-1125-569-SB	Sky Blue	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-TN	Tan	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-CL	Transparent	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-WT	White	28.58	30.48	1	B30-R10000
∞	B30C-1125-569-YL	Yellow	28.58	30.48	1	B30-R10000
∞	B30C-2250-569-BK	Black	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-BL	Blue	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-BR	Brown	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-GN	Green	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-GY	Grey	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-LB	Light Blue	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-OC	Ochre	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-OR	Orange	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-PK	Pink	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-PL	Purple	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-RD	Red	57.15	30.48	1	B30-R10000-WT
∞	B30C-2250-569-SB	Sky Blue	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-TN	Tan	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-CL	Transparent	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-569-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-3000-569-WT	White	76.20	30.48	1	B30-R10000
∞	B30C-4000-569-BK	Black	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-BL	Blue	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-BR	Brown	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-GN	Green	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-GY	Grey	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-LB	Light Blue	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-OC	Ochre	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-OR	Orange	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-PK	Pink	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-PL	Purple	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-RD	Red	101.60	30.48	1	B30-R10000-WT
∞	B30C-4000-569-SB	Sky Blue	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-TN	Tan	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-CL	Transparent	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-569-YL	Yellow	101.60	30.48	1	B30-R10000

## B-595 Pre-printed right-to-know chemical labels

For quickly creating NFPA and colour bar labels

- Allows the printer to produce 5 colour chemical labels in a single print pass
- Indoor/Outdoor grade material withstands exposure to moisture, chemicals and handling





Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B30-244-595-CB		57.15	57.15	1	365	B30-R10000
▲	B30-244-595-NFPA		57.15	57.15	1	365	B30-R10000
▲	B30-244-595-DIAM		57.15	57.15	1	365	B30-R10000

>>

## B-595 Pre-printed right-to-know chemical labels (Continued)

For quickly creating NFPA and colour bar labels

Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B30-244-595-HMIG		57.15	57.15	1	365	B30-R10000
▲	B30-246-595-HMIG		76.20	28.58	1	300	B30-R10000
▲	B30-246-595-NFR		76.20	28.58	1	300	B30-R10000
▲	B30-245-595-CB		101.60	57.15	1	240	B30-R10000
▲	B30-245-595-NFPA		101.60	57.15	1	240	B30-R10000
▲	B30-161-595-NFPA		101.60	101.60	1	240	B30-R10000
▲	B30-263-595-NFPA		158.75	101.60	1	170	B30-R10000
▲	B30-263-595-CB		158.75	101.60	1	170	B30-R10000




## B-7569 Pre-printed CLP/GHS chemical labels

Print 2 colour CLP/GHS labels in one fast print pass

- Blank labels with pre-printed red diamonds allow printer to produce 2 colour CLP/GHS labels in one print pass
- 3 sizes of labels, each with 6 diamond layouts that match templates in Workstation software
- Indoor/outdoor vinyl material withstands exposure to moisture, chemicals and handling

Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B30-260-7569-CLP1		85.00	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP2		84.99	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP3A		84.99	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP3B		84.99	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP4A		84.99	55.00	1	340	B30-R10000
▲	B30-260-7569-CLP4B		84.99	55.00	1	340	B30-R10000
▲	B30-261-7569-CLP1		110.01	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP2		110.01	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP3A		110.01	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP3B		110.01	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP4A		110.01	75.00	1	270	B30-R10000
▲	B30-261-7569-CLP4B		110.01	75.00	1	270	B30-R10000
▲	B30-262-7569-CLP1		154.99	104.98	1	200	B30-R10000
▲	B30-262-7569-CLP2		154.99	104.98	1	200	B30-R10000



>>

## B-7569 Pre-printed CLP/GHS chemical labels (Continued)

Print 2 colour CLP/GHS labels in one fast print pass




Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Labels per Row	Labels per Roll	Printer Ribbon Series
▲	B30-262-7569-CLP3A		154.99	104.98	1	200	B30-R10000
▲	B30-262-7569-CLP3B		154.99	104.98	1	200	B30-R10000
▲	B30-262-7569-CLP4A		154.99	104.98	1	200	B30-R10000
▲	B30-262-7569-CLP4B		154.99	104.98	1	200	B30-R10000
▲	B30-18-7569-CLP4C		76.20	25.40	1	1000	B30-R10000

### ► Facility and safety applications:

5S Labels, pipe markers, safety & warning labels, equipment & panel labels, arc flash & chemical labels and more!



## LabelMark Upgrade Suite

Easily recreate all LabelMark functionalities with upgraded features in Brady Workstation. For more information about the Brady Workstation Software Suites, see page 66.



## B-854 and B-855 ToughWash washdown resistant labels

Withstands pressures of high heat, harsh chemicals and numerous washdown cycles

- Ideal for use in the Food & Beverage industry
- Legible and long-lasting for even the toughest washdown cycles
- B-854 offers metal detectable layer to detect foreign debris in food stream







Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
<b>B-854: Metal Detectable Polyester</b>							
∞	B30C-4000-854-YL		101.60	-	-	1	B30-R6000HF
∞	B30C-4000-854-WT		101.60	-	-	1	B30-R6000HF
⊗	B30-25-854-WARN		101.60	152.40	158.75	100	B30-R6000HF
⊗	B30-25-854-DANG		101.60	152.40	158.75	100	B30-R6000HF
⊗	B30-25-854-CAUT		101.60	152.40	158.75	100	B30-R6000HF
<b>B-855: Polyester</b>							
∞	B30C-1125-855-YL		28.58	-	-	1	B30-R6000HF
∞	B30C-1125-855-WT		28.58	-	-	1	B30-R6000HF

>>

## B-854 and B-855 ToughWash washdown resistant labels (Continued)

Withstands pressures of high heat, harsh chemicals and numerous washdown cycles

Diagram	Order Reference		Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
∞	B30C-2250-855-YL		57.15	-	-	1	B30-R6000HF
∞	B30C-2250-855-WT		57.15	-	-	1	B30-R6000HF
∞	B30C-4000-855-YL		101.60	-	-	1	B30-R6000HF
∞	B30C-4000-855-WT		101.60	-	-	1	B30-R6000HF
⊗	B30-25-855-WARN		101.60	152.40	158.75	100	B30-R6000HF
⊗	B30-25-855-DANG		101.60	152.40	158.75	100	B30-R6000HF
⊗	B30-25-855-CAUT		101.60	152.40	158.75	100	B30-R6000HF




## B-595 and B-7569 Pre-cut Blank labels

For general purpose, peel-off-and-apply identification

- Ideal for a wide range of labelling applications
- Includes two sizes that are pre-cut and pre-sized to fit heavy-duty rigid tags
- Indoor/Outdoor grade material

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-595: Vinyl							
▲	B30-242-595-BLNKWT	White	28.58	72.39	82.55	300	B30-R10000
▲	B30-241-595-BLNKWT	White	76.20	57.15	82.55	300	B30-R10000
▲	B30-241-595-BLNKYL	Yellow	76.20	57.15	82.55	300	B30-R10000
▲	B30-219-595-BLNKWT	White	97.79	57.15	107.95	250	B30-R10000
▲	B30-25-595-BLNKWT	White	152.40	101.60	158.75	175	B30-R10000
▲	B30-25-595-BLNKYL	Yellow	152.40	101.60	158.75	175	B30-R10000
B-7569: Vinyl							
▲	B30-242-7569-WT	White	28.58	72.00	82.55	300	B30-R10000
▲	B30-241-7569-WT	White	57.00	75.00	82.55	300	B30-R10000
▲	B30-219-7569-WT	White	57.00	98.00	107.95	250	B30-R10000
▲	B30-241-7569-YL	Yellow	57.00	75.00	82.55	300	B30-R10000
▲	B30-25-7569-WT	White	101.00	152.00	158.75	175	B30-R10000
▲	B30-25-7569-YL	Yellow	101.00	152.00	158.75	175	B30-R10000




## B-551 Non-adhesive continuous tag stock

For safety, lockout and general purpose hanging tags

- Non-adhesive, polyester stock
- Hole punch available separately. Order reference: 020591
- Optional snap-in grommets available. Order Reference: 020596

Diagram	Order Reference	Colour	Label Width A (mm)	Label Height B (mm)	Label Length B (m)	Vertical Repeat D (mm)	Labels per Roll	Printer Ribbon Series
B-551: Polyester								
🔒	B30-255-551-WT	White	82.55	146.05	-	158.75	100	B30-R10000
∞	B30C-2500-551-WT	White	63.50	-	15.24	-	1	B30-R10000
∞	B30C-3250-551-WT	White	82.55	-	15.24	-	1	B30-R10000
∞	B30C-4250-551-WT	White	107.95	-	15.24	-	1	B30-R10000





## B-584 Retro reflective tape

For Highly reflective identification that shines back brightly when struck by light

- Ideal for labelling outdoor utility poles and pedestals, jobsite equipment and roof-top equipment
- Recommended low light or inclement weather conditions




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-584: Reflective Tape						
∞	B30C-1125-584-OR	Orange	28.58	15.24	1	B30-R10000
∞	B30C-1125-584-SL	Silver	28.58	15.24	1	B30-R10000
∞	B30C-1125-584-YL	Yellow	28.58	15.24	1	B30-R10000
∞	B30C-2250-584-OR	Orange	57.15	15.24	1	B30-R10000
∞	B30C-2250-584-SL	Silver	57.15	15.24	1	B30-R10000
∞	B30C-2250-584-YL	Yellow	57.15	15.24	1	B30-R10000
∞	B30C-4000-584-OR	Orange	101.60	15.24	1	B30-R10000
∞	B30C-4000-584-SL	Silver	101.60	15.24	1	B30-R10000
∞	B30C-4000-584-YL	Yellow	101.60	15.24	1	B30-R10000



## B-526 BradyGlo High-intensity photoluminescent tape

For glow-in-the dark identification - Up to 10 hours

- Designed for directional and evacuation marking
- Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-526: Phosphorescent Polyester						
∞	B30C-1125-526	Photoluminescent Green	28.58	15.24	1	B30-R10000
∞	B30C-2250-526	Photoluminescent Green	57.15	15.24	1	B30-R10000
∞	B30C-4000-526	Photoluminescent Green	101.60	15.24	1	B30-R10000



## B-581 Repositionable vinyl

For 5S and lean applications

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, like 5S and lean inventory labels
- Service temp: -40 °C to 82 °C
- Application temp: 10 °C to 82 °C




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-581: Vinyl						
∞	B30C-500-581-WT	White	12.70	30.48	1	B30-R10000
∞	B30C-500-581-YL	Yellow	12.70	30.48	1	B30-R10000
∞	B30C-1125-581-WT	White	28.58	30.48	1	B30-R10000
∞	B30C-1125-581-YL	Yellow	28.58	30.48	1	B30-R10000
∞	B30C-2250-581-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-581-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-4000-581-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-581-YL	Yellow	101.60	30.48	1	B30-R10000

## B-509 Printable magnetic supply

Easiest and quickest material for removing and repositioning

- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable and repositionable identification applications




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-509: Magnetic Polyester						
∞	B30C-2500-509-WT	White	63.50	7.62	1	B30-R10000
∞	B30C-2500-509-YL	Yellow	63.50	7.62	1	B30-R10000
∞	B30C-4250-509-WT	White	107.95	7.62	1	B30-R10000
∞	B30C-4250-509-YL	Yellow	107.95	7.62	1	B30-R10000

## B-787 Polyvinyl fluoride tape

Ideal for applications where self-extinguishing properties are required

Polyvinyl fluoride (B-787) tape is ideal for label applications where self-extinguishing properties are required. Glossy white topcoated material with permanent acrylic adhesive. Meets the colour requirements of FED-STD-595C Colour 17875 White and complies with the requirements of Boeing BMS 10-26 Type I, Grade A.




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-787: Polyvinyl fluoride						
⊙	B30C-4000-787	White	101.60	18.29	1	B30-R6000HF

## Toughstripe floor marking tape

Removable area marking tape

ToughStripe is the ideal floor marking tape in a lean environment where the regular application and replacement of floor marking is crucial.




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-483A/B-634: Polyester with Polyester Overlaminated						
∞	B30C-1125-483BK-KT	Black	28.58	30.48	1	B30-R4400
∞	B30C-1125-483BL-KT	Blue	28.58	30.48	1	B30-R4400
∞	B30C-1125-483GN-KT	Green	28.58	30.48	1	B30-R4400
∞	B30C-1125-483OR-KT	Orange	28.58	30.48	1	B30-R6000HF
∞	B30C-1125-483RD-KT	Red	28.58	30.48	1	B30-R4400
∞	B30C-1125-483WT-KT	White	28.58	30.48	1	B30-R6000HF
∞	B30C-1125-483YL-KT	Yellow	28.58	30.48	1	B30-R6000HF
∞	B30C-2250-483BK-KT	Black	57.15	30.48	1	B30-R4400
∞	B30C-2250-483BL-KT	Blue	57.15	30.48	1	B30-R4400
∞	B30C-2250-483GN-KT	Green	57.15	30.48	1	B30-R4400
∞	B30C-2250-483OR-KT	Orange	57.15	30.48	1	B30-R6000HF
∞	B30C-2250-483RD-KT	Red	57.15	30.48	1	B30-R4400
∞	B30C-2250-483WT-KT	White	57.15	30.48	1	B30-R6000HF
∞	B30C-2250-483YL-KT	Yellow	57.15	30.48	1	B30-R6000HF
∞	B30C-3000-483WT-KT	White	76.20	30.48	1	B30-R6000HF
∞	B30C-3000-483YL-KT	Yellow	76.20	30.48	1	B30-R6000HF
∞	B30C-4000-483BK-KT	Black	101.60	30.48	1	B30-R4400
∞	B30C-4000-483BL-KT	Blue	101.60	30.48	1	B30-R4400
∞	B30C-4000-483GN-KT	Green	101.60	30.48	1	B30-R4400
∞	B30C-4000-483OR-KT	Orange	101.60	30.48	1	B30-R6000HF
∞	B30C-4000-483RD-KT	Red	101.60	30.48	1	B30-R4400
∞	B30C-4000-483WT-KT	White	101.60	30.48	1	B30-R6000HF
∞	B30C-4000-483YL-KT	Yellow	101.60	30.48	1	B30-R6000HF

- Superior durability
- Easy application
- High visibility
- Die-Cut shapes
- Painless Removal



## B-7569 Indoor/Outdoor vinyl

General purpose industrial vinyl for indoor/outdoor usage

- High gloss, durable and flexible identification material
- Adheres to difficult low surface energy materials
- Can handle up to 75°C, which meets industry maintenance temperatures
- Low-shrink vinyl




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-7569: Vinyl						
∞	B30C-500-7569-BK	Black	12.70	30.00	1	B30-R10000-WT
∞	B30C-500-7569-BL	Blue	12.70	30.00	1	B30-R10000-WT
∞	B30C-500-7569-GN	Green	12.70	30.00	1	B30-R10000-WT
∞	B30C-500-7569-OR	Orange	12.70	30.00	1	B30-R10000
∞	B30C-500-7569-RD	Red	12.70	30.00	1	B30-R10000-WT
∞	B30C-500-7569-WT	White	12.70	30.00	1	B30-R10000
∞	B30C-500-7569-YL	Yellow	12.70	30.00	1	B30-R10000
∞	B30C-1125-7569-BK	Black	29.00	30.00	1	B30-R10000-WT
∞	B30C-1125-7569-BL	Blue	29.00	30.00	1	B30-R10000-WT
∞	B30C-1125-7569-GN	Green	29.00	30.00	1	B30-R10000-WT
∞	B30C-1125-7569-OR	Orange	29.00	30.00	1	B30-R10000
∞	B30C-1125-7569-RD	Red	29.00	30.00	1	B30-R10000-WT
∞	B30C-1125-7569-WT	White	29.00	30.00	1	B30-R10000
∞	B30C-1125-7569-YL	Yellow	29.00	30.00	1	B30-R10000
∞	B30C-2250-7569-BK	Black	57.00	30.00	1	B30-R10000-WT
∞	B30C-2250-7569-BL	Blue	57.00	30.00	1	B30-R10000-WT
∞	B30C-2250-7569-GN	Green	57.00	30.00	1	B30-R10000-WT
∞	B30C-2250-7569-OR	Orange	57.00	30.00	1	B30-R10000
∞	B30C-2250-7569-RD	Red	57.00	30.00	1	B30-R10000-WT
∞	B30C-2250-7569-WT	White	57.00	30.00	1	B30-R10000
∞	B30C-2250-7569-YL	Yellow	57.00	30.00	1	B30-R10000
∞	B30C-3000-7569-WT	White	75.00	30.00	1	B30-R10000
∞	B30C-3000-7569-YL	Yellow	75.00	30.00	1	B30-R10000
∞	B30C-4000-7569-BK	Black	101.00	30.00	1	B30-R10000-WT
∞	B30C-4000-7569-BL	Blue	101.00	30.00	1	B30-R10000-WT
∞	B30C-4000-7569-GN	Green	101.00	30.00	1	B30-R10000-WT
∞	B30C-4000-7569-OR	Orange	101.00	30.00	1	B30-R10000
∞	B30C-4000-7569-RD	Red	101.00	30.00	1	B30-R10000-WT
∞	B30C-4000-7569-WT	White	101.00	30.00	1	B30-R10000
∞	B30C-4000-7569-YL	Yellow	101.00	30.00	1	B30-R10000



## B-549 Cold temperature application material

For identification in temperature as cold as -40°C

- Special adhesive permanently adheres to extremely cold surfaces
- Ideal for cold storage warehouses, fridges, freezers and short-term outdoor use in winter
- Service temp: -40 °C to 100 °C
- Application temp: -23 °C to 100 °C




Diagram	Order Reference	Colour	Label Width A (mm)	Label Length B (m)	Labels per Roll	Printer Ribbon Series
B-549: Polyester						
∞	B30C-1125-549-WT	White	28.58	30.48	1	B30-R10000
∞	B30C-1125-549-YL	Yellow	28.58	30.48	1	B30-R10000
∞	B30C-2250-549-WT	White	57.15	30.48	1	B30-R10000
∞	B30C-2250-549-YL	Yellow	57.15	30.48	1	B30-R10000
∞	B30C-4000-549-WT	White	101.60	30.48	1	B30-R10000
∞	B30C-4000-549-YL	Yellow	101.60	30.48	1	B30-R10000

## B-461, B-490, B-492, B-498 & B-499 Vial & tube labels

Always have clear, legible specimen samples

- Labels are designed to withstand extreme laboratory environments
- Resistant to laboratory solvents like Xylene, ethanol, alcohol and DMSO
- Identification is always legible – and will not smear, fade or fall off
- B-490, can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492, can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
<b>0.5 - 0.7 ml</b>										
●	B-490	<b>F H L</b>	12.70	19.05	-	-	-	B33-68-490	B30 Monocolour Series	2500
●	B-499	<b>F A</b>	12.70	19.05	-	12.70	19.05	B33-68-499	B30 Monocolour Series	1500
●	B-498	<b>F R</b>	12.70	19.05	-	12.70	19.05	B33-68-498	B30 Monocolour Series	5000
▲	B-499	<b>F A</b>	12.70	25.40	-	-	-	B33-620-499	B30-R6000HF	1000
●	B-499	<b>F A</b>	25.40	9.53	-	-	-	B33-152-499	B30 Monocolour Series	1500
◆	B-461	<b>F A H S L</b>	25.40	9.53	9.53	20.00	9.53	B33-606-461	B30-R4300	1000
▷	B-461	<b>F A H S L</b>	55.88	12.70	-	19.05	12.70	B33-127-461	B30 Monocolour Series	1500
<b>0.5 - 8.0 ml</b>										
▲	B-490	<b>F H L</b>	22.86	12.70	-	-	-	B33-125-490	B30 Monocolour Series	1650
<b>0.5 ml</b>										
●	B-499	<b>F A</b>	6.35	36.50	-	-	-	B33-90-499	B30 Monocolour Series	2500
●	B-499	<b>F A</b>	19.05	6.35	-	-	-	B33-1-499	B30 Monocolour Series	10000
<b>0.6 ml</b>										
▲	B-499	<b>F A</b>	22.86	12.70	-	-	-	B33-125-499	B30 Monocolour Series	1500
<b>1.0 - 2.0 ml</b>										
▷	B-461	<b>F A H S L</b>	15.24	38.10	-	15.24	33.03	B33-628-461	B30-R4300	2500
▷	B-461	<b>F A H S L</b>	15.24	66.68	-	15.24	25.40	B33-612-461	B30-R4300	1500
⊕	B-499	<b>F A</b>	25.40	9.53	9.53	-	-	B33-163-499	B30 Monocolour Series	1500
⊕	B-492	<b>F H L</b>	25.40	9.53	9.53	-	-	B33-163-492	B30 Monocolour Series	1500
⊕	B-492	<b>F H L</b>	25.40	12.70	9.53	-	-	B33-181-492	B30 Monocolour Series	1500
⊕	B-492	<b>F H L</b>	25.40	12.70	11.18	-	-	B33-182-492	B30 Monocolour Series	1500
▷	B-461	<b>F A H S L</b>	25.40	44.45	-	25.40	25.40	B33-183-461	B30 Monocolour Series	2000
◇	B-461	<b>F A H S L</b>	41.28	15.24	12.70	30.00	15.24	B33-608-461	B30-R4300	1000
<b>1.0 - 8.0 ml</b>										
●	B-499	<b>F A</b>	19.05	23.80	-	-	-	B33-91-499	B30 Monocolour Series	2500
●	B-498	<b>F R</b>	19.05	23.80	-	19.05	-	B33-91-498	B30 Monocolour Series	2500
⊕	B-499	<b>F A</b>	22.86	12.70	12.70	-	-	B33-126-499	B30 Monocolour Series	1500
⊕	B-490	<b>F H L</b>	22.86	12.70	12.70	-	-	B33-126-490	B30 Monocolour Series	2500
●	B-498	<b>F R</b>	25.40	19.05	-	25.40	19.05	B33-88-498	B30 Monocolour Series	2500
▲	B-492	<b>F H L</b>	41.28	15.24	-	-	-	B33-155-492	B30 Monocolour Series	1500
▲	B-490	<b>F H L</b>	41.28	15.24	-	-	-	B33-155-490	B30 Monocolour Series	1500
⊕	B-492	<b>F H L</b>	41.28	15.24	9.53	-	-	B33-190-492	B30 Monocolour Series	1500
▲	B-492	<b>F H L</b>	48.26	25.40	-	-	-	B33-156-492	B30 Monocolour Series	1500
▲	B-490	<b>F H L</b>	48.26	25.40	-	-	-	B33-156-490	B30 Monocolour Series	1500
▷	B-461	<b>F A H S L</b>	66.68	15.24	-	25.40	15.24	B33-153-461	B30 Monocolour Series	1500
<b>1.5 - 2.0 ml</b>										
▷	B-461	<b>F A H S L</b>	15.24	41.28	-	15.24	25.40	B33-133-461	B30 Monocolour Series	1500
▲	B-492	<b>F H L</b>	25.40	12.70	-	-	-	B33-59-492	B30 Monocolour Series	2500
<b>1.5 - 8.0 ml</b>										
●	B-492	<b>F H L</b>	25.40	9.53	-	-	-	B33-152-492	B30 Monocolour Series	2500
<b>2.0 - 4.0 ml</b>										
▷	B-461	<b>F A H S L</b>	15.24	48.26	-	15.24	40.00	B33-638-461	B30-R4300	2000
<b>2.0 - 8.0 ml</b>										
▲	B-492	<b>F H L</b>	22.86	25.40	-	-	-	B33-180-492	B30 Monocolour Series	1500
●	B-499	<b>F A</b>	25.40	19.05	-	-	-	B33-88-499	B30 Monocolour Series	2500
▲	B-492	<b>F H L</b>	25.40	25.40	-	-	-	B33-179-492	B30 Monocolour Series	1900
<b>4.0 - 8.0 ml</b>										
●	B-499	<b>F A</b>	25.40	66.68	-	-	-	B33-625-499	B30-R6000HF	1500

>>

**F** Freezer environment **N** Liquid nitrogen environment **A** Autoclave environment **H** Hot water bath (100°C) **S** Self-laminating label **L** Low-profile (extremely thin) label **R** Removable


## B-461, B-490, B-492, B-498 & B-499 Vial & tube labels (Continued)

Always have clear, legible specimen samples

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
<b>4.0 - 50.0 ml</b>										
	B-461	<b>F A H S L</b>	34.93	45.72	-	34.93	40.00	B33-632-461	B30-R4300	1500
<b>12.0 - 24.0 ml</b>										
	B-499	<b>F A</b>	12.70	36.50	-	-	-	B33-87-499	B30 Monocolour Series	2500
	B-498	<b>F R</b>	12.70	36.50	-	12.70	-	B33-87-498	B30 Monocolour Series	2500
<b>12.0 - 50.0 ml</b>										
	B-499	<b>F A</b>	25.40	101.60	-	-	-	B33-326-499	B30 Monocolour Series	450
	B-498	<b>F R</b>	25.40	101.60	-	-	-	B33-326-498	B30 Monocolour Series	450
	B-461	<b>F A H S L</b>	25.40	133.35	-	25.40	38.10	B33-139-461	B30 Monocolour Series	650
<b>14.0 - 15.0 ml</b>										
	B-490	<b>F H L</b>	55.88	38.10	-	-	-	B33-157-490	B30 Monocolour Series	1000
<b>15.0 - 50.0 ml</b>										
	B-499	<b>F A</b>	12.70	25.40	-	-	-	B33-611-499	B30-R6000HF	3000
	B-499	<b>F A</b>	25.40	12.45	-	-	-	B33-659-499	B30-R6000HF	1000
	B-499	<b>F A</b>	25.40	36.50	-	-	-	B33-621-499	B30-R6000HF	3000
	B-498	<b>F R</b>	25.40	36.50	-	25.40	-	B33-89-498	B30 Monocolour Series	2300
	B-499	<b>F A</b>	25.40	36.58	-	-	-	B33-89-499	B30 Monocolour Series	2300
	B-461	<b>F A H S L</b>	66.68	25.40	-	25.40	25.40	B33-276-461	B30 Monocolour Series	1500
	B-461	<b>F A H S L</b>	88.90	38.10	-	38.10	31.75	B33-134-461	B30 Monocolour Series	1000
<b>50.0 ml</b>										
	B-499	<b>F A</b>	19.05	19.05	-	-	-	B33-254-499	B30 Monocolour Series	1000
	B-498	<b>F R</b>	19.05	19.05	-	-	-	B33-254-498	B30 Monocolour Series	1000
	B-499	<b>F A</b>	25.40	12.70	-	-	-	B33-5-499	B30 Monocolour Series	5000
	B-498	<b>F R</b>	25.40	12.70	-	25.40	-	B33-5-498	B30 Monocolour Series	5000
	B-499	<b>F A</b>	25.40	63.50	-	-	-	B33-325-499	B30 Monocolour Series	700
	B-498	<b>F R</b>	25.40	63.50	-	-	-	B33-325-498	B30 Monocolour Series	700
	B-499	<b>F A</b>	38.10	101.60	-	-	-	B33-327-499	B30 Monocolour Series	450
	B-498	<b>F R</b>	38.10	101.60	-	-	-	B33-327-498	B30 Monocolour Series	450
	B-499	<b>F A</b>	38.10	152.40	-	-	-	B33-328-499	B30 Monocolour Series	300
	B-498	<b>F R</b>	38.10	152.40	-	-	-	B33-328-498	B30 Monocolour Series	300
	B-490	<b>F H L</b>	50.80	6.35	-	-	-	B33-151-490	B30 Monocolour Series	2500



### B-461, B-490 & B-492 Centrifuge, Eppendorf & PCR tube labels



Stays put in harsh conditions and resist common laboratory chemicals

- Thin construction that prevents jamming in centrifuges and racks
- Long and short tails styles provide window for viewing liquids level in tube
- B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
<b>0.5 - 0.7 ml</b>									
	B-461	<b>F N A H S L</b>	5.08	22.86	5.08	18.23	B33-614-461	B30-R4300	2000
	B-490	<b>F N H L</b>	12.70	19.05	-	-	B33-68-490	B30 Monocolour Series	2500
	B-490	<b>F N H L</b>	31.75	9.53	-	-	B33-154-490	B30 Monocolour Series	1500
	B-461	<b>F N A H S L</b>	45.72	9.53	19.05	9.53	B33-123-461	B30 Monocolour Series	1500
	B-461	<b>F N A H S L</b>	45.72	12.70	19.05	12.70	B33-122-461	B30 Monocolour Series	1500
	B-461	<b>F N A H S L</b>	55.88	12.70	19.05	12.70	B33-127-461	B30 Monocolour Series	1500
<b>0.5 ml</b>									
	B-461	<b>F N A H S L</b>	6.35	27.94	6.35	22.00	B33-627-461	B30-R4300	1000
<b>1.0 - 8.0 ml</b>									
	B-492	<b>F N H L</b>	41.28	15.24	-	-	B33-155-492	B30 Monocolour Series	1500
	B-490	<b>F N H L</b>	41.28	15.24	-	-	B33-155-490	B30 Monocolour Series	1500
	B-461	<b>F N A H S L</b>	66.68	15.24	25.40	15.24	B33-153-461	B30 Monocolour Series	1500
<b>1.5 - 8.0 ml</b>									
	B-492	<b>F N H L</b>	25.40	9.53	-	-	B33-152-492	B30 Monocolour Series	2500

## B-461, B-490, B-492 & B-499 Conical / Large tube labels

Use these labels for labelling larger tube sizes, while still providing the needed temperature and chemical resistance properties

- B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
<b>0.5 - 0.7 ml</b>										
●	B-499	<b>F A</b>	12.70	19.05	-	12.70	19.05	B33-68-499	B30 Monocolour Series	1500
▲	B-499	<b>F A</b>	12.70	25.40	-	-	-	B33-620-499	B30-R6000HF	1000
●	B-499	<b>F A</b>	25.40	9.53	-	-	-	B33-152-499	B30 Monocolour Series	1500
▷	B-461	<b>F A H S L</b>	55.88	12.70	-	19.05	12.70	B33-127-461	B30 Monocolour Series	1500
<b>0.6 ml</b>										
▲	B-499	<b>F A</b>	22.86	12.70	-	-	-	B33-125-499	B30 Monocolour Series	1500
<b>1.0 - 2.0 ml</b>										
▷	B-461	<b>F A H S L</b>	15.24	38.10	-	15.24	33.03	B33-628-461	B30-R4300	2500
▷	B-461	<b>F A H S L</b>	15.24	66.68	-	15.24	25.40	B33-612-461	B30-R4300	1500
○	B-461	<b>F A H S L</b>	41.28	15.24	12.70	30.00	15.24	B33-608-461	B30-R4300	1000
<b>1.0 - 8.0 ml</b>										
●	B-499	<b>F A</b>	19.05	23.80	-	-	-	B33-91-499	B30 Monocolour Series	2500
⊕	B-499	<b>F A</b>	22.86	12.70	12.70	-	-	B33-126-499	B30 Monocolour Series	1500
▲	B-492	<b>F H L</b>	41.28	15.24	-	-	-	B33-155-492	B30 Monocolour Series	1500
▲	B-490	<b>F H L</b>	41.28	15.24	-	-	-	B33-155-490	B30 Monocolour Series	1500
⊕	B-492	<b>F H L</b>	41.28	15.24	9.53	-	-	B33-190-492	B30 Monocolour Series	1500
▲	B-492	<b>F H L</b>	48.26	25.40	-	-	-	B33-156-492	B30 Monocolour Series	1500
<b>1.5 - 2.0 ml</b>										
▷	B-461	<b>F A H S L</b>	15.24	41.28	-	15.24	25.40	B33-133-461	B30 Monocolour Series	1500
▲	B-492	<b>F H L</b>	25.40	12.70	-	-	-	B33-59-492	B30 Monocolour Series	2500
<b>1.5 - 8.0 ml</b>										
●	B-492	<b>F H L</b>	25.40	9.53	-	-	-	B33-152-492	B30 Monocolour Series	2500
<b>2.0 - 4.0 ml</b>										
▷	B-461	<b>F A H S L</b>	15.24	48.26	-	15.24	40.00	B33-638-461	B30-R4300	2000
<b>2.0 - 8.0 ml</b>										
●	B-499	<b>F A</b>	25.40	19.05	-	-	-	B33-88-499	B30 Monocolour Series	2500
▲	B-492	<b>F H L</b>	25.40	25.40	-	-	-	B33-179-492	B30 Monocolour Series	1900
<b>4.0 - 8.0 ml</b>										
●	B-499	<b>F A</b>	25.40	66.68	-	-	-	B33-625-499	B30-R6000HF	1500
<b>4.0 - 50.0 ml</b>										
▷	B-461	<b>F A H S L</b>	34.93	45.72	-	34.93	40.00	B33-632-461	B30-R4300	1500
<b>12.0 - 24.0 ml</b>										
●	B-499	<b>F A</b>	12.70	36.50	-	-	-	B33-87-499	B30 Monocolour Series	2500
<b>12.0 - 50.0 ml</b>										
●	B-499	<b>F A</b>	25.40	101.60	-	-	-	B33-326-499	B30 Monocolour Series	450
▷	B-461	<b>F A H S L</b>	25.40	133.35	-	25.40	38.10	B33-139-461	B30 Monocolour Series	650
<b>15.0 - 50.0 ml</b>										
●	B-499	<b>F A</b>	20.32	36.50	-	20.32	-	B33-165-499	B30 Monocolour Series	2500
●	B-499	<b>F A</b>	25.40	36.50	-	-	-	B33-621-499	B30-R6000HF	3000
●	B-499	<b>F A</b>	25.40	36.58	-	-	-	B33-89-499	B30 Monocolour Series	2300
▲	B-461	<b>F A H S L</b>	48.26	25.40	-	48.26	25.40	B33-636-461AW	B30-R4300	2000
▲	B-461	<b>F A H L</b>	57.15	19.05	-	57.15	19.05	B33-642-461AW	B30-R4300	2000
▷	B-461	<b>F A H S L</b>	66.68	25.40	-	25.40	25.40	B33-276-461	B30 Monocolour Series	1500
▷	B-461	<b>F A H S L</b>	88.90	38.10	-	38.10	31.75	B33-134-461	B30 Monocolour Series	1000
▲	B-461	<b>F A H S L</b>	88.90	38.10	-	88.90	38.10	B33-650-461AW	B30-R4300	2000
<b>50.0 ml</b>										
▲	B-499	<b>F A</b>	19.05	19.05	-	-	-	B33-254-499	B30 Monocolour Series	1000
▷	B-461	<b>F A H S L</b>	19.05	38.10	-	19.05	33.02	B33-629-461	B30-R4300	2500
●	B-499	<b>F A</b>	25.40	12.70	-	-	-	B33-5-499	B30 Monocolour Series	5000
●	B-499	<b>F A</b>	25.40	63.50	-	-	-	B33-325-499	B30 Monocolour Series	700
▲	B-499	<b>F A</b>	38.10	19.05	-	-	-	B33-136-499	B30 Monocolour Series	1500
●	B-499	<b>F A</b>	38.10	101.60	-	-	-	B33-327-499	B30 Monocolour Series	450
●	B-499	<b>F A</b>	38.10	152.40	-	-	-	B33-328-499	B30 Monocolour Series	300
▲	B-490	<b>F H L</b>	50.80	6.35	-	-	-	B33-151-490	B30 Monocolour Series	2500
▲	B-499	<b>F A</b>	50.80	25.40	-	-	-	B33-137-499	B30 Monocolour Series	1100
▲	B-490	<b>F H L</b>	95.25	38.10	-	-	-	B33-158-490	B30 Monocolour Series	1000

\*AW = All white / no transparent area



## B-461, B-490, B-492 & B-499 Vial top labels

Identify the tops of your tubes with these circular labels, or use the combined vial and vial top labels

- B-490 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen. Material must slightly overlap itself
- B-492 can be applied to frozen surfaces including glass and polypropylene stored in liquid nitrogen.







Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
0.5 - 0.7 ml										
◆	B-461	<b>F A H S L</b>	25.40	9.53	9.53	20.00	9.53	B33-606-461	B30-R4300	1000
0.6 - 1.5 ml										
/	B-499	<b>F A</b>	-	-	9.53	-	-	B33-143-499	B30 Monocolour Series	1500
/	B-492	<b>F H L</b>	-	-	9.53	-	-	B33-143-492	B30 Monocolour Series	1500
0.6 - 50.0 ml										
/	B-499	<b>F A</b>	-	-	9.53	-	-	B33-602-499	B30-R6000HF	3000
/	B-499	<b>F A</b>	-	-	9.53	-	-	B33-602-499YL	B30-R6000HF	3000
/	B-461	<b>F A H S L</b>	-	-	9.53	-	-	B33-602-461AW	B30-R4300	3000
/	B-499	<b>F A</b>	-	-	12.70	-	-	B33-603-499	B30-R6000HF	3000
/	B-499	<b>F A</b>	-	-	12.70	-	-	B33-603-499YL	B30-R6000HF	3000
/	B-461	<b>F A H S L</b>	-	-	15.24	-	-	B33-604-461AW	B30-R4300	3000
1.0 - 2.0 ml										
/	B-499	<b>F A</b>	-	-	12.70	-	-	B33-144-499	B30 Monocolour Series	1500
/	B-492	<b>F H L</b>	-	-	12.70	-	-	B33-144-492	B30 Monocolour Series	1500
/	B-490	<b>F H L</b>	-	-	12.70	-	-	B33-144-490	B30 Monocolour Series	2500
⊗	B-499	<b>F A</b>	25.40	9.53	9.53	-	-	B33-163-499	B30 Monocolour Series	1500
⊗	B-492	<b>F H L</b>	25.40	9.53	9.53	-	-	B33-163-492	B30 Monocolour Series	1500
⊗	B-492	<b>F H L</b>	25.40	12.70	11.18	-	-	B33-182-492	B30 Monocolour Series	1500
○	B-461	<b>F A H S L</b>	41.28	15.24	12.70	30.00	15.24	B33-608-461	B30-R4300	1000
1.0 - 8.0 ml										
⊗	B-499	<b>F A</b>	22.86	12.70	12.70	-	-	B33-126-499	B30 Monocolour Series	1500
⊗	B-490	<b>F H L</b>	22.86	12.70	12.70	-	-	B33-126-490	B30 Monocolour Series	2500
⊗	B-492	<b>F H L</b>	41.28	15.24	9.53	-	-	B33-190-492	B30 Monocolour Series	1500

## B-7425 Polypropylene labels

Track almost any sample in the lab

- Offers excellent all-purpose sample traceability
- Stays attached to vials, tubes, slides and well plates
- Remains legible when exposed to chemicals and extreme temperatures

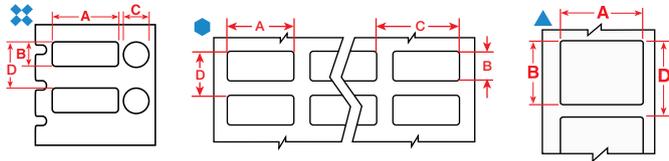


Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Diameter C (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
-										
▲	B-7425	F A H	50.80	12.70	-	50.80	12.70	B33-53-7425	B30 Monocolour Series	2000
0.5 - 0.7 ml										
●	B-7425	F A H	25.40	9.53	-	25.40	9.53	B33-152-7425	B30 Monocolour Series	2000
0.5 - 8.0 ml										
⊛	B-7425	F A H	25.40	9.53	9.53	25.40	9.53	B33-249-7425	B30 Monocolour Series	1500
▲	B-7425	F A H	25.40	12.70	11.18	25.40	9.53	B33-251-7425	B30 Monocolour Series	1500
1.0 - 2.0 ml										
▲	B-7425	F A H	20.96	6.35	-	20.96	6.35	B33-257-7425	B30 Monocolour Series	1500
1.0 - 8.0 ml										
●	B-7425	F A H	25.40	19.05	-	25.40	19.05	B33-88-7425	B30 Monocolour Series	2000
▲	B-7425	F A H	38.10	44.45	-	38.10	44.45	B33-258-7425	B30 Monocolour Series	900
1.0 ml										
▲	B-7425	F A H	33.02	15.24	-	33.02	15.24	B33-256-7425	B30 Monocolour Series	1500
1.5 - 2.0 ml										
▲	B-7425	F A H	25.40	12.70	-	25.40	12.70	B33-59-7425	B30 Monocolour Series	2000
2.0 ml										
●	B-7425	F A H	38.10	12.70	-	38.10	12.70	B33-37-7425	B30 Monocolour Series	1500
15.0 ml										
▲	B-7425	F A H	38.10	25.40	-	38.10	25.40	B33-235-7425	B30 Monocolour Series	1250
50.0 ml										
▲	B-7425	F A H	25.40	25.40	-	25.40	25.40	B33-179-7425	B30 Monocolour Series	1500
▲	B-7425	F A H	38.10	19.05	-	-	-	B33-136-7425	B30 Monocolour Series	1500
⊛	B-7425	F A H	50.80	6.35	-	50.80	6.35	B33-151-7425	B30 Monocolour Series	2000
▲	B-7425	F A H	50.80	25.40	-	50.80	25.40	B33-137-7425	B30 Monocolour Series	1500

## B-7425-AC Sterilisation indicating labels

Label confirms successful sterilisation





Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
15.0 ml								
▲	B-7425		38.10	25.40	38.10	B33-235-7425-AC	B30 Monocolour Series	1250
50.0 ml								
▲	B-7425		50.80	25.40	50.80	B33-137-7425-AC	B30 Monocolour Series	1500




## B-488 Well plate labels

Our well plate labels guarantee crystal clear text and barcoding for most laboratory environments

- Chemically-resistant polyester made to fit common well plate sizes


Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
●	B-488	<b>F</b> <b>A</b>	22.86	19.05	B33-616-488	B30-R4300	3000
●	B-488	<b>F</b> <b>A</b>	22.86	22.86	B33-617-488	B30-R4300	3000
▲	B-488	<b>F</b> <b>A</b>	48.26	6.35	B33-635-488	B30-R4300	2000



## B-498 Re-Identify Tissue Cassettes Labels

Tissue cassettes are often re-identified when labs collect samples from various biorepositories. Typically, each laboratory has its own unique way of identifying samples, which creates a need to re-identify samples in a common way. Brady B-498 post-process labels can be applied directly onto the cassettes, on pure paraffin wax and on top of another label or identifier.

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
●	B-498	<b>F</b> <b>R</b>	19.05	6.35	B33-1-498	B30 Monocolour Series	5000
▲	B-498	<b>F</b> <b>R</b>	19.05	19.05	B33-254-498	B30 Monocolour Series	1000



## B-481 & B-488 Slide labels

Designed to provide crisp and clear sample identification throughout the sample generation, inspection and storage process

- Resistant to xylene, alcohol and DMSO

Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
▲	B-481	<b>F</b> <b>H</b>	22.86	9.53	B33-195-481	B30 Monocolour Series	3000
●	B-488	<b>F</b> <b>A</b>	22.86	19.05	B33-616-488	B30-R4300	3000
▲	B-481	<b>F</b> <b>H</b>	22.86	19.05	B33-194-481	B30 Monocolour Series	2000
●	B-488	<b>F</b> <b>A</b>	22.86	22.86	B33-617-488	B30-R4300	3000
▲	B-481	<b>F</b> <b>H</b>	22.86	22.86	B33-141-481	B30 Monocolour Series	1500
▲	B-488	<b>F</b> <b>A</b>	48.26	6.35	B33-635-488	B30-R4300	2000

## B-427 Straw labelling

These self-laminating labels protect the printed information for lasting identification




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Printable Area Width PW (mm)	Printable Area Height PH (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
0.3 ml									
▷	B-427	<b>F N S</b>	25.40	25.40	25.40	9.53	B33-211-427	B30-R4300	3000
▷	B-427	<b>F N S</b>	25.40	25.40	25.40	9.53	B33-116-427	B30 Monocolour Series	2500
▷	B-427	<b>F N S</b>	44.45	38.10	44.45	12.70	B33-121-427	B30 Monocolour Series	1000
0.5 ml									
▷	B-427	<b>F N S</b>	25.40	63.50	25.40	19.05	B33-511-427	B30-R4300	1500
-									
▷	B-427		25.40	31.75	-	-	B33-117-427	B30 Monocolour Series	2000

## B-488 Bottles, flasks, dishes and general identification

Used to identify a variety of common laboratory glassware items and other consumables




Diagram	Material	Special Properties	Label Width A (mm)	Label Height B (mm)	Order Reference	Printer Ribbon Series	Labels per Roll
●	B-488	<b>F A</b>	22.86	19.05	B33-616-488	B30-R4300	3000
●	B-488	<b>F A</b>	22.86	22.86	B33-617-488	B30-R4300	3000
▲	B-488	<b>F A</b>	48.26	6.35	B33-635-488	B30-R4300	2000

## B-403 Water dissolvable label

The label dissolves within 30 seconds exposure to water




Diagram	Material	Special Properties	Label Width A (mm)	Label Length B (m)	Order Reference	Printer Ribbon Series	Labels per Roll
∞	B-403	<b>R</b>	28.58	30.48	B30C-1125-403-WT	B30-R4300	1
∞	B-403	<b>R</b>	57.15	30.48	B30C-2250-403-WT	B30-R4300	1
∞	B-403	<b>R</b>	76.20	30.48	B30C-3000-403-WT	B30-R4300	1
∞	B-403	<b>R</b>	101.60	30.48	B30C-4000-403-WT	B30-R4300	1

## Print ribbons

“Drop & Click” Print ribbons for quick and easy supply changes



- Tough, smear-proof ribbons that produce long-lasting printed text
- Print can withstand years in industrial areas and outdoor conditions
- Ribbons supplied in self-contained cartridges that drop straight into the printer with a “click”
- No calibrating, no threading, no waste, no hassle and the ink will always be facing the right direction
- Printer notifies user if installed ribbon is not recommended for the installed labels

Order Reference	Colour	Width (mm) x Length (m)
B30-R10000	Black	110.00 x 60.00
B30-R10000-BL	Blue	110.00 x 60.00
B30-R10000-GN	Green	110.00 x 60.00
B30-R10000-OR	Orange	110.00 x 60.00
B30-R10000-RD	Red	110.00 x 60.00
B30-R10000-WT	White	110.00 x 60.00
B30-R10000-YL**	Yellow	110.00 x 60.00
B30-R6000HF	Black	110.00 x 60.00
B30-R4300	Black	110.00 x 60.00
B30-R6600	Black	110.00 x 60.00
B30-R4400-WT	White	110.00 x 60.00
B30-R4500*	Silver	110.00 x 60.00
B30-R6700-WT	White	110.00 x 60.00
B30-R6400	Black	110.00 x 60.00
B30-R6200	Black	110.00 x 60.00
B30-R10000-YL2	Yellow	110.00 x 60.00
B30-R60000C***	Black	110.00 x 60.00



\*This ribbon is for use with B-342 and B-345 black PermaSleeves only

\*\*For printing yellow onto white B-595 use B30-R10000-YL. For printing yellow onto other colours of B-595 use B30-R10000-YL2

\*\*\*Black Heavy-Duty print ribbon to print Ochre B-595

## Print ribbons

Brady Material No.	Material		B30-R4300 Black	B30-R4400-WT White	B30-R4500 Silver	B30-R6000HF Black	B30-R6200 Black	B30-R6300 Black	B30-R6400 Black	B30-R6600 Black	B30-R6700-WT White	B30-R10000 Black	B30-R10000-WT White	B30-R10000 Blue	B30-R10000-YL2 Yellow
B-342	Heat-shrink Polyolefin Sleeve	Matt	✓		✓					✓					
B-345	High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve	Matt		✓		✓				✓					
B-413	Metallic, Non-metal Polyester	Satin				✓	✓								
B-417	Self-laminating Vinyl	Matt	✓				✓								
B-422	Polyester	Gloss				✓	✓								
B-423	Polyester	Gloss				✓	✓								
B-424	Paper	Matt	✓												
B-425A	Polypropylene	Matt	✓							✓					
B-427	Self-laminating Vinyl	Matt	✓												
B-428/B-966B	Metallised Polyester with Polyester Overlaminate	Gloss	✓				✓								
B-428	Metallised Polyester	Matt	✓												
B-430	Polyester	Gloss		✓		✓	✓								
B-432	Polyester	Gloss		✓		✓									
B-434A	Metallised Polyester	Gloss				✓									
B-435A	Metallised Polyester	Gloss				✓									
B-437	Polyvinylfluoride	Matt	✓												
B-438	Tamper-evident Metallised Polyester	Matt	✓									✓			
B-461	Self-laminating Polyester	Matt	✓				✓								
B-472	Polyimide	Matt	✓				✓								
B-481	StainerBondz™ Polyester	Matt								✓					
B-483A	Polyester	Gloss				✓									
B-484A	Polyester	Gloss				✓									
B-486B	Metallised Polyester	Matt	✓												
B-488	Polyester	Matt	✓												
B-489A	Polyester	Matt	✓												
B-490	FreezerBondz™ Polyester	Matt	✓												
B-492	FreezerBondz™ Polyester	Matt								✓					
B-498	Vinyl Cloth	Semi-gloss	✓				✓								
B-499	Nylon Cloth	Matt	✓			✓	✓								
B-509	Magnetic Polyester	Matt				✓						✓		✓	
B-526	Phosphorescent Polyester	Gloss				✓						✓		✓	
B-549	Polyester	Gloss								✓		✓	✓	✓	
B-551	Polyester Tag	Matt				✓						✓	✓	✓	
B-565	Metallised Polyester	Matt				✓						✓			
B-569	Polyester	Gloss				✓						✓	✓	✓	
B-581	Vinyl	Gloss				✓						✓	✓	✓	
B-584	Reflective Tape	Gloss				✓						✓		✓	
B-593	Polyester	Gloss		✓		✓									
B-595	Vinyl	Gloss				✓					✓	✓	✓	✓	✓
B-717	Polyimide	Gloss				✓									
B-718	Polyimide	Gloss				✓									
B-719	Polyimide	Matt				✓									
B-724	Polyimide	Matt	✓												
B-727	Polyimide	Gloss				✓									
B-728	Polyimide	Matt				✓									
B-729	Polyimide	Matt				✓									
B-777	Polyimide	Gloss							✓						
B-854	Metal Detectable Polyester	Matt				✓									
B-855	Polyester	Matt				✓									
B-7563	Metallised Polyester	Satin				✓	✓								
B-7569	Vinyl	Gloss				✓						✓	✓	✓	
B-7597	Polyethylene Tag	Matt	✓												
B-7641	Heat-shrink Polyolefin Sleeve	Matt				✓									
B-7642	Heat-shrink Polyolefin Sleeve	Matt	✓							✓					
B-8423	Polyester	Satin				✓	✓								
B-8591	Polymer	Gloss								✓					

\*This ribbon is for use with B-342 and B-345 Black PermaSleeves only \*\*For printing yellow onto white B-595 use B30-R10000-YL. For printing yellow onto other colours of B-595 use B30-R10000-YL2


## Brady Workstation

Brady Workstation offers professional, intuitive apps to design quality product and cable labels and safety signs. Label design becomes easier, faster and quickly adaptable to new label norms thanks to centralised updates.

### Select the apps you need

Simply select the apps you need, download the 30-day trial and purchase when satisfied. Available product, cable, safety and facility identification apps enable you to:

- design and edit custom labels and signs
- design label templates and lock elements for consistency
- create text-only cable labels
- automate label creation
- easily import data
- easily set up complex label sequences
- easily design CLP-chemical labels
- print lockout procedures, tags and energy source labels
- design safety and facility signs.

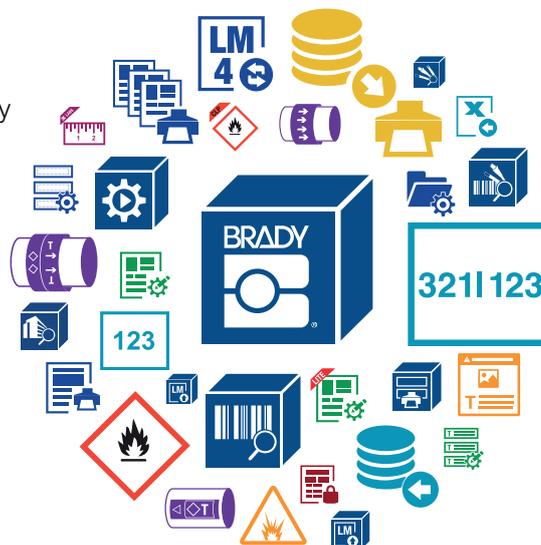

### Available in multiple languages

Brady Workstation apps are available in more than 20 languages, including English, French, German, Russian, Spanish, Italian, Polish and Dutch. Select your language before downloading from the drop down menu.

### Easily connect to your printer

Brady Workstation works seamlessly with a range of Brady desktop and portable printers. Brady's high-end label printers also offer bi-directional communication with Brady Workstation and will inform users if they have to switch label materials to print specific label designs. Printer compatibility is shown in Brady Workstation on an app by app basis.

#### Brady Workstation Basic Design Software Suite

Get everyone in your facility up and running quickly on as many computers as you like with this free label creation software! You'll have basic design, formatting, graphics and simple barcode libraries to create labels like a pro!

The Basic Suite is included with every printer, all you need to do is download it. [Workstation.BradyID.com/Free](http://Workstation.BradyID.com/Free)



#### Brady Workstation Product and Wire Identification Software Suite

Quickly identify your products and wires with customised text or graphical labels, using serialised or imported data. [Workstation.BradyID.com/ProductandWire](http://Workstation.BradyID.com/ProductandWire)



#### Brady Workstation Safety and Facility Identification Software Suite

Keep your facility safe and compliant by creating custom signs, label and pipemarkers, adding visual safety guidance. [Workstation.BradyID.com/SafetyAndFacility](http://Workstation.BradyID.com/SafetyAndFacility)



#### Brady Workstation Laboratory Identification Software Suite

Easily identify any sample with the most wanted laboratory sample label design apps in our Brady Workstation Lab suite. [Workstation.BradyID.com/lab](http://Workstation.BradyID.com/lab)



PRINTER	
Description	BradyPrinter i5300 Industrial Label Printer
Includes	This i5300 Industrial Label Printer comes in a cardboard box. It ships with a Brady WorkStation Basic Design Suite, a Power Cable, a USB Cable, a Stylus, a cleaning kit, a QuickStart Guide, a Jump drive with How To Videos and 3rd Party Win Driver.
Applications	Wire and cable labelling, Circuit board labelling, Barcode labelling, Laboratory labelling, Electrical labelling, Data and telecommunications labelling, Component and equipment labelling, Pipe and valve marking, Facility identification, Asset tracking, General identification, Solar Panel labelling
Print Resolution (dpi)	300 / 600
Print Speed (mm/sec)	254.00 mm/s
Stand-alone Printing (Detached from PC)	Peripheral
Internal Memory Capacity	512 MB RAM, 195 MB IFFS Flash
Colour Capability	Monocolour
Language Support	Bahasa (Indonesian), Bahasa Malay, Bulgarian, Chinese (Traditional & Simplified), Croatian, Czech, Danish, Dutch, English (US), Estonian, Finnish, French (Canada), German, Hungarian, Japanese, Korean, Norwegian (Bokmål), Polish, Portuguese, Romanian, Russian, Slovak, Spanish (universal), Thai, Turkish, Vietnamese
Weight (kg)	15.0 kg
Width x Height x Depth (mm)	284.48 x 279.40 x 401.32
Calibration	No
Operating Temperature	10°C - 40°C
Operating Humidity	10%-85% (RH non-condensing)
Storage Temperature	-20°C - 50°C
Storage Humidity	15%-90% (RH non-condensing)
Warranty	2 years



MEDIA	
Continuous vs Die-cut Labels	Continuous and Die-cut
Compatible Media	B30-, B30C-, B30EP-, B33-, B33C-, B33D-, B33FP-, B33FT-, B33R-
Custom Labels	Yes
Number of Stock Parts	1200+ standard parts
Materials Supported	Direct Thermal Paper, FreezerBondz™ Polyester, Heat-shrink Polyolefin, High Temperature Heat-shrink Polyvinylidene Fluoride Sleeve, Magnetic Polyester, Metal-detectable Polyester, Metallic, Non-metal Polyester, Metallised Polyester, Metallised Polyester with Polyester Overlaminate, Nylon Cloth, Paper, Phosphorescent Polyester, Polyester, Polyester with Polyester Overlaminate, Polyimide, Polyolefin, Polypropylene, Polyvinylfluoride, Reflective Tape, Self-laminating Polyester, Self-laminating Vinyl, StainerBondz™ Polyester, Static Dissipative Polyester, Tamper-evident Metallised Polyester, Vinyl, Vinyl Cloth
Max. Label Width (mm)	107.95
Min. Label Width (mm)	6.35
Max. Liner Width (mm)	107.95
Min. Liner Width (mm)	18.03
Max. Print Width (mm)	101.98
Recommended Usage per Day	5000
POWER SUPPLY	
Power Supply	AC Adaptor
Power Supply Voltage	100 - 240 V @ 50 - 60 Hz
DISPLAY	
Display	Colour LCD Touchscreen
Display Resolution	1024 x 800 pixels
On Screen Indicators	Ribbon and label part number recognition, Supply Remaining, Data Reception, Ethernet Status, WiFi, Error Messaging
SOFTWARE & CONNECTIVITY	
Connectivity Options	Cabled, Ethernet, USB 2.0, USB Host
Software Compatibility	Brady Workstation, Windows based driver for 3rd party software use
Programlama Dili	BPL (Brady Programming Language)
FONTS/GRAPHICS/SYMBOLOGIES	
Built-in Fonts	Arial, Courier New, Tahoma, Times New Roman, Trebuchet MS, Verdana, TrueType fonts storable to printer
Bar Code Type	Codabar, Code 128A, Code 128B, Code 128C, Code 39, Code 93, EAN-13, EAN-8, HIBC, Interleaved 2 of 5, JAN-8, JAN-8, MSI, Plessey, UPC-A, Aztec, Data Matrix, PDF417, QR code

\* General volume levels for directional model comparison purposes only. Assumes basic text on 1"x2" vinyl labels. Actual results vary depending on combination of material, burn and speed settings, label content, ambient temperature and length of print run.

\*\* User should test to the application. Print performance on small parts or parts smaller than a printer's minimum label dimension spec is dependent on multiple factors including print speed, quantity in print run, heat setting, and the size/layout of the printed elements. Windows® is a registered trademark of Microsoft Corporation.



Learn more about the BradyPrinter i5300 on :

[www.bradyeurope.com/i5300](http://www.bradyeurope.com/i5300)

**Africa**

Randburg, South Africa  
 Tel.: +27 11 704 3295  
 Email: africa@bradycorp.com

**Benelux**

Zele, Belgium  
 Tel.: +32 (0) 52 45 78 11  
 Email: benelux@bradycorp.com

**Central & Eastern Europe**

Bratislava, Slovakia  
 Tel.: +421 2 3300 4800  
 Email: central\_europe@bradycorp.com

**Denmark**

Odense  
 Tel.: +45 66 14 44 00  
 Email: denmark@bradycorp.com

**France**

Roncq  
 Tel.: +33 (0) 3 20 76 94 48  
 Email: france@bradycorp.com

**Germany, Austria & Switzerland**

Egelsbach, Germany  
 Tel.: +49 (0) 6103 7598 660  
 Email: germany@bradycorp.com

**Hungary**

Budaörs  
 Tel.: +36 23 500 275  
 Email: central\_europe@bradycorp.com

**Italy**

Gorgonzola  
 Tel.: +39 02 26 00 00 22  
 Email: italy@bradycorp.com

**Middle East FZE**

Dubai, UAE  
 Tel.: +971 4881 2524  
 Email: me@bradycorp.com

**Norway**

Kjeller  
 Tel.: +47 70 13 40 00  
 Email: norway@bradycorp.com

**Spain & Portugal**

Madrid, Spain  
 Tel.: +34 900 902 993  
 Email: spain@bradycorp.com,  
 portugal@bradycorp.com

**Sweden, Finland, Baltic states**

Kista, Sweden  
 Tel.: +46 (0) 8 590 057 30  
 Email: sweden@bradyeurope.com

**Turkey**

Istanbul  
 Tel.: +90 212 264 02 20 / 264 02 21  
 Email: turkey@bradycorp.com

**UK & Ireland**

Banbury, UK  
 Tel.: +44 (0) 1295 228 288  
 Email: uk@bradycorp.com

# Our mission is to identify and protect people, products and premises



To help minimise our impact on the environment, Brady limits its number of reprints.

Updated versions are always available for download on [www.bradyeurope.com](http://www.bradyeurope.com).

 Search for: EUR-M-258-EN



Y5107321

Your distributor

24.01.2023